

INDUSTRIAL
AIR CONDITIONING

Product catalogue

2015


ferroli

FERROLI PRODUCT RANGE			26	
MAIN CHARACTERISTICS WATER CHILLERS			30	
AIR COOLED WATER CHILLERS				
With axial fans	RXA-I	R410A	38	NEW
	RXA	R410A	42	
	RMA ²	R410A	46	
	RMA ² HE	R410A	50	
	RGA	R410A	54	
	RGA HE	R410A	58	
	RGA ST	R410A	62	
	RTA	R410A	66	
	RLA	R410A	70	
	RLA HE	R410A	74	
	RLA ST	R410A	78	
	RHA	R410A	82	
	RHA HE	R410A	86	
	RHA ST	R410A	90	
	RHV	R134A	94	
	RHV HE	R134A	98	
With centrifugal fans	RMP ²	R410A	102	
	RMP ² HE	R410A	106	
	RGC	R410A	110	
	RGC HE	R410A	114	
AIR COOLED WATER CHILLERS FREECOOLING				
	RGA FC	R410A	118	NEW
WATER COOLED WATER CHILLERS	RGW	R410A	122	
	RVW	R134A	126	
DIRECT EXPANSION CONDENSING UNITS	CXA	R410A	130	NEW
	CMA ² - CMA ² HE	R410A	132	
	CMP ² - CMP ² HE	R410A	136	
	CGA	R410A	140	
	CGA HE	R410A	144	
	CGC	R410A	148	
	CGC HE	R410A	152	
CONDENSERLESS UNITS	EGW	R410A	156	
	EVW	R134A	160	
MAIN CHARACTERISTICS TERMINAL UNITS			164	
Fan coil unit	Fan coil TOP FAN plus		168	
	Cassette FCS-C		172	
	VTP		176	
Ducted fan coil	MERCURY SP		178	
AIR HANDLING UNITS	FTE		180	
	FTP		180	
PACKAGED ROOF TOP AIR CONDITIONER	RFA	R410A	182	
MAIN SPECIFICATIONS OF HEAT RECOVERY TERMINAL UNITS			186	
HEAT RECOVERY UNITS	UT-REC / UT-REC C		188	
	UT-REC R		192	
	UT-REC DP		194	
	UT-REC DP F		198	

> Ferroli production plant

THE PRODUCTION PLANT OF THE INDUSTRIAL AIR CONDITIONING DIVISION COVERS AN AREA OF 20,000 M² AND IS LOCATED IN VILLANOVA, NEAR SAN BONIFACIO (VR) CLOSE TO THE HEAD QUARTERS. RECENT IMPORTANT INVESTMENTS HAVE BEEN MADE TO IMPROVE AND UPGRADE THE PRODUCTION PROCESS STAGES.

A MICRO-FACTORY WITHIN THE MAIN PRODUCTION FACILITIES WITH **LEAN PRODUCTION** KANBAN SYSTEM PRODUCES HIGH SPECIFICATION FAN COIL TERMINALS.

>>> INDUSTRIAL AIR-CONDITIONING <<<



>> The production process begins with the production of the finned coil in copper and aluminium, complete with a welding and testing line.



>> The assembly cell (picture opposite) assembles the components such as fan-motor, condensate tray and heat exchanger along with the main structure.



>> The final assembling and packaging cell assembles the cabinets and all components, such as valves, supplementary trays, and the controls.



>> Chillers with capacity from 5 to 350 kW are built on the assembly line. The 5 lines total a length of 300 m.



Ferrolì

>> For the testing of medium to high capacity chillers (fig. a-b) there are three test chambers which enables units to be tested according to EUROVENT conditions. A very important investment by FERROLI, which offers our customers guarantee that our equipment fully comply the project specification.

>> The functional tests vary from a minimum of 4 hours for 20 kW units with heat pump (minimum 2 hours for operational mode) and up to 8 hours for 200 kW units (approx. 4 hours per operational mode). Complete test reports are compiled and made available to entire Ferrolì world.

>> Chillers up to 1400 kW (fig. c) are tested by specialised technical personnel who undergo a rigorous and intensive training schedules coordinated by the project engineers. Testing can last up to 8 hours for operation modes, with particular attention to ensuring correct operation of all alarms and adjustment functions of the units. Again complete test reports are compiled and made available to entire Ferrolì world.

>> Charts and reports for monitoring production schedules, efficiency, construction and the safety within the departments are updated and displayed (fig. d) inside the plant are available to all, as well as visiting customers and professionals.

> Laboratory R&D

THE RESEARCH & DEVELOPMENT LABORATORIES ARE THE PRESTIGIOUS AREAS OF FERROLI PRODUCTION FACILITIES. INDIVIDUAL R & D LABORATORIES OPERATING INSIDE THE PRODUCTION PLANT ARE DEDICATED TO INDUSTRIAL AIR CONDITIONING TOTALLING AN AREA OF 1400 M².

ITS MAIN DUTIES INCLUDE DESIGNING PROTOTYPES FOR THE TECHNICAL DEPARTMENT AND CARRYING OUT FUNCTIONAL TESTS IN D.B. AND W.B.

TEMPERATURE CONDITIONS CERTIFIED BY EUROVENT. THE RESEARCH AND DEVELOPMENT STRUCTURE COMPRISES A HEAD OF DEPARTMENT, FOUR TECHNICIANS FOR THE CONSTRUCTION OF PROTOTYPES AND ANOTHER FOUR LABORATORY TECHNICIANS FOR THE TESTINGS. THE NEW LABORATORY IS EQUIPPED WITH:

>> A compensated-type calorimeter **C2**, with a cavity separated chambers, for checking units up to $P=16.5$ kW with the capability of testing units to a temperature of -10°C (**fig. a**).

>> A calibrated-type calorimeter **C1** (with double chamber without cavity separated chambers where losses are taken into account) for checking units up to $P=16.5$ kW and to a temperature of -10°C , equipped inside with an enthalpy tunnel for calculating the performance of internal split or fan coil units up to $Q=1,500$ m³/h, built to AMCA 210 specifications (**fig. a**).

>> A fan test tunnel, according to ISO 5801 and UNI 10531, for checking the air flow-rate values of axial-flow and tangential fans and monitoring of the flow-rate/head curve of centrifugal fans for values up to $Q=5000$ m³ (**fig. a**).

>> A semi anechoic chamber **C3** for sound power and pressure tests reconditioned for carrying out the tests at temperatures stipulated by Eurovent conditions. The chamber is suitable for units up to $P=50$ kW and therefore for the whole range of terminal units and chillers up to the powers conditions;

>> All the chambers allow our technicians to control cooling only or heat pump units, with heat recovery in the de-superheating phase or total heat recovery and In addition process units for leaving water temperature down to -8°C .



fig. a



fig. d



The Ferrol logo is positioned at the top center of the page, above the main image. It consists of the word "ferroli" in a bold, black, sans-serif font, with a stylized orange and black arc above the letters "o" and "l".A larger version of the Ferrol logo is located in the upper right quadrant of the page. It features the same "ferroli" text and stylized arc as the smaller logo above.

The financial investment in R&D in recent years have enabled the production of systems that meet individual market demands needs in terms of performance (efficiency, quiet operation, reliability).

>> The most significant and largest financial investment is certainly the climatic chamber C5, which is one of the largest in Italy and able to test units for powers up to 1800 kW (fig. c-d). The total internal volume (approx. 1200 m³) is controlled by a system of water and re circulated air circuits with inverter control and a smart software system enabling testing without personnel for temperatures to -10°C, with the option of dividing the chamber into separate zones for testing two units at the same time under different conditions.

>> The steam for test some unit is produced by a boiler at low pressure, specially designed by the industrial heating division technical department.

The image shows the interior of a large industrial climatic chamber. A person in a white lab coat is standing next to a large piece of equipment. The chamber has a green floor and white walls with various pipes and cables. A "Ferrol" logo is visible on the top wall.

fig. b

The image shows the exterior of the climatic chamber. It is a large, white, rectangular structure with a blue door. A control room with glass windows is visible on the left side. A "Ferrol" logo is on the blue door.

fig. c



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Italy references

HOSPITAL AUTHORITIES

Milazzo (ME)

RHA + RGA + UTA

Piemonte (ME)

RLA + FAN COIL

S. Filippo Neri Roma

RMA + FAN COIL

Militare Celio (RM)

UTA + FAN COIL

Opera Pia (VB)

RMA + FAN COIL

Cotugno (NA)

RGA + UTA + FAN COIL

Vecchio Palmanova (UD)

FAN COIL

V. Emanuele Gela (RG)

RHA + UTA

Borgosesia (VC)

RHV + UTA

Misericordia (GR)

FAN COIL

Silvestrini (PG)

FAN COIL

Villa San Pietro (RM)

UTA

San Bonifacio (VR)

UTA

C. Poma (MN)

FAN COIL

Monaldi (NA)

RLA + UTA

Sarcone (BA)

RGA

S. Anna (CO)

UTA

Belcolle (VT)

UTA

Maggiore (BO)

UTA

S.Martino (GE)

RGA

Barcellona (ME)

UTA

G. Rummo (BN)

RGA

Cà Foncello (TV)

UTA

S. Maria della Circe (SI)

UTA

Vittorio Emanuele III (CL)

UTA

Vincenzo dell'Erba (BA)

RMA + UTA

Santhià (TO)

RLA + FCF

Borgomanero

RHA + UTA

Bambin Gesù Roma

UTA + FANCOIL

Sandro Pertini (RM)

RGA + FAN COIL

Manduria (TA)

RXA + RMA + FAN COIL +

TERMOVENTILANTI

Moscato (TA)

RXA + TERMOVENTILANTI

S. Vito al Tagliamento (UD)

UTA + TERMOVENTILANTI

Niguarda (MI)

TERMOVENTILANTI

Maggiore della Carità (NO)

UTA + RLA + RGA

Gubbio (PG)

RGA + FAN COIL

Presidio Ospedaliero

ASL

n. 4 APICELLA (NA)

RGA

Azienda Ospedaliera Senese (SI)

RXA

Policlinico di Monza (MI)

RGA

USL 4 di Prato (PO)

CENTRALI TRATTAMENTO ARIA + RGA

+ VENTILCONVETTORI

USL 13 (BA)

CENTRALI TRATTAMENTO ARIA

ASL NAPOLI 2 (NA)

CENTRALI TRATTAMENTO ARIA

ASL di Frosinone (FR)

RLA + CENTRALI TRATTAMENTO ARIA

Casa di Cura Columbus (MI)

CENTRALI TRATTAMENTO ARIA

Istituto Zooprofilattico (SS)

RLA + RHA

Regione Lazio (RM)

CENTRALI TRATTAMENTO ARIA

Clinica Villa Sandra (RM)

CENTRALI TRATTAMENTO ARIA

Casa di Cura S. Lorenzino (FC)

RGA

Laboratorio TUV Scarmagno (TO)

RGA + FCS

I.P.A.B. Ist. Giovanni XXIII (BO)

RHA + CENTRALI TRATTAMENTO ARIA

Centro Sterilizzazione "Steril Piemonte" (VC)

RHV + RLA + CENTRALI

TRATTAMENTO ARIA Ingegneria Biomedica S. Lucia (NO)

TRATTAMENTO ARIA

RGA + VENTILCONVETTORI



San Bonifacio hospital (VR)

> SCHOOLS,
UNIVERSITIES,
LIBRARIES

**Liceo Classico
S.M. Legnani (VA)**

RGA + AIR HANDLING UNIT

**Biblioteca di Palazzo Chigi
(RM)**

FAN COIL

**Biblioteca Com. Macomer
(SS)**

ROOF TOP RFA

**Biblioteca Com. Caserta
(CE)**

RLA

**Università Magna Grecia
(CZ)**

AIR HANDLING UNIT

IPSIA di Gallarate (VA)

AIR HANDLING UNIT

Università di Bari (BA)

RGA + AIR HANDLING UNIT

Università di Salerno (SA)

ROOF TOP RFA

Palazzo Reale (NA)

RGC

Politecnico di Bari

AIR HANDLING UNIT

Campus Universitario (PI)

AIR HANDLING UNIT + FAN COIL

> HOTEL

Hotel San Marco (VR)

AIR HANDLING UNIT

Hotel Mediterraneo (RG)

RLA

Hotel Baco da Seta (AQ)

RGA

Hotel Torricella (PG)

RGA

Hotel Tilibas (SS)

AIR HANDLING UNIT

Hotel Tiberio Palace (NA)

AIR HANDLING UNIT

Hotel Incanto (PI)

RGA

Hotel Hilton (MT)

UT REC + TCX

Residence "La Giurlita" (LE)

RMA + FCF + TCX

> CATERING

Ristorante "Mare Rosso" (MI)

HSW

Cantine le Cionce (GR)

RLA

Cantina Zaccagnini (PE)

ROOF TOP

Castello di Radda (SI)

AIR HANDLING UNIT

Ristorante Santo Spirito (SA)

RLA + AIR HANDLING UNIT

**Villaggio turistico Casalvelino
(SA)**

RLA + FAN COIL

**Best Western Soave Hotel
(VR)**

RLA + FAN COIL + UT REC



tiberio palace, hotel & conference center NAPOLI



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Italy references

> BANKS

Monte dei Paschi di Siena
AIR HANDLING UNIT + DUCTED FAN COIL

CMP - Poste Italiane (PG)
RLA + RGA + RMA

Poste Italiane CMP (AN)
UT REC

Poste Italiane (RM)
AIR HANDLING UNIT

Banca Finconsumo
RSA + RPC + FAN COIL

Banca d'Italia (BS)
RXA

> OFFICES

Regione Puglia (LE)
RGA

Telecom S.P.A. (AQ)
FAN COIL

Telecom S.p.A. (RM)
FAN COIL

Pirelli R.E. (TO)
RVW

Olivetti Multiservices SpA (TO)
AIR HANDLING UNIT

Sede Municipale S. Teresa di Riva (ME)
RGA

Direzione compartimentale Ferrovie Italiane (AN)
FCF + FCS

Fiat Group - Ingest Facility (TO)
RGA + RLA + AIR HANDLING UNIT

Autostrade italiane Direzione tronco 2 (MI)
AIR HANDLING UNIT

> SALES OUTLETS

Luisa Spagnoli S.P.A. (PG)
POLAR

LIDL Cairo Montenotte (SV)
RGA

Carrefour (NO)
RLA

Brico Center (PV)
ROOF TOP

Carrefour (CE)
TCX + FAN COIL

Concessionaria AUDI (VC)
RGA

Concessionaria AUDI (NO)
RLA

Calise Centrum (FC)
RLA + AIR HANDLING UNIT + DUCTED FAN COIL + VEC



> MILITARY SECTOR

**Caserma Guardia di Finanza
"Cefalonia Corfù" (PG)**

FCF

**Scuola di Polizia Ministero
Infrastrutture (RM)**

RFA + RMA + RGA + RLA

Esercito Italiano (RM)

CARRELLABILI

**Comando Guardia
di Finanza (TP)**

RLA

Caserma U. Polonio (GO)

RGA + FAN COIL + AIR HANDLING UNIT

**Caserma Guardia di Finanza
(RA)**

RGA + FCS

Arsenale di Taranto (TA)

RHA + FAN COIL + AIR HANDLING UNIT

**Scuola Militare di Cavalleria
(TO)**

AIR HANDLING UNIT

**Caserma Carabinieri
S. Bonifacio (VR)**

RGA + RMA

> LARGE AREAS

Centro Congressi (AR)

AIR HANDLING UNIT + RLA + RGA

**Museo delle Scienze Naturali
(BN)**

RGA + FAN COIL

**Piscina Intercomunale
Fucecchio (FI)**

AIR HANDLING UNIT

Museo Etnografico

Caravel (AO)

RGA + AIR HANDLING UNIT

Museo Comunale (RN)

RLA + AIR HANDLING UNIT

Centro Comm.le Ortuso (RC)

AIR HANDLING UNIT

**Centro Comm.le Corolla
(ME)**

AIR HANDLING UNIT

De Martini Shipping (GE)

AIR HANDLING UNIT

Teatro San Carlo (NA)

AIR HANDLING UNIT

Teatro Diana (SA)

RLA

Mercato Tartini (BO)

AIR HANDLING UNIT

Multisala Impero (VA)

ROOF TOP

Sala Bingo di Gallipoli (LE)

ROOF TOP RFA

Palazzo INAIL (VC)

RGA

EUROMA (RM)

RHV

Auditorium di Mantova (MN)

RGA + AIR HANDLING UNIT

Conservatorio Musicale (SA)

RMA + FCS

Centro Natatorio (MN)

RLA + AIR HANDLING UNIT

CUS Campo Hockey (PI)

AIR HANDLING UNIT

Palacilento (SA)

RHA + AIR HANDLING UNIT



Palacilento - SALERNO



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Italy references

> INDUSTRIES

Stabilimento Versace S.P.A. (NO)

RHA

Stab. Artema S.P.A. Zegna (BI)

RGA

Stabilimento AIA (VR)

RHA

Gruppo Fendi S.P.A. (MI)

AIR HANDLING UNIT

Stab. Doimo City Line (TV)

RLA

Stabilimento LIOLÀ Spa (NO)

RGA

Stab. TYCO VALVES (PC)

RGA

Riseria Stroppiana (VC)

RLA

Finmeccanica (RM)

RGA+

Stabilimento Ferrero (CN)

AIR HANDLING UNIT + RLA

Concerie Settebello (PI)

RHA + RGA

Stabilimento Unoaerre (AR)

RHV + AIR HANDLING UNIT

Stabilimento Ericsson (NA)

AIR HANDLING UNIT + FAN COIL

Stabilimento Ansaldo (TO)

RGA + AIR HANDLING UNIT + FAN COIL

Cantiere S. Paolo (BA)

RGA + FAN COIL + UT REC

Stab. Missano S.p.A. (SA)

RLA + RGA + AIR HANDLING UNIT

> AIRPORTS

Militare Base Nato (BR)

RLA

Fiumicino L. da Vinci (RM)


AIR HANDLING UNIT

Militare "F. Baracca" (RM)

RGA

Militare Pratica di Mare (RM)

RLA + AIR HANDLING UNIT + FAN COIL

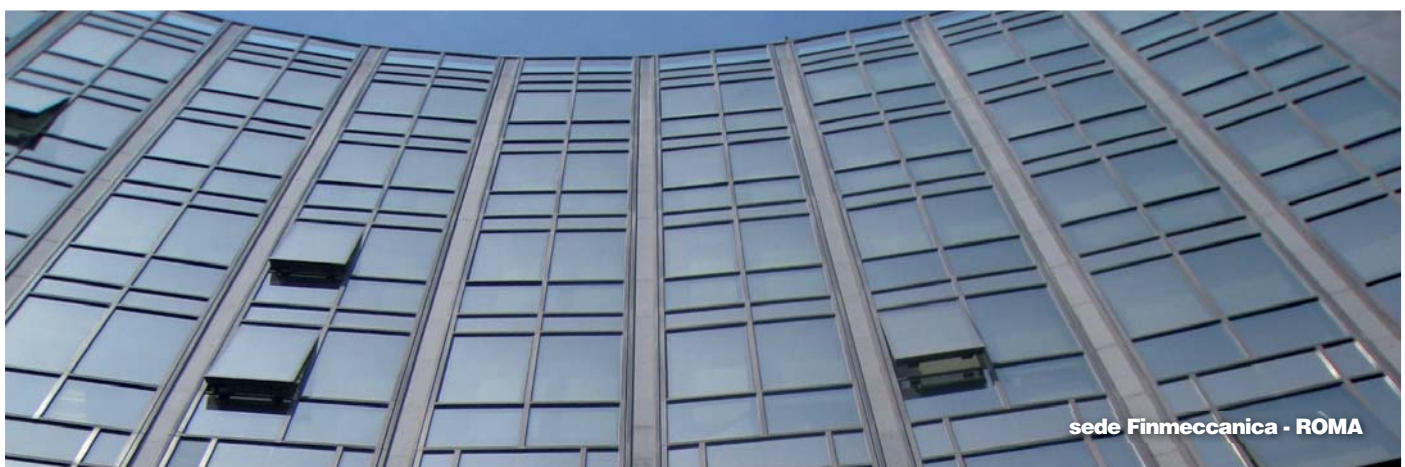

> Ferrolì's Great Britain references

Cherry Pipes

Plastic pipe company process application - Ireland

RHA

London Gallery

Art gallery commercial cooling application - London

RHV

Spectrum Centre

Shankhill Road office cooling - Belfast Ireland

RGA

Sussex Farm process cooling - England

RHV





>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferrolli's Great Britain references

Royal Theatre - London

RLA

Harrogate International Conference Centre - London


RLA

Crowne Plaza Hotel - Colchester - England

RLA + TOP FAN



Crowne Plaza Hotel - Colchester - England

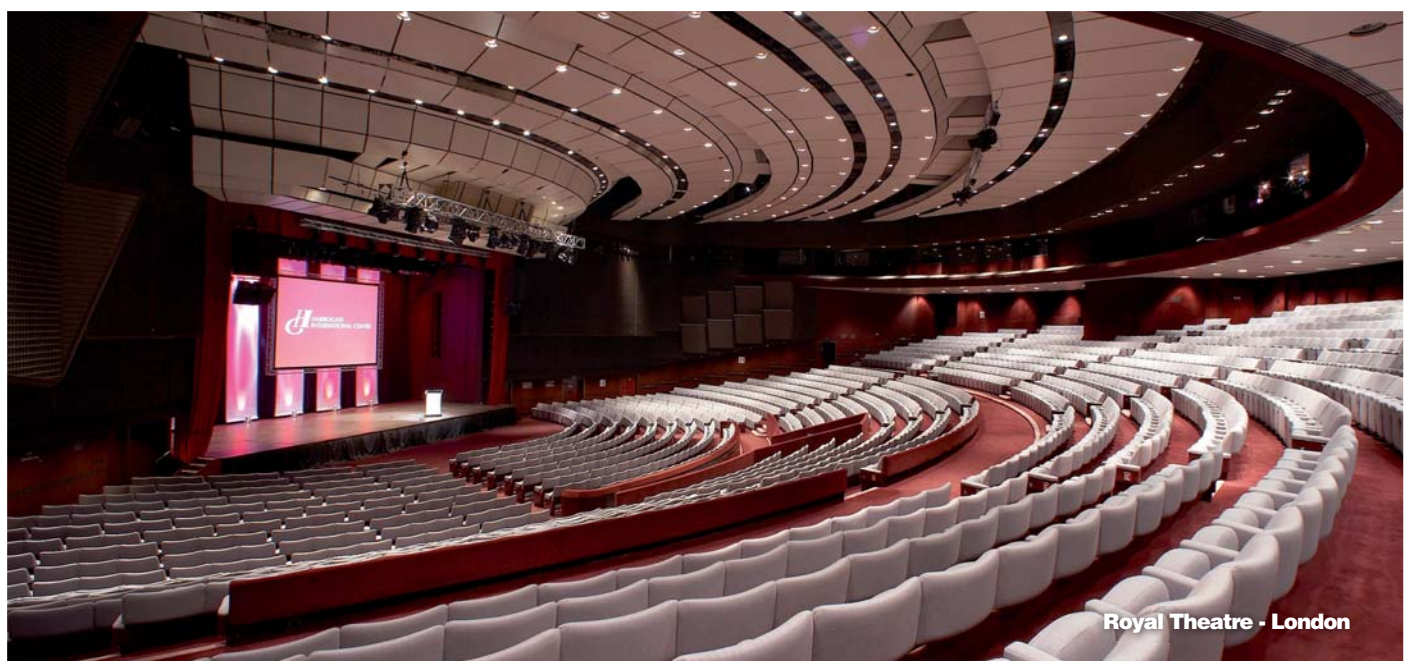

Royal Theatre - London

> Ferrolí's Spain references

SPAIN - ESPAÑA

Hospital de Alta Resolución de Loja

Hospital de Sagrado Corazón

Hospital Meixorio de Vigo

Hospital de Enfermedades Raras

Hospital Benito Menni

Hospital Xanit

Centro Salud Manzanares

Clinica Cefer

Rehabilitación oficinas

Mercado Municipal

Museo de Calahorra

Colegio Corazonistas

Edificio Presidencia de la Generalitat

Edificio banco España

Polideportivo Parque Coimbra

Polideportivo Siec

Facultad de Derecho

Centro Cultural Bembrive

Edificio Banco Espana

Ayuntamiento

Complejo Hotelero Terralta

Hotel Carlton

Hotel Fuente Las Piedras

Hotel San francisco

Hotel El Espinar

Hotel Acosta

Hotel Parador

Hotel Villa de Benavente

Hotel Meridional

Hotel Benidorm

Hotel Balneario de Orio

Hotel Abando

Juzgados de Olot



Los Pilares del Estado Gijón (Spagna)



Hotels CARLTON Bilbao (Spagna)



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Romania references

RSI Electro Office Building - Bucuresti

RGA

Office Building Vitan - Bucuresti

RLA

Office Building Pipera

Hotel Floreasca - Bucuresti

RGA

Hotel Rodna - Bistrita

RGA

Hotel Maxim - Oradea

RGA

Ness Service - Dvd Factory

Sediu Galmopan - Galati

RGA

Sediu Arabesque - Brasov

RGA

Moticica Grup - Timisoara

RGA

MMM Automotive - Turda

RGA

Climatherm Center - Iasi

RGA

Frigoglass Romania - Timisoara

RLA

Teo Center - Brasov

RLA

Amma Print - Bucuresti

AIR HANDLING UNIT + RHA

RH Printing - Bucuresti

RHA

Reamedia - Bucuresti

RHV

Delphi Romania - Ineu

AIR HANDLING UNIT

Club Office - Sighisoara

AIR HANDLING UNIT

Cazino - Sighisoara

AIR HANDLING UNIT

Aeroport - Sibiu

AIR HANDLING UNIT + RHA

ODS Business Service - DVD – Bucuresti

AIR HANDLING UNIT

Manoil Mall - Galati

AIR HANDLING UNIT

Bazin Olimpic - Resita

AIR HANDLING UNIT

Sala Sporturilor - Onesti

AIR HANDLING UNIT

Stabilus - Brasov

RLA



Stella Building / Jules Verne - Bucuresti

RLA

Sempo S A - Bucuresti

RLA

Loial - Sibiu

AIR HANDLING UNIT

MAGAZINE DEDEMAN 2010

Craiova RFA

Brasov RFA

Arad RFA

Timisoara RFA

Resita RFA

Cluj Napoca RFA

Sediu birouri Dedeman- Bacau

VN + AIR HANDLING UNITS + RHV + TCX

MALL Cetatea Noua- Oradea

MERCURY SP + AIR HANDLING UNITS + RHA + RHV + EOLO

Consiliul Judetean - Sibiu

VM-B + FCS

Depozit EVW Gilau- Cluj

RGA + VM-F

MALL - Tr Severin

RHV + AIR HANDLING UNITS

Sediu GENPACT ROMANIA - Bucuresti

RLA + AIR handling units

Clinica Regina Maria - Bucuresti

RGA

Club Euphoria - Cluj

RMA + AIR handling units

Banca Transilvania Baritiu - Cluj

RGA + TOP FAN + FCS+ AIR handling unit

Banca Millenium - Cluj

FCS

Banca Transilvania - Cluj

FCS



Banca Transilvania - Cluj (Romania)



Club Euphoria - Cluj (Romania)



Banca Transilvania Baritiu - Cluj (Romania)



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Czech Republic references

Hotel Celnice Břeclav

RXA + TOP-FAN

MERLIN PLUS Břeclav, stock of oil and offices

TOP-FAN

MORAVINO Valtice, winegrowing

RXA

NOVE VINARSTVI Drnholec, winegrowing

RXA + TOP-FAN

Vila Antonia, prestige offices Ostrava

RGA

Mikro Trading Podivin, logistic and stocking centre of toys

RXA + TOP-FAN



Hotel Celnice Břeclav



Merlin Plus Břeclav



Moravino Valtice



Nove Vinarstvi Drnholec

> Ferrolli's Russia & Republic of Belarus references

> RUSSIA РОССИЯ

Commercial Center "ARMADA" Moscow,
RHV + VHF3

"Kuba Commercial Center" Chelabinsk,
RHV + FCS

Medical Center of Tamogrphics Chelabinsk,
RGA + FCS + TOP FAN

Commercial center" Moscow prospect",
RGA + TOP FAN VB-M + VHF3, RHV

"SBER-BANK Russia" Moscow office.
Moscow,
RGA + CMA + TOP FAN

Bank "URASLIV" Moscow, Russia
RGA

Factory of Technical line production
Frazevo,
RGA

JEWELLER Department store Krasnodar,
RGA + TOP FAN

"Kvaevitskiy Museum" Krasnodar,
RGA + TOP FAN

"Medical center branch" Moscow,
RGA + FCP

Business Hotel - Krassnodar,
RGA + RLA

"Historical - Archeological
Museum-Felizina"
FCS

> THE REPUBLIC OF BELARUS РЕСПУБЛИКА БЕЛАРУСЬ

The Skating Ring "Ice Palace" Baranovichi,

Republican theoretical and practical Center
"Mother and Child" Minsk,

9-th municipal clinical hospital Minsk,

Research and Production Corporation
"Integral" Minsk,

Business Center "BME BUSINESS CENTER"
Minsk,

Republican theoretical and practical Center
of oncology and medical radiology Minsk,


BMW offices and service center Minsk,

Business Center "Europe" Minsk,

Unitary enterprise "Mucipal Bathhouses"
Minsk,

BELMICROSYSTEMS RESEACH & DESIGN
CENTER Minsk,

Organizations of the NASB Department of
Chemical and Earth Sciences Minsk,

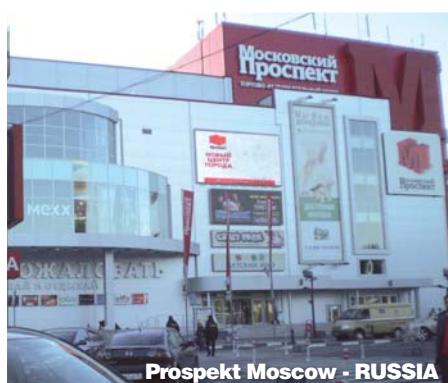



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Turkey references

Turkmenistan Projeleri - Turkmenistan,

RHV + RGA + RLA + RHA + FAN COIL + RFA

Aksoy plaza - Izmir,

RLA + TCX

Ticaret Odasi - Kocaeli,

RGA

EAGLE Burgmann - Kocaeli,

RXA + RMA

BS Press - Izmit,

RHV + TOP FAN

Tekirdag Trade Center - Tekirdag,

FCS + TCX

Tekirdag Accounting center - Tekirdag,

RMA + FCS

Işviçre Hospital - Istanbul,

RGA + TOP FAN

Lady Diana Hotel - Istanbul,

RHA + TOP FAN + UT REC DP F

Aslan Hotel - Küthya

RGA + AHU

Panorama Otelcilik - Kayseri

RHA

Eyüpoğlu Hotel - Istanbul,

RGA

Lidersan - Gaziantep,

RFA

Cemdag Plastik - Izmir,

RHA

Plasko Plastik - Tekirda

RLA + RGA + TCX

Yildiz Plastik - Istanbul,

RGA

Cemdağ Aydınlatma Plastik - Izmir,

RHA

Özmek Plastik - Istanbul,

RGA

Önder Plastik - Gebze

RXA + RGA

AUDI Showroom - Gaziantep,

RGA + FAN COIL

Mitsubishi Servis & Showroom - Istanbul,

RGA

Namlıoğlu Restaurant - Istanbul,

RGA

Sultançiftliği Aışveriş Merkezi - Istanbul,

RGA + RHA

Izmit Skoda Plaza - Kocaeli,

RGA + FAN COIL

Mitsubishi Servis & Showroom - Istanbul,

RGA

Van Hastanesi - Van,

RGA

Yasam Hastanesi

RLA + TOP FAN + FCS

Kazakistan AVM

RHA + TOP FAN

Dokuz Eylül Üniversitesi Hastane - Izmir,

RGA

Ege Üniversitesi Ziraat Fakül

RMA

Izmit Ticaret Odasi - Izmit,

RHA

Metal Dizayn Tesisleri - Istanbul,

RLA

Izmit Karşıyaka Kültür Merkezi - Kocaeli,

RHA

Uğur Teneke Tesisleri Aydınlat - Kocaeli,

RHA + RLA + RMA



Lady Diana Hotel



Projeleri (Türkmenistan)



Projeleri (Türkmenistan)

> Ferrol's Poland references

> INDUSTRIES

**Budynki Biurowe BLACHOTRAPEZ
Warszawa - Sękocin**

RMA

Budynek biurowy ARCUS Gliwice

CMA + FCP and TOP FAN

**Budynki Biurowe METALKOP Młyny k
Buska Zdroju**

CMA + FCS

Budynki Biurowe POLYNT - Niepołomice

RMA + TOP FAN

Budynki biurowe STACO - Niepołomice

RMA + TOP FAN

Budynek Biurowy ASSECO - Rzeszów

RGA + FCP

**Linia technologiczna w Zakładach Produkcji
Grzejników Stalowych BRUGMANN
Legnicy**

RGA

Budynek Biurowy PANTEON - Bytom

CMA + FCP + UT-REC

Budynki Biurowe GTM - Mysłowice

RXA + TOP FAN + UT-REC

Wylęgarnia Drobiu - Sierpc

CMA

Budynek Biurowy SOLAR-BIN - Rzeszów

RGA + TOP FAN + TCX

FIAT AUTO POLAND Bielsko - Biała

RLA

Drukarnia CGS - Poznań

RGA + roof-top RFA + TOP FAN + FCS + UT-REC + FCS



Biura (uffici/office) Inżynierska Łódź

> HOTELE RESTAURACJ

Hotel ADAM - Szczyrk

FCS

**Restauracja z hotelem Karczma Górska” -
Wałbrzych**

CMA + TOP FAN

Dworek Kościuszko - Krakow

RMA + TOP FAN

> SZKOLY

**Sala Sportowa przy Szkole Podstawowej w
Porębie k - Zawiercia**

rooftop RFA

**Państwowa Szkoła Wyższa
Zawodowa w - Krośno**

CMA + FCS

**Magistrat Urzędu Miasta i Gminy
Niepołomice**

RGA + RVL + TOP FAN + SOFFIO

> SZPITAL AL CENTRU M MEDYCZNE

Szpital Wojewódzki Bielsko - Biała

RLA

**Wojewódzka Stacja Weterynaryjna w
Legnicy**

RGA + TOP FAN

Medical Center SILESIA-MED. - Katowice

RGA + TOP FAN + FCS + UT-REC

Medical Center MEDICOR - Wrocław

RMA + FCP



FIAT AUTO POLAND Bielsko (Biała)



>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferrolli's Balkan references

> SRBIJA

Shopping center New Nork - Novi Sad

RLA + FCS + UT REC DP

Dedinje 3 objekta - Beograd

RXA + TOP FAN

> CROATIA

Mrksina - Zagreb

RGA + RMA + TOP FAN

Bulvanova - Zagreb

RMC + TOP FAN

Dugopolje - Split

RGA + TOP FAN

AUTO CENTAR ŠKODA - Zagreb

RGA + TOP FAN

AUTO CENTAR CITREN - Zagreb

RGA + TOP FAN

MOTEL ZIR, Auto put A1

RMA + TOP FAN

Zgrada Gradske Uprave Belišće

RGA + TOP FAN

Upravna zgrada Miagro d.o.o. Našice

RGA + TOP FAN

Vinkovci, regionalni prodajni centri - Bosso

RGA + TOP FAN

> BULGARIA

Kamchia resort

RHA + RLA + TOP FAN

> BIH

FC - franšizni centar - Vitez

RGA + TOP FAN + FCS

FIS - Vitez

RGA + TOP FAN

Pivovara Sarajevo - Sarajevo

RGA

Hotel Central - Vitez

TOP FAN + FCS

Hotel Tilija - Gračanica

TOP FAN + FCS

Airport Dubrave - Tuzla

WATER CHILLERS

Jafa-Jase factory - Špionica

WATER CHILLERS + FAN COIL

Interex Shopping centers CDEB

Sarajevo

WATER CHILLERS + FAN COIL + MERCURY

International building Kendi - Tuzla

TOP FAN

Trocal - Tuzla

TOP FAN

Hotel SAX - Vlašić

TOP FAN

MBI Development Malaysia Central Sarajevo

WATER CHILLERS + FAN COIL

Edo Slad ETNA - Gračanica

WATER CHILLERS + FAN COIL

BINGO d.o.o - Tuzla

WATER CHILLERS + FAN COIL + MERCURY

BINGO d.o.o - Brčko

WATER CHILLERS + FAN COIL + MERCURY

BINGO d.o.o - Gradačanica

WATER CHILLERS + FAN COIL + MERCURY

OMEGA d.o.o. - Tuzla

RLA + FAN COIL + MERCURY

Kopex Sarajlić - Sarajevo

WATER CHILLERS + FAN COIL



> Ferrol's Albania references

Drejtoria e policise - Tirane

RHA + TOP FAN

TEC - VLORE

RGA + FTP + TOP FAN

Center shqiptare

RLA + TOP FAN + TCX

Dieoqeza e rrethit mirdite

RGA + TOP FAN

American hospital - Tirana

RGA + TOP FAN + TCX + FTP

Drejtoria e policise - Durres

RGA + TOP FAN

Karburant - Alpet

RGA + TOP FAN

Bkt (banka kombetare tregetare) - Korçe

TOP FAN

Hotel Tomorri - Berat

RGA + TOP FAN

Reparti Ushtarak - Zallherr





>>> INDUSTRIAL AIR-CONDITIONING <<<

> Ferroli's Syria references

Ghandour Factory - Damascus

RHV

Matouk's office - Damascus

RGA ST + TOP FAN

Semiramis Hotel - Palmira

AHU + TOP FAN

Massa Plaza (Malki Mall) - Damascus

FCS

Kalde Factory - Damascus

RLA

Alkalamoon University Hospital - Deir Atiah

RLA + AIR Handling Units

Julia Dumna Palace - Aleppo

RGA + TOP FAN

Gandar Power Plant - Gandar

RGA + TOP FAN

Nestle Factory - Damascus

TOP FAN

Iraq Ambassador Resident - Damascus

RGA + TOP FAN

Almandine Hospital - Damascus



TOP FAN

Dr. Maatouk Villa Yaafour- Damascus

RGA + TOP FAN

Residential Projects- Damascus


TOP FAN

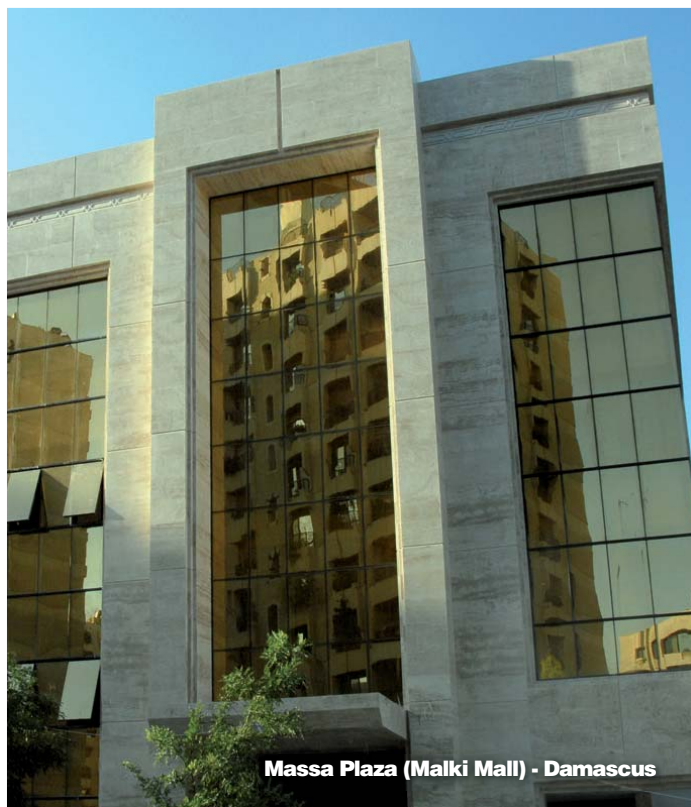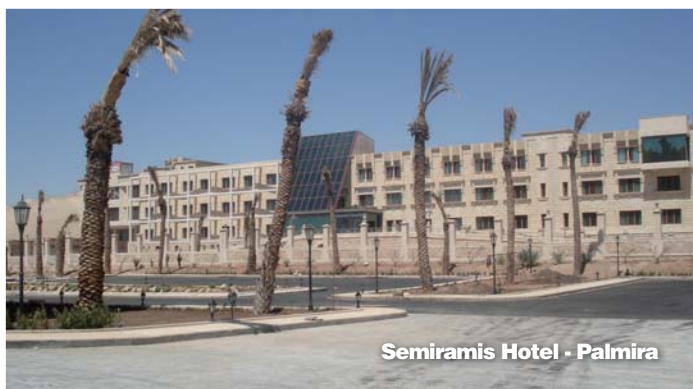




Product range


AIR COOLED WATER CHILLER WITH AXIAL FANS

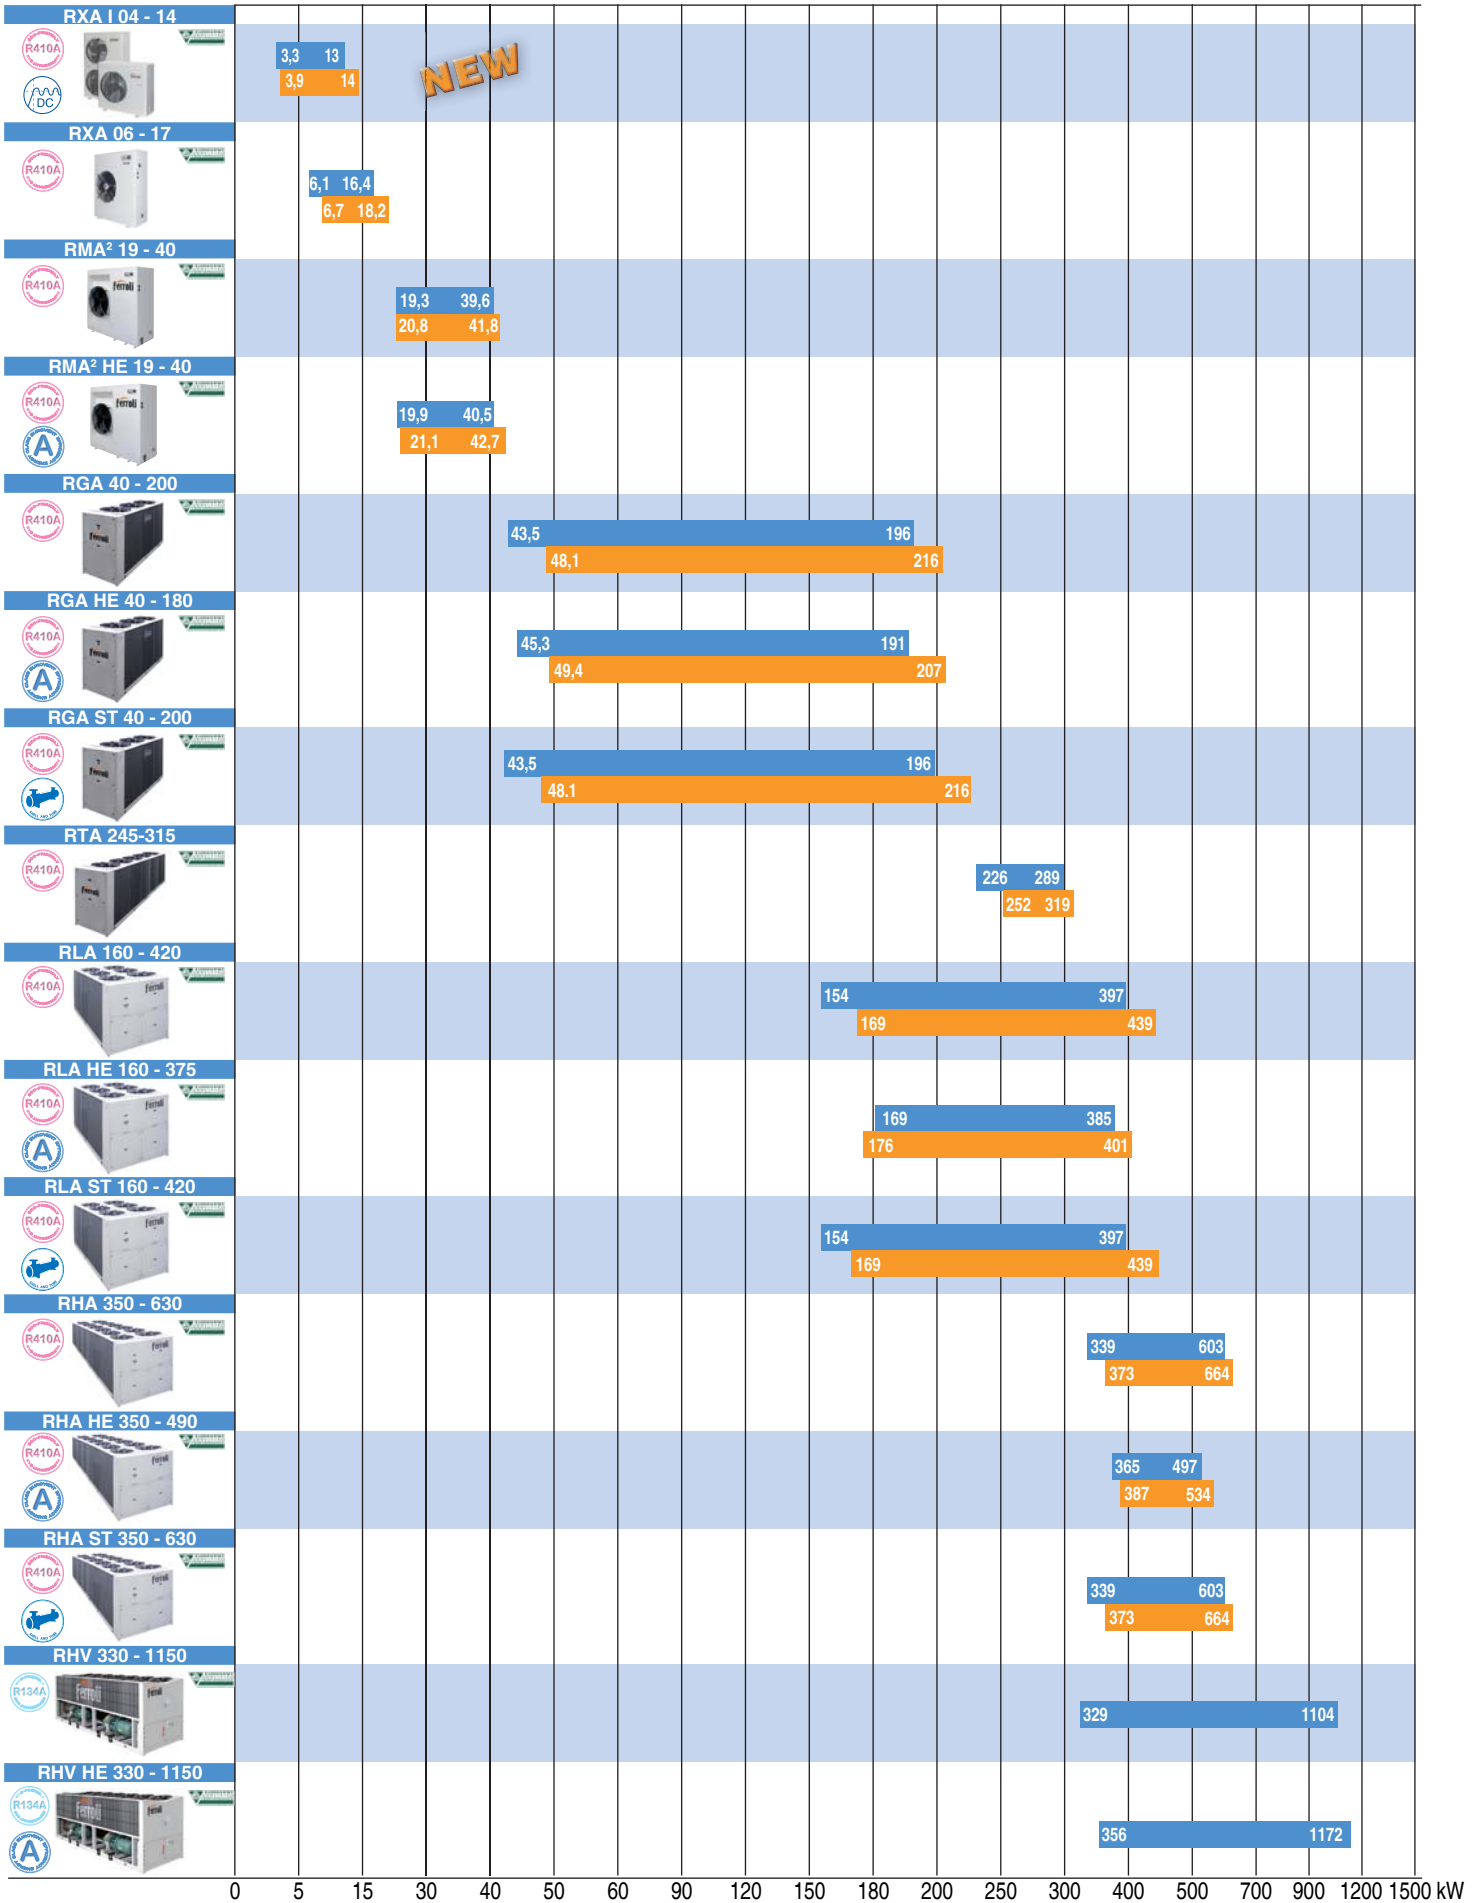


AIR COOLED WATER CHILLER WITH CENTRIFUGAL FANS

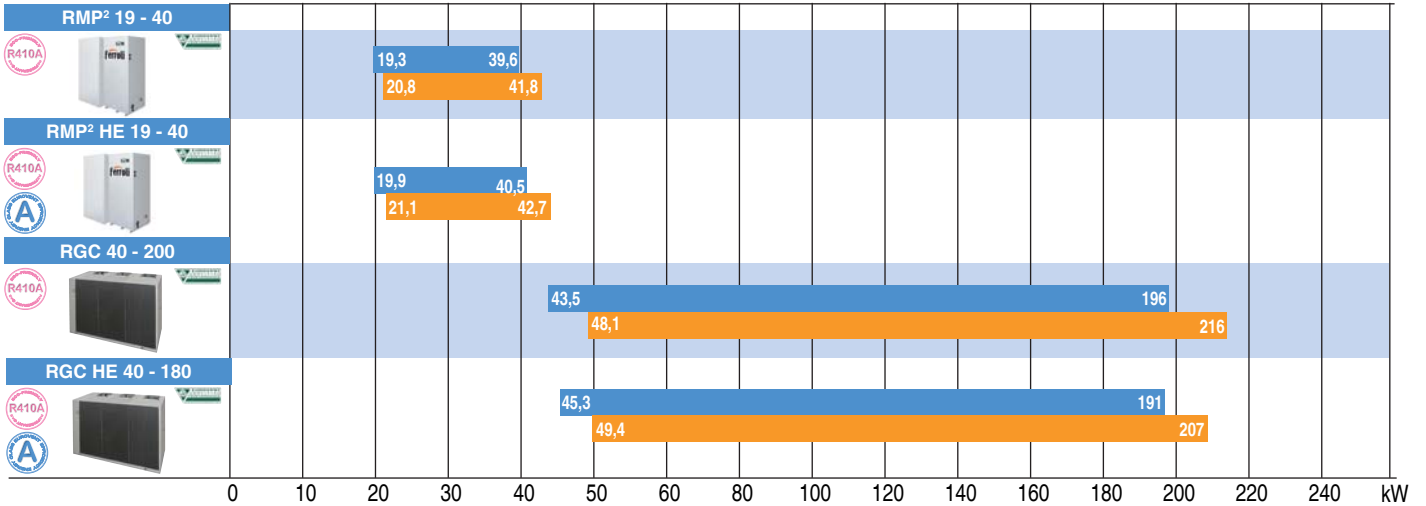


AIR COOLED WATER CHILLER FREECOOLING WITH AXIAL FANS

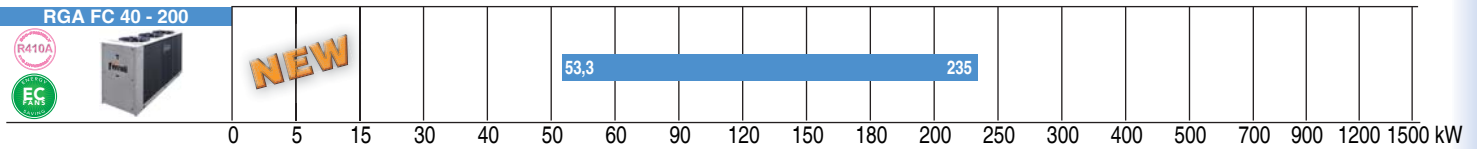

WATER COOLED WATER CHILLERS

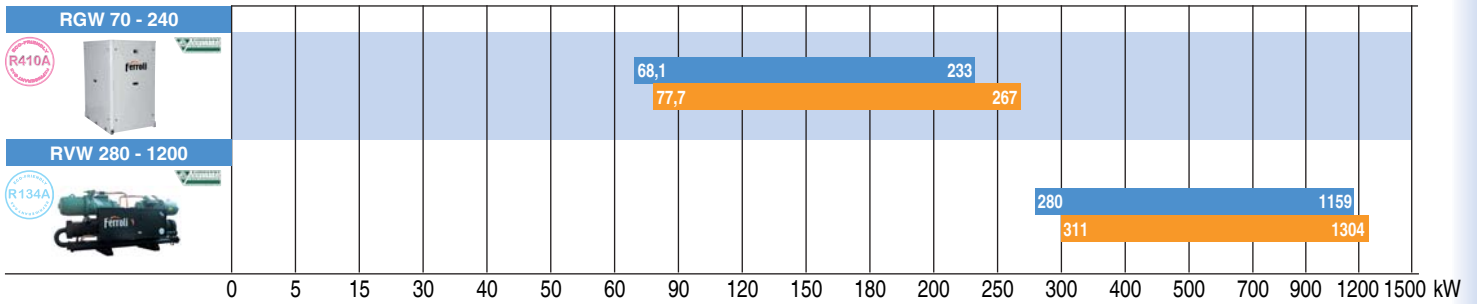


CONDENSERLESS UNITS FOR INDOOR INSTALLATION

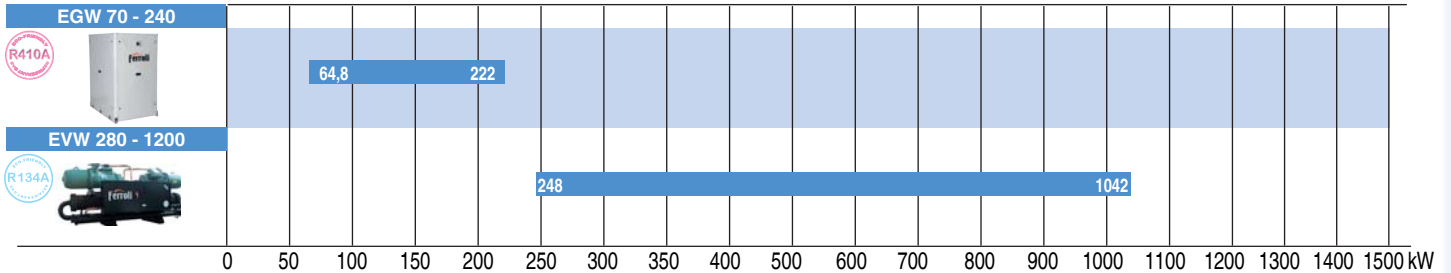


Product range


DIRECT EXPANSION CONDENSING UNITS

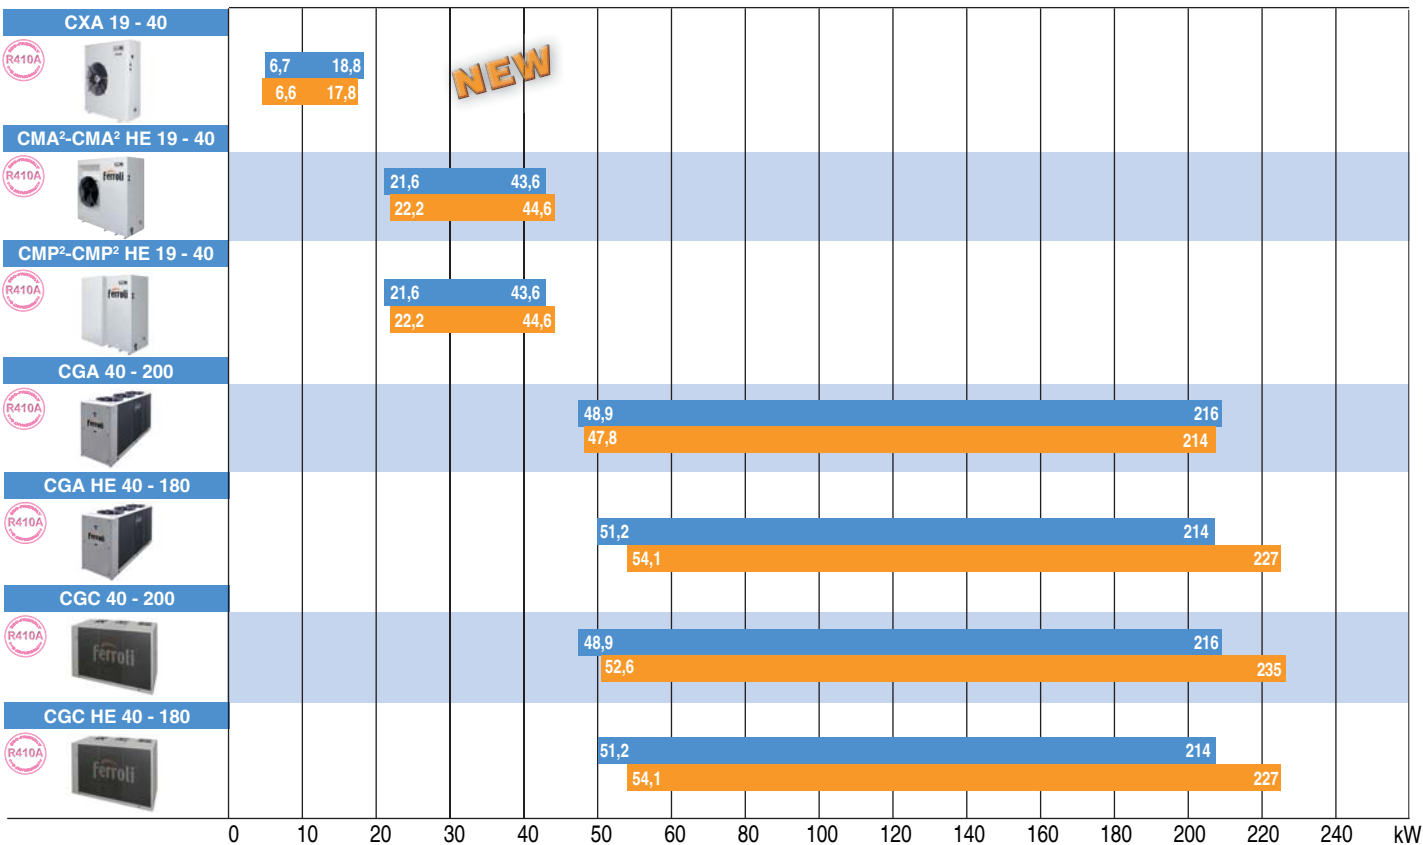


FAN COIL UNIT

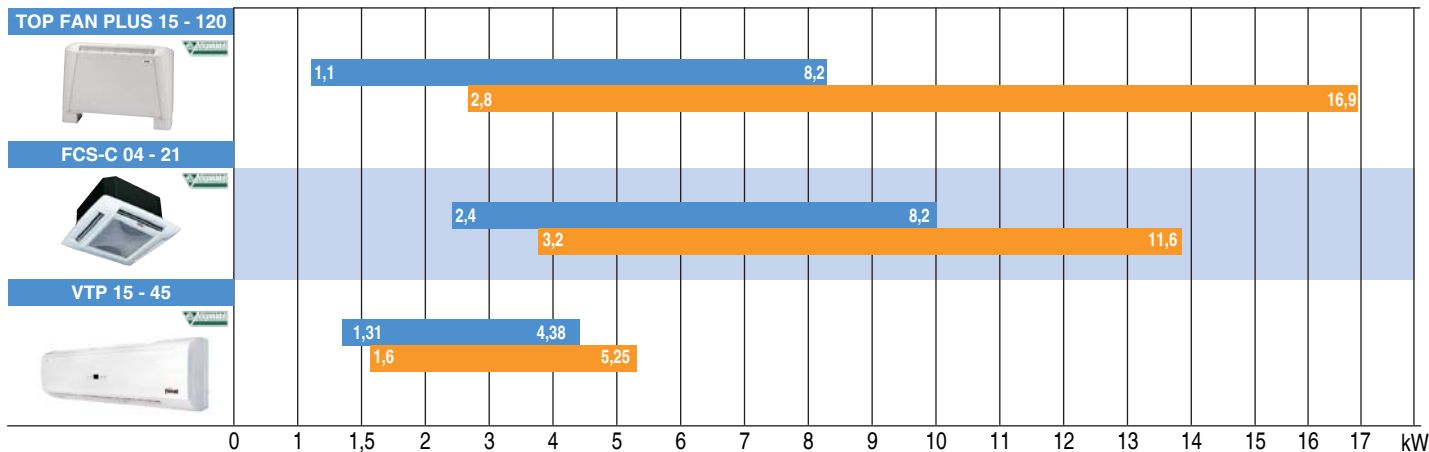


CEILING CONCEALED

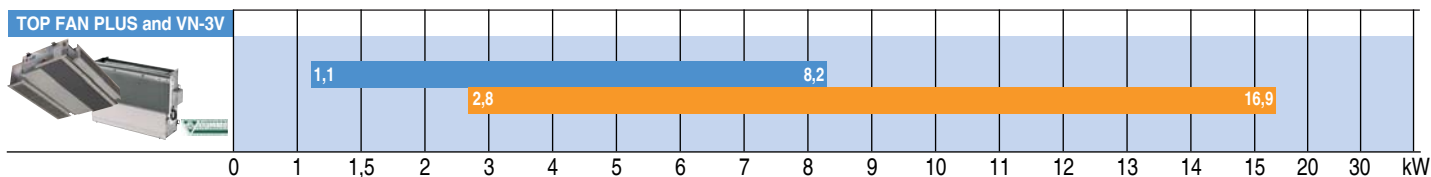


DUCTED FAN COIL

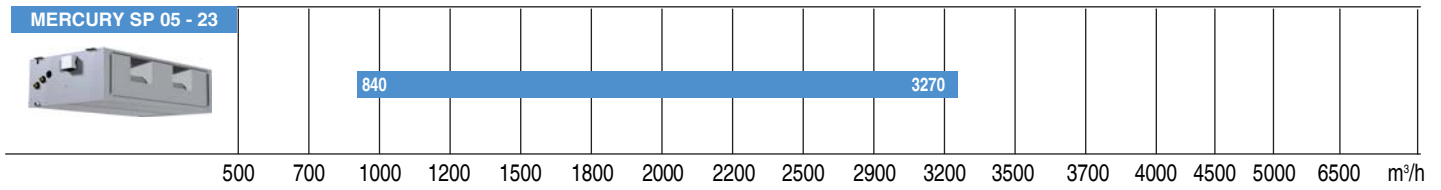


AIR HANDLING UNITS

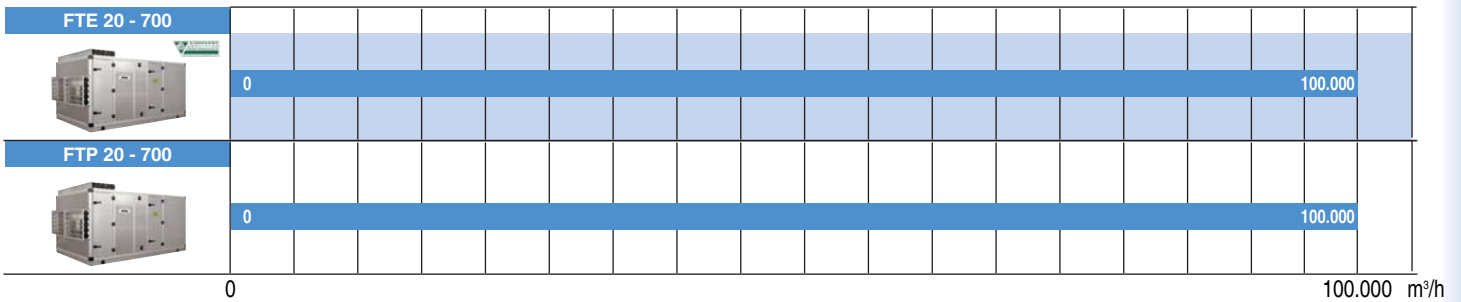

PACKAGED ROOF TOP AIR CONDITIONER

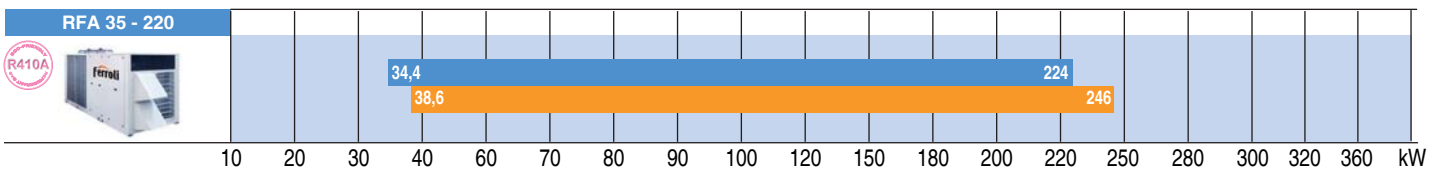

HEAT RECOVERY UNITS

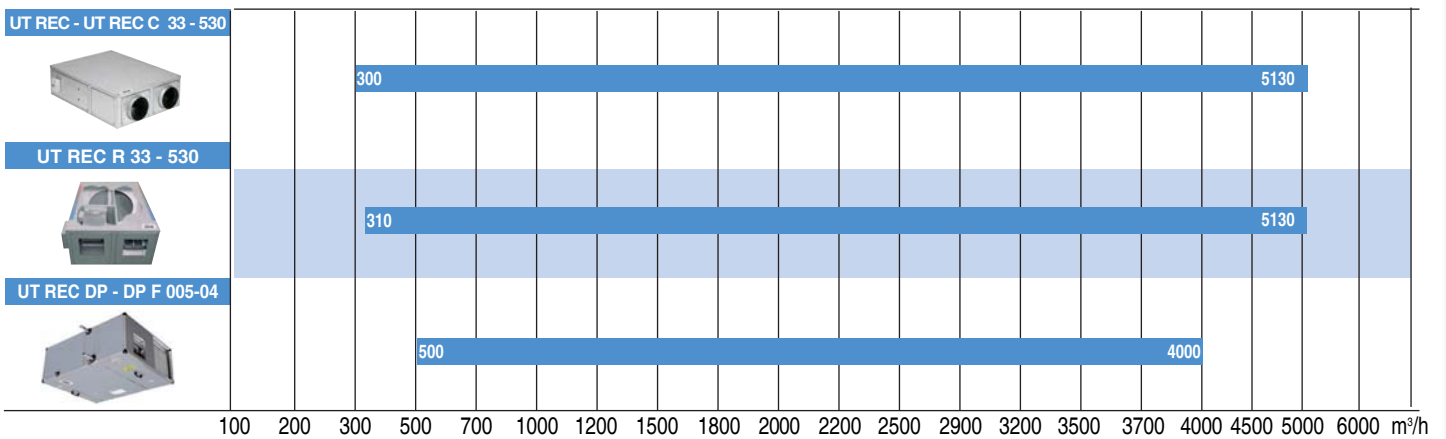

The list of certified products is available on the website www.eurovent-certification.com.

The Eurovent certification program LCP-HP shall apply to air cooled water chillers with nominal cooling capacity up to 600 kW and water cooled chillers with nominal cooling capacity up to 1500 kW.

> Main characteristics water chillers

TECHNICAL SOLUTION
NOISE CONFIGURATION
HYDRAULIC SYSTEM ON THE UNIT
SETTINGS FOR PUMPING MODULES SAFETY

> TECHNICAL SOLUTIONS

TYPE OF INSTALLATION

- I** for installation in hydronic systems
- B** for installation in hydronic systems with Brine solution (process application)

OPERATION

- R** chiller
- P** reversible chiller
- W** water side reversible chiller

VERSIONS

Basic Version VB

cooling only IR or heat pump IP

De-superheated Version VD

heat recovery only in de-superheating phases for cooling only units **IR** or heat pump units **IP**

Total Recovery Version VR

total heat recovery where all the thermal energy extracted by the fans is recovered by a condenser sized for the type of application

> SOUND CONFIGURATION

Basic Configuration AB

Low noise Configuration AS

Reduction in the number of fan speed with compressor insulation and a housing compartment with sound-absorbing material (fig. a).

Extra Low noise Configuration AX

A further reduction in the speed number due to larger exchangers.

New-concept fans with plastic blades and lower noise, in addition new **sound-absorbing materials** for covering the compressor and housing compartment has created a considerable noise reduction during operation (fig. b).





fig. a

> HYDRAULIC SYSTEM ON THE UNIT

The following accessories are available to allow the unit to be configured according to the system needs:

Storage Tank

Large capacity completely insulated and with air-vent, safety valves and drain.

Pumping module

- available with single pump or with backup pump,
- available **with variable-flow pump**;
- up to three levels of useful static pressure are available to adapt to any system design need,
- with a storage tank fitted, this allows configuration of the tank on the system delivery or primary circuit only.

Pumping-storage tank module

for installation next to the unit, the module is supplied complete with tank and pump or with twin pump version.

All the pumping accessories are complete with shut-off and safety valves, air vent, drain, expansion tank, one-way valves (only in case of twin pump), filter and pressure gauge for complete installation and easy service access (fig. c).



fig. b



fig. c

> SETTINGS FOR PUMPING MODULES SAFETY

The research and development of advanced electronics controls has enhanced the development of regulation logics. This ensures correct operation of the pumping systems. Therefore:

Unit with twin pump

The control system provides pump rotation to balance the hours of operation.

Unit with twin pump

If one pump shuts down, the second pump starts automatically and the UNIT CONTROL signals the fault.

Protection

If the unit remains on standby for long periods, the pump is started periodically to ensure correct and continuous operation.

Anti-freeze function

With the unit in standby, the setting starts the pump if the water probe detects a temperature below a certain threshold.

NB: please refer to each series solutions.



> Main characteristics water chillers

SETTING
EUROVENT
HIGH ESEER

> SETTING

Qualified Ferroli internal personnel have designed, developed and inspected the control logics for management of the unit, to ensure continuous operation and always with a view to energy-saving.

Settings for the technical use of the product are designed for residential, commercial or industrial units; refer to each unit the specific settings.

CLIMATE CONTROL FUNCTION (SLIDING TEMPERATURE)

(this function is only available in presence of outside air probe);
in the heating mode, the Set point is adjusted according to the climatic conditions, optimising operation.
It is also available in cooling mode, after modifying the regulator parameters,

DYNAMIC DEFROST

(this function is only available in presence of outside air probe);
with harsh outside temperatures, the efficiency of the system is optimised, avoiding unnecessary defrosts.

TIME PROGRAMMING

Modifies the Set point to adapt unit operation to energy-saving.

ECONOMY MODE

Modify the Set point to move the unit operation into energy saving mode.

DOUBLE SET POINT

In cooling or heat pump mode the Set Point can be changed to a second value controlled by keyboard.

ADVANCED TEMPERATURE CONTROL (ATC)

In cooling mode, with outside temperatures above the limits, ATC prevents unit shut down by modulating the compressor steps, keeping the system active to ensure its continuous operation.

DEMAND LIMIT

Enables capacity control of the unit's maximum power absorption.

HEATING INTEGRATIVE

In the heat pump mode a heat generator (a conventional or condensing boiler) can be activated, for integration.

NOISE CONTROL

For multi-circuit Extra low noise units (AX), one of the circuits is saturated to minimise fan noise. The control system provides for a regulation logic enabling this system to be Low noise as much as possible.


> EUROVENT

Ferroli is associated with formula **CERTIFY ALL**



Products and certification rules are present on the site:

www.eurovent-certification.com

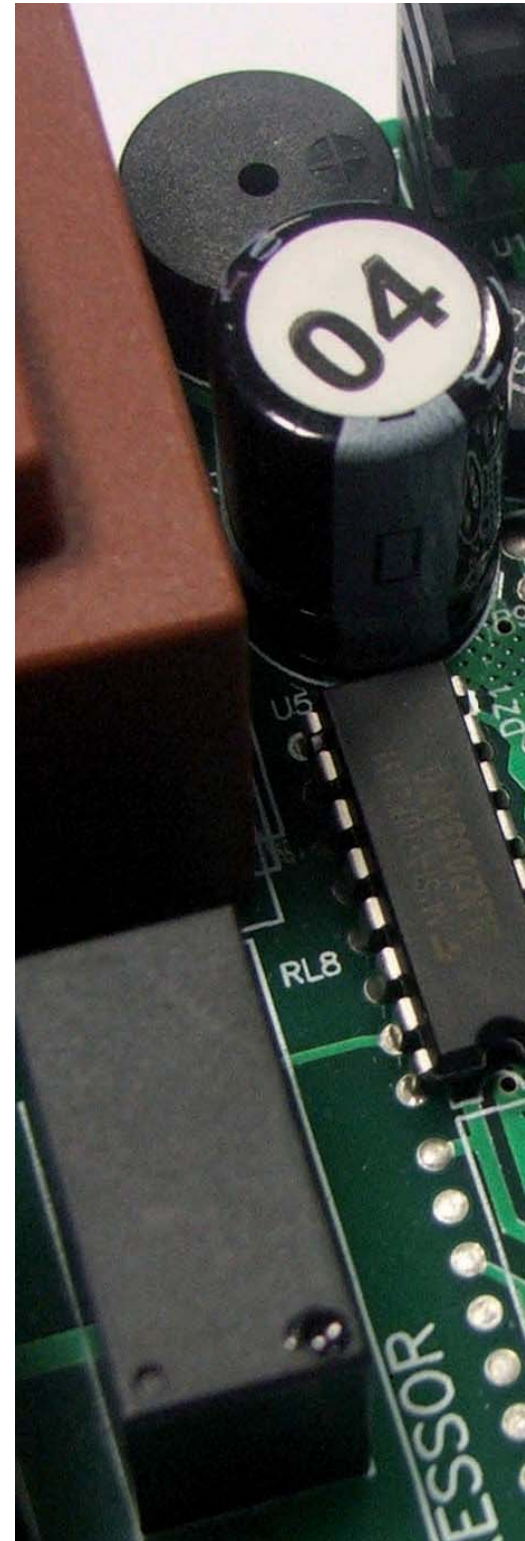



> HIGH ESEER

ESEER is calculated as follows:
$$\text{ESEER} = A \times \text{EER}100\% + B \times \text{EER}75\% + C \times \text{EER}50\% + D \times \text{EER}25\%$$

With the following weighting coefficients:

- A = 0,03 EER 100% amb. air 35°C
- B = 0,33 EER 75% amb. air 30°C
- C = 0,41 EER 50% amb. air 25°C
- D = 0,23 EER 25% amb. air 20°C

These coefficients indicate the significance and importance of the EER value according to the load and outside temperature.

Based on EUROVENT conditions, in a normal work cycle the units work at full load (35°C) for only 3% of the time.

A better capacity control of power delivered or absorbed at partial loads involves higher seasonal efficiencies.



Choice of unit should also take into account the ESEER value because it reflects the overall unit operation.

FERROLI follows this philosophy with Multiscroll solutions and Twin-screw compressors.

Single-circuit Double compressor units with multi stages have higher ESEER values than similar units Dual circuit type. For screw type double compressors units, the saturation of circuits occurs in parallel.

Everything converts into high efficiency at partial loads and therefore significant ESEER values are achieved.

NB: please refer to each series-specific adjustments.

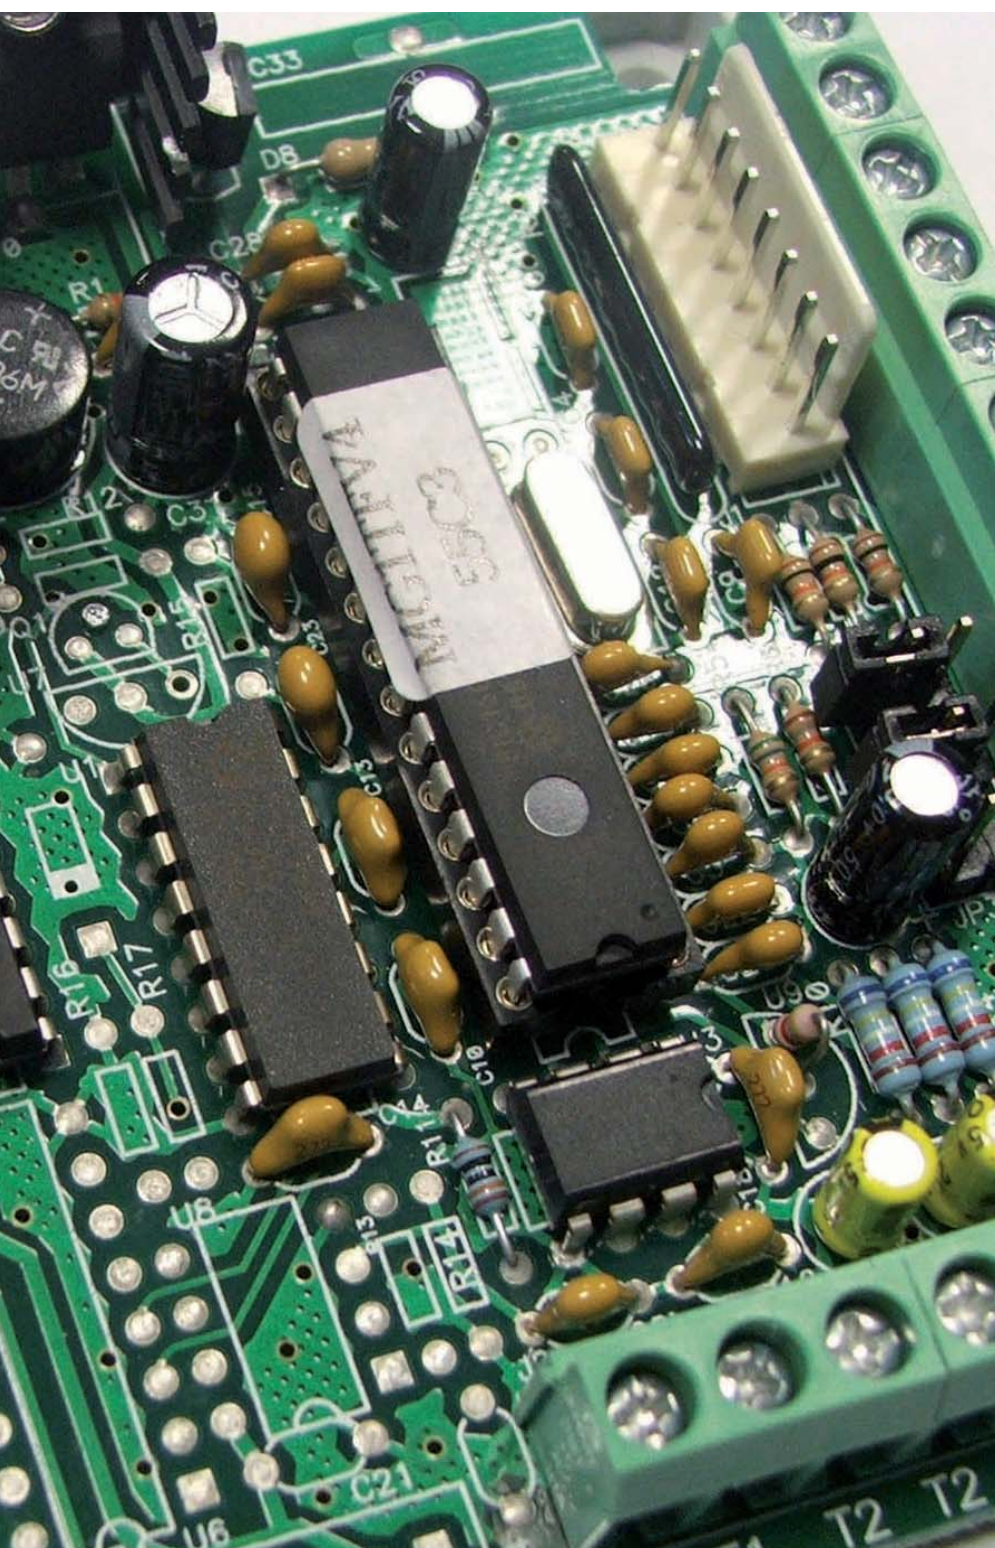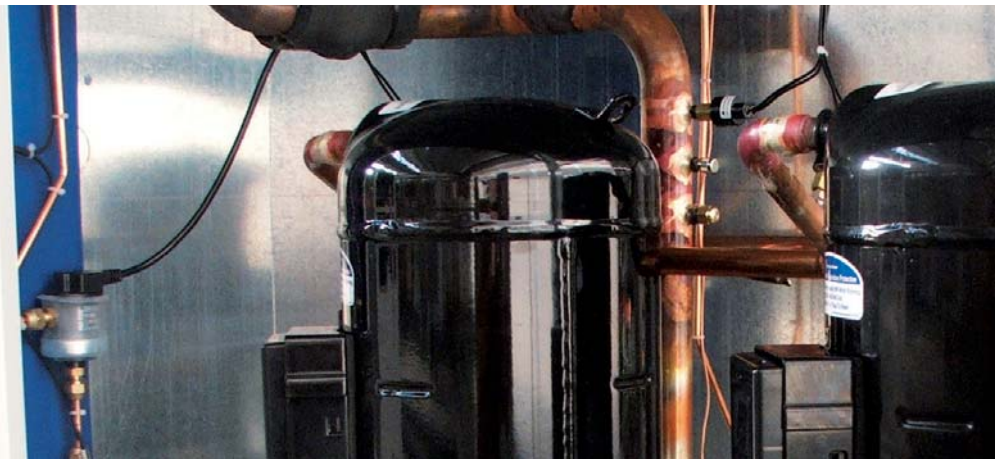

> Main characteristics water chillers

SAFETY

RELIABILITY

CAREFUL DETAILS

RESPECTING THE ENVIRONMENT

AQUASEL

> SAFETY

The units as standard are complete with:

- differential pressure switch on the plate-type exchanger,
- antifreeze heater on the plate-type exchanger,
- compressor high temperature protection,
- PED safety valve

Available as accessories:

- condensation control (standard on some units),
- water flowswitch
- voltage monitor and sequence meter

> RELIABILITY

The design components chosen are highly reliable and the suppliers are all certified according to the current quality systems.

> CAREFUL DETAILS

Particular attention to the arrangement of the main components in the design stage, careful and scheduled testing, and the important stage of final production, ensure systems that are easy serviceable and guarantee a lasting high performance package.





> RESPECTING ENVIRONMENT

Use of ecological refrigerant gases (ODP equal to 0) for obtaining optimum performance and **DO NOT** harm the ozone.



> AQUASEL

The Ferrolì design staff have developed software for choosing the right unit for your system needs, calculating the performance values according to the air and water temperature, depending on the model or acoustic version.

There is also the selected choice of accessories the printing of the description of the unit's specifications and a complete technical data sheet.

At the end of selection the customer can have a list price or net price with discounts of all the selected units.

A sales tool much appreciated by professionals for its easy use and prompt answers.

The screenshot shows the 'casa' software interface. It includes sections for 'Tipologia', 'Livello sul mare [m]', 'Potenza frigorifera [kW]', and temperature settings for 'Estate' and 'Inverno'. A 'SERIE DISPONIBILI' list is on the right. At the bottom, a table lists various models and their specifications.

Serie	unità	Alimentazione	IP	Pa	PT	Pu	SWL	SRL
RGA	50.2	AB w3 - Base + Kit Silenzamento	209	187	51,6	18,7	84,0	66,0
RGA	50.2	AB - Base	52,9	18,0	53,2	18,0	87,0	69,0
RGA	50.2	A55 - Super Silenzato	50,1	19,2	50,5	18,8	81,0	63,0
RGA	60.2	A55 - Super Silenzato	54,5	21,6	55,1	20,7	81,0	63,0
RGA	60.2	AB w3 - Base + Kit Silenzamento	55,7	21,0	56,3	20,6	84,0	66,0
RGA	60.2	AB - Base	37,5	20,2	38,0	19,8	87,0	68,0
RGA	70.2	AB w3 - Base + Kit Silenzamento	65,1	23,4	65,6	23,0	84,0	66,0
RGA	70.2	AB - Base	67,2	22,1	67,7	22,1	87,0	69,0
RGA	70.2	A55 - Super Silenzato	63,6	24,1	64,3	23,1	81,0	63,0
RGA	80.2	AB - Base	74,1	26,3	76,2	24,9	87,0	69,0
RGA	80.2	AB w3 - Base + Kit Silenzamento	71,5	27,6	71,9	25,9	84,0	66,0
RGA	90.2	A55 - Super Silenzato	84,5	31,8	85,8	31,2	82,0	64,0
RGA	90.2	AB w3 - Base + Kit Silenzamento	86,5	32,9	88,6	31,1	85,0	67,0
RGA	90.2	AB - Base	89,2	31,6	91,4	31,8	89,0	70,0
RGA	100.2	AB - Base	99,0	35,0	103	33,0	89,0	70,0
RGA	100.2	A55 - Super Silenzato	93,8	37,4	97,9	36,5	82,0	64,0
RGA	100.2	AB w3 - Base + Kit Silenzamento	96,0	38,4	99,8	36,4	85,0	67,0
RGA	110.2	A55 - Super Silenzato	104	41,8	107	40,1	82,0	64,0
RGA	110.2	AB w3 - Base + Kit Silenzamento	107	40,4	110	40,0	85,0	67,0
RGA	115.2	AB - Base	115	39,0	115	38,4	88,0	70,0
RGA	130.2	A55 - Super Silenzato	118	46,7	119	44,6	82,0	64,0
RGA	130.2	AB w3 - Base + Kit Silenzamento	118	45,4	121	44,4	85,0	67,0
RGA	130.2	AB - Base	122	43,6	125	42,6	88,0	70,0
RGA	145.2	A55 - Super Silenzato	131	54,8	136	52,8	85,0	66,0
RGA	145.2	AB w3 - Base + Kit Silenzamento	134	53,2	139	52,5	88,0	69,0
RGA	145.2	AB - Base	138	51,2	143	50,5	91,0	72,0

For more information contact Ferrolì Air conditioning Industrial department

> Main characteristics water chillers

CHILLERS SEQUENCER

Capacity control of system become a major point of discussion both in the design stage and that of production.

The Ferroli design team, has developed a logic control that allows you to manage and monitor the operation of more chiller to serve a single plant.

> CHILLERS SEQUENCER


The controller, suitable for internal installation within a heating plant, as standard feature such as an electrical panel, (housed in a sheet metal enclosure) and complete with a main disconnecting switch, LEDs for displaying alarms and operation status (ON/OFF), manual summer/winter selector (provided for units with heat pump) and manual ON/OFF selector plus a large display for unit programming. A terminal block is fitted on a metal plate inside the panel to facilitate unit connections. The system comes standard complete with a telescopic-type water probe (picture below), IP65 protection rating, to facilitate reading the delivery temperature of the water inside the header or the hydraulic separator.

NTC-type sensitive element.

The sensor element is of the NTC.

System programming is designed to be clear and easy. Various menus can be accessed by buttons on the display for setting and programming management of the control system and units. Through the LCD display the following is possible:

- programming operation times,
- selecting the date and time,
- programming a holiday period,
- monitoring and modification of temperatures,
- monitoring and modification of control outputs,
- monitoring and modification of set-point,
- monitoring system status.

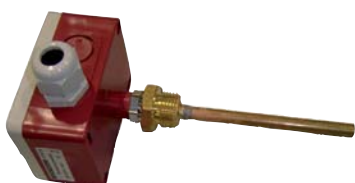

■ MANAGEMENT OF SEVERAL UNITS WITH PRIMARY PUMP

For correct system management the 3GFC and 6GFC controllers can control one pump (only 3GFC) or one twin pump (only 6GFC) serving the primary circuit if the units do not have them, as indicated in the example in figure A.

In this case the units are type **RMA VB AB 0M5** configured with just the pipe kit and connected in parallel. They are fed by a single pump. The choice of delivery pump is to the installer or designer. Pump electrical protection and power supply installation are the installer's responsibility.

■ MANAGEMENT OF UNITS WITH DOUBLE PRIMARY PUMP

Fig. A-1 implies the use of a 6GFC type panel enabling management of a twin pump serving the primary circuit.

NB: All the pumping accessories are complete with shut-off and safety valves, air vent, drain, expansion tank, one-way valves (only in case of twin pump), filter and pressure gauge for complete installation and easy service access.

All these components are the installer's responsibility.

The pumps electrical protection and power supply installation are the installer's responsibility.

Suggested connection diagram


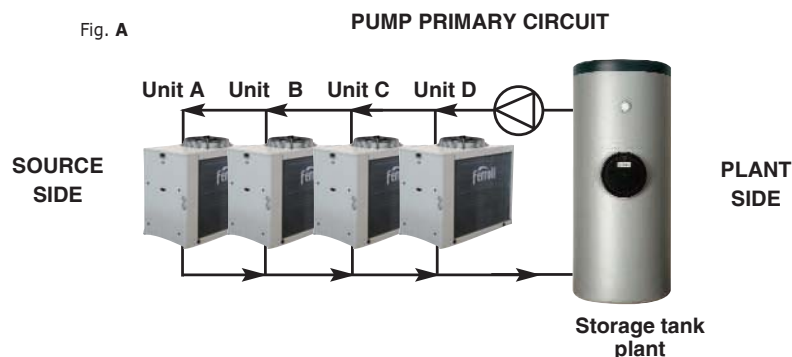



Fig. A-1

Suggested connection diagram

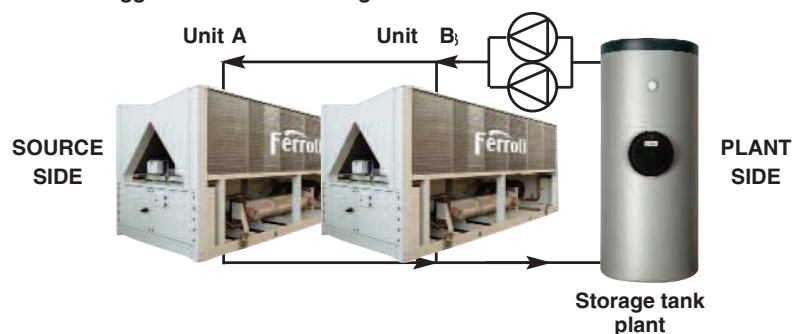

Connecting several units in cascade involves the calculation of a pumping system that correctly feeds each exchanger with the correct water flow-rate value given in the technical data of the units.

Qualified Ferroli personnel are available upon request to provide the delivery and pressure loss data of the units.

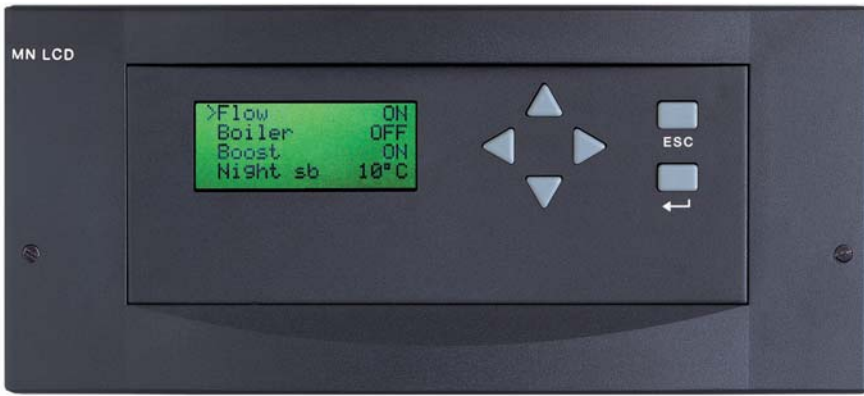

■ MANAGEMENT OF UNITS WITH PUMP FITTED INSIDE (ACCESSORY)

The Ferroli range encompasses (as an accessory when available), a range of pumping modules with tank, serving only the primary circuit (consisting of tank-pump-plate type exchanger) controlled directly by the micro-processor control.

This solution, as indicated in the example in figure B, enables the correct distribution of water even in the case of several units. The tank-pump (accessory) system is installed and tested at the factory.

NB: In specific cases, for correct operation and maintenance of the hydronic circuit all the components are fitted standard inside the unit (refer to the item "pumping modules" in the guide).

The installer only has to ensure the hydraulic connection of the units and the various electrical connections.

■ MANAGEMENT OF UNITS WITH PUMP FITTED INSIDE (ACCESSORY)



In the case opposite, six RLA units configured with just the Pipe Kit are connected to a 6GFC system.

The electrical panel controls the six units and the single or twin pump.

The pumps electrical protection and power supply installation are the installer's responsibility. The pumping system must be provided with a one-way valve (in case of twin pump), mesh filter, system calibration valves, expansion tank, safety valve and anything else necessary to make the system operational and easily serviced.

■ UNIT CONSENT MANAGEMENT

All the electrical connections for activation consent and for management of the units must be taken to the electrical panel and an NTC probe, supplied standard, and must be connected for the system water temperature reading.

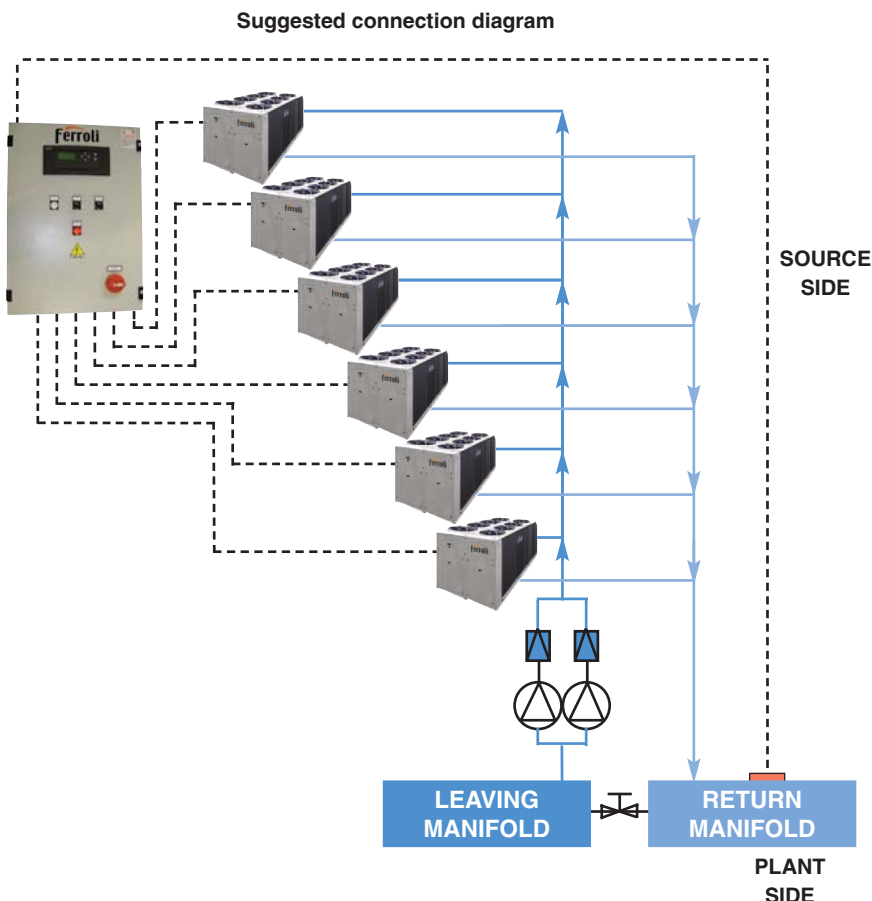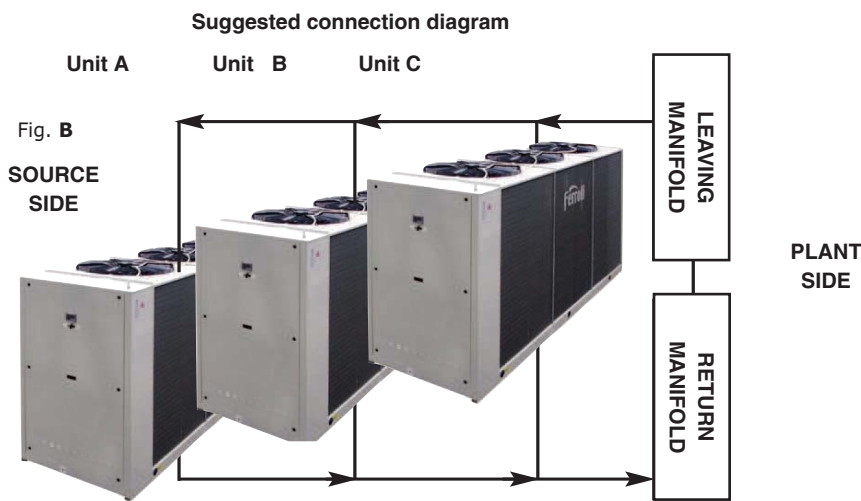

> RXA I

AIR-WATER HEAT PUMPS FOR OUTDOOR INSTALLATION
WITH DC INVERTER COMPRESSOR



NEW



Available range

Unit type

IP Heat pump
(reversible on the refrigerant side)

Versions

VB Base Version

Acoustic setting up

AB Base setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

The unit are equipped by a DC inverter compressor that allow a capacity modulation from 30 up to 120% of the rated capacity

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The units are also equipped with hydraulic component as water pump, expansion tank, safety valve for an easy and correct installation.

All the units are supplied with an outdoor temperature sensor, already installed on the unit, in order to realize the climatic control.

■ COMPRESSOR : DC inverter twin-rotary compressors for low vibration and wide application frequency range.

Mounted on damper support and covered by a double compressor shield for acoustic insulation further reduces noise levels. All compressors are equipped with crankcase heaters as standard.

■ REFRIGERANT CIRCUIT : Include bi-flow thermostatic expansion valve, dryer filter, refrigerant storage receiver brazed plate heat exchanger and reverse cycle valve.

■ PLANT SIDE HEAT EXCHANGER: braze-welded plate type in stainless steel (AISI 316) is thermally insulated in order to avoid condensate generation and to reduce thermal losses.

■ SOURCE SIDE HEAT EXCHANGER: finned coil made of copper pipes and aluminium louvered fins.

■ FAN : propeller fan type with speed modulation by a DC brushless motor. Include fan guard .

■ HYDRAULIC KIT : the units it's equipped by a hydraulic including:

- three speed water pump,
- flow switch
- expansion tank
- automatic air purge
- safety valve

Accessories

Base wire remote control Rem B

Clima Control wire remote control Rem CC

Additional environmental air sensor SAE

HYDRONIC KIT



CONTROL SYSTEM

The control system allow the control of all the functionality of the inverter system and the correct working status of compressor and all device inside the units.

It include also algorithms for the climate control by Pre-set or customised selection of the appropriate climate curve for stable output capacity to match the heat load. The system manage a hot water sanitary circuit, and it's possible to set a daily or weekly programming to optimise the efficiency and reduce the noise. All the alarm are detected and displayed by the controller. Additional function as anti-blockage pump and integration with external device for bivalent heating system are available.

UNITS SET-UP

All the unity are provided with a pre-setting parameter condition. To optimise the working condition, in accordance with the specific customer application, the units need a setting procedure to do during the installation.

THE USER INTERFACE

The units are provided without any user interface on board. Two different interface type are available as accessories and must be selected in accordance with the specific use request. The first one called Rem B it simply drive the units in accordance with the pre-set parameter. The second ones called Rem CC care manly to the ambient comfort and drive the units in accordance of this. It permit also by the large LCD display to read and control the ambient temperature condition and to set and check any working parameter of the units.

1) Base user interface Rem B

It permit the following control

- ON-OFF
- Mode control Heating\Cooling
- Working condition Standard or Night Time Economy

It adopt the working set point condition defined in factory or set during the installation.

The control show the working status of the units and any alarm by the LED.



2) Clima Control user interface Rem CC

It can control the units in accordance with the ambient climate status, operating on the leaving water temperature. All the units working parameter and ambient condition can be set, read and control thought it by a bi-directional communication with the units.

It permit the following control:

- ON-OFF
- Mode control Heating\Cooling
- Timer setting – daily or weekly
- Set point condition (ambient or leaving water temperature)
- Lock function
- Quick selection of the occupancy ambient status IN-OUT-NIGHT

The control care manly to the ambient comfort and drive the units in accordance of this.

All the working status, parameter and alarm are displayed on it



TECHNICAL DATA

Models	04	06	08	12	14	UM
General data						
Power supply	230-1-50					V-Ph.Hz
Refrigerant	R-410A	R-410A	R-410A	R-410A	R-410A	Tipo
Quantity and type of compressor	1-DC Single rotary	1-DC Twin rotary	1-DC Twin rotary	1-DC Twin rotary	1-DC Twin rotary	N° - tipo
Expansion valve	Electronica PWM	Electronica PWM	Electronica PWM	Electronica PWM	Electronica PWM	tipo
Evaporator water tank	0,80	0,8	1,0	2,3	2,30	l
Connections	1" M	1" M	1" M	1" M	1" M	" GAS
Quantity / diameter fans	1 - 495	1 - 495	1 - 495	2 - 495	2 - 495	N° - mm
Volume expansion tank	2	2	2	3	3	l
Maximum hydraulic pressure	300	300	300	300	300	KPa
Working head	47	43	40	45	30	KPa
Weight unit	59	61	71	105	130	kg
Standard plant						
Cooling capacity NOM	3,30	4,70	5,80	10,20	13,00	kW
Cooling capacity MIN - MAX	0,50 - 3,5	0,74 - 5,33	0,50 - 5,80	3,83 - 11,70	3,75 - 13,5	kW
Total power input - NOM	1,13	1,60	1,97	3,46	4,47	kW
EER	2,91	2,94	2,94	2,95	2,91	-
ESSER	4,5	4,6	4,4	4,3	4,4	-
Water flow	568	808	998	1754	2236	l/h
Efficiency Class Eurovent	B	B	B	B	B	
Heating capacity NOM	3,9	5,80	7,40	12,90	14,00	kW
Heating capacity MIN - MAX	0,73 - 4,30	1,06 - 6,00	1,34 - 8,00	3,47 - 12,90	3,07 - 16,05	kW
Total power input - NOM	1,22	1,90	2,32	4,26	4,36	kW
COP	3,20	3,05	3,19	3,03	3,21	-
Water flow	671	998	1273	2219	2408	l/h
Efficiency Class Eurovent	A	B	B	B	A	l/h
Radiant plant						
Cooling capacity NOM	4,90	7,00	7,80	13,50	16,00	kW
Cooling capacity MIN - MAX	0,8 - 5,22	1,20 - 7,49	1,00 - 8,20	5,88 - 16,12	5,9 - 17,31	kW
Total power input - NOM	1,21	1,92	1,98	3,68	4,2	kW
EER	4,05	3,65	3,94	3,67	3,81	-
Water flow	843	1204	1342	2322	2752	l/h
Efficiency Class Eurovent	A	B	A	B	A	
Heating capacity NOM	4,10	5,80	7,20	11,90	14,50	kW
Heating capacity MIN - MAX	0,73 - 4,73	1,08 - 6,14	1,34 - 8,00	3,60 - 13,45	3,10 - 16,49	kW
Total power input - NOM	1,01	1,37	1,82	3,01	3,57	kW
COP	4,05	4,23	3,96	3,95	4,06	-
Water flow	705	998	1238	2047	2494	l/h
Efficiency Class Eurovent	A	A	B	B	A	
Sound levels						
Cooling sound power	64	64	65	68	69	dB(A)
Heating sound power	62	62	64	67	68	dB(A)
Cooling sound pressure	44	44	45	48	49	dB(A)
Heating sound pressure	42	42	44	47	48	dB(A)

NOTES:

Standard plant working condition cooling mode: heat exchanger entering/leaving water temp. 12°C/7°C, outside air temp. 35°C.

Standard plant working condition heating mode: water heat exchanger entering/leaving water temp. 40°C/45°C, outside air temp. 7°C db/6°C wb.

Radiant plant working condition cooling mode: water heat exchanger entering/leaving water temp. 23°C/18°C, outside air temp. 35°C.



Radiant plant working condition heating mode: water heat exchanger entering/leaving water temp. 30°C/35°C, outside air temp. 7°C db/6°C wb.

The sound pressure level is measured in a hemispheric field at 4 m distance from the unit.

ESEER : Seasonal efficiency ratio in cooling mode.

OPERATING LIMITS


The units can operate in the conditions describe in the graf below:

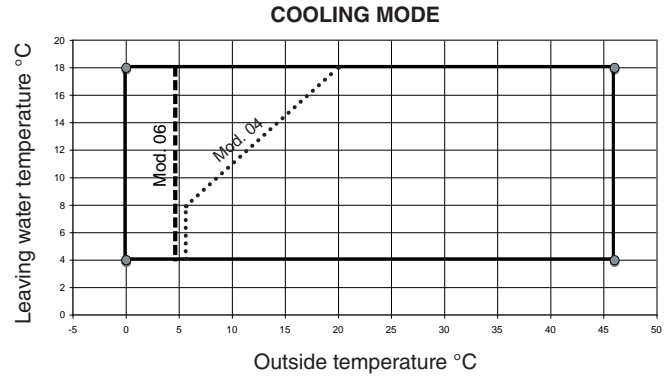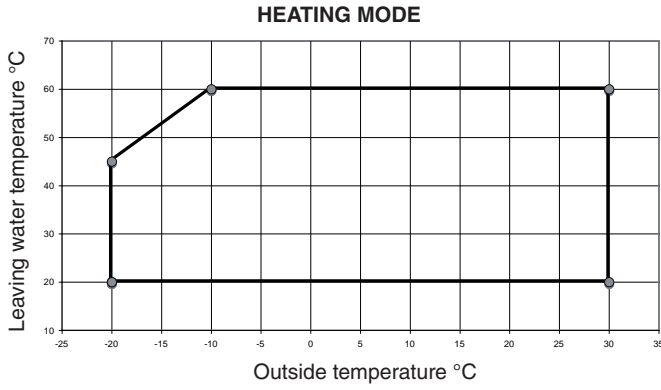

PLANT APPLICATION


The units are able to control a three way valve in case of hot sanitary water demand coming from a sanitary water tank. It's also able to activate an external heat source like wall hang boiler in case of lower environmental temperature. In case of high humidity value it also can activate a dehumidifier

The leaving water temperature permit to use the units to fan coil plants or to radiant floor plants too.

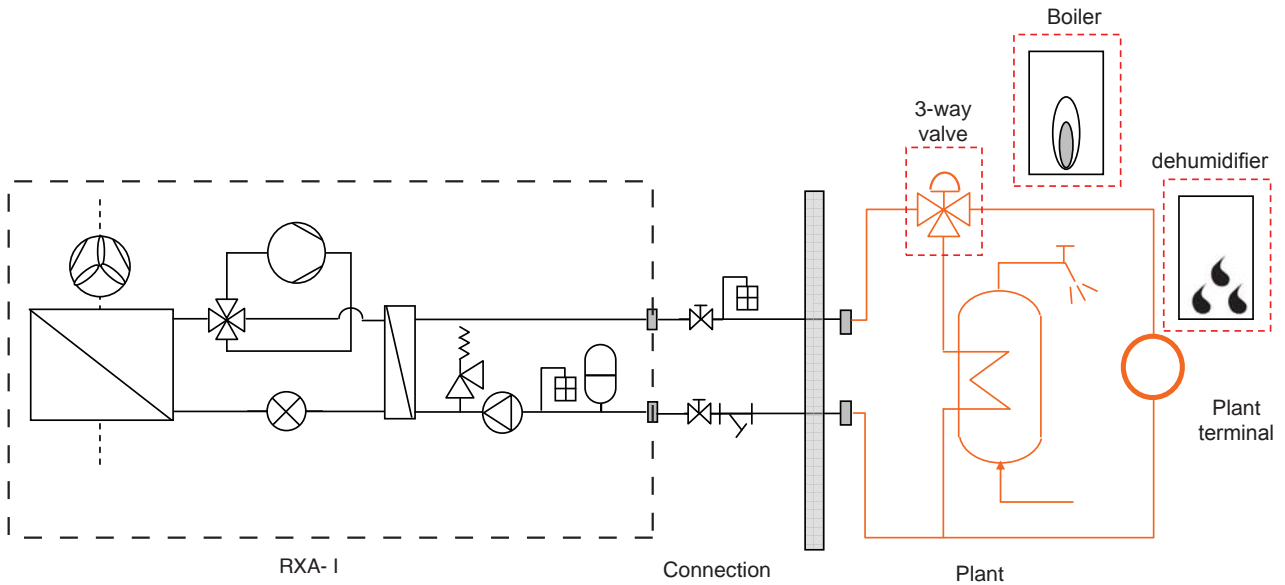


DIMENSION

Mod. 04 - 06 - 08

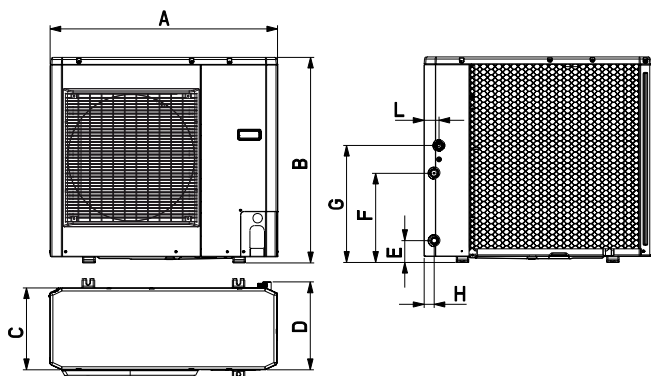

Mod. 12 - 14

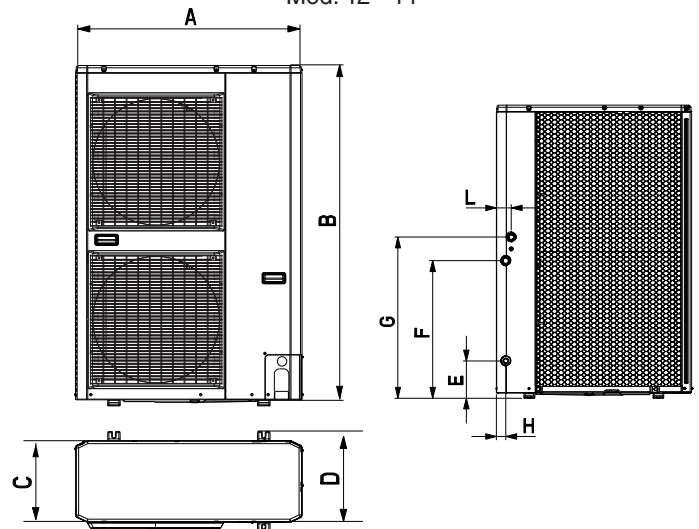

MOD.	A	B	C	D	E	F	G	H	L
04 - 06 - 08	908	821	326	350	87	356	466	40	60
12 - 14	908	1363	326	350	174	640	750	44	69

> RXA

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

- IR Chiller
- IP Heat pump
(reversible on the refrigerant side)

Versions

- VB Base Version
- VP Pump version
- VA Tank version

Acoustic setting up

- AB Base setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with rotary or scroll compressor (according to the model) mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve, reverse cycle valve, axial fans

with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units are equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

All the units are supplied with an outdoor temperature sensor, already installed on the unit, in order to realize the climatic control.

All three-phase power supply units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module

- not present (VB - base version)
- standard, high head or modulating pump (VP - pump version)
- tank and standard, high head or modulating pump (VA - tank version)

Integrative electrical heaters

- standard in the flow
(only VB and VP versions)
- standard in the tank
(only VA version)
- upsized in the tank
(only VA version)

Compressor starting

- standard (contactors)
- soft starter

Accessories

Rubber vibration dampers

Coil protection grille

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
A35W7	Cooling capacity	6,24	7,24	9,12	10,6	14,1	16,7	kW
	Power input	2,31	2,81	3,52	4,16	5,25	6,49	kW
	EER	2,70	2,58	2,59	2,55	2,69	2,57	W/W
	ESEER	3,23	2,92	2,83	2,93	3,02	2,92	W/W
	Water flow rate	0,30	0,35	0,44	0,51	0,68	0,80	l/s
	Pressure drops	17	21	31	40	43	39	kPa
IP	Base setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
A35W7	Cooling capacity	6,12	7,10	8,95	10,4	13,8	16,4	kW
	Power input	2,31	2,81	3,51	4,15	5,24	6,49	kW
	EER	2,65	2,53	2,55	2,51	2,63	2,53	W/W
	ESEER	3,11	2,79	2,76	2,88	2,98	2,89	W/W
	Water flow rate	0,29	0,34	0,43	0,50	0,66	0,79	l/s
	Pressure drops	16	20	30	39	42	38	kPa
A7W45	Heating capacity	6,78	7,87	9,95	11,7	15,4	18,2	kW
	Power input	2,22	2,71	3,38	4,01	5,06	6,25	kW
	COP	3,05	2,90	2,94	2,92	3,04	2,91	W/W
	Water flow rate	0,32	0,37	0,47	0,55	0,73	0,86	l/s
	Pressure drops	18	24	35	45	48	43	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio) = Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
Sound power level ^(E)	69	69	72	72	74	74	dB(A)
Sound pressure level at 1 meter	55	55	57	57	59	59	dB(A)
Sound pressure level at 5 meters	44	44	46	46	48	48	dB(A)
Sound pressure level at 10 meters	38	38	41	41	43	43	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	6.1	7.1	9.1	11.1	14.1	17.1	
Power supply	230 - 1 - 50		230 - 1 - 50 400 - 3N - 50		400 - 3N - 50		V-ph-Hz
Compressor type	rotative		scroll				-
N° compressors / N° refrigerant circuits	1 / 1						n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	1						n°
Tank volume	33		50		71		l
Hydraulic fittings	1" M						-

Electrical data

Standard unit	6.1	7.1	9.1	11.1	14.1	17.1	
Power supply	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50 / 400 -3N- 50	230 - 1 - 50 / 400 -3N- 50	400 -3N- 50	400 -3N- 50	V-ph-Hz
FLA - Full load current at maximum tolerated conditions	13,4	17,1	22,0 / 8,1	24,8 / 9,0	11,1	13,9	A
FLI - Full load power input at maximum tolerated conditions	2,9	3,7	4,7 / 4,7	5,3 / 5,3	6,2	8,0	kW
MIC - Maximum instantaneous current of the unit	82	112	141 / 54	174 / 69	87	106	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	41	43	49 / 33	59 / 40	48	55	A
Unit with high head modulating pump	6.1	7.1	9.1	11.1	14.1	17.1	
Power supply	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50 / 400 -3N- 50	230 - 1 - 50 / 400 -3N- 50	400 -3N- 50	400 -3N- 50	V-ph-Hz
FLA - Full load current at maximum tolerated conditions	14.4	18.1	23.3 / 9.4	26.1 / 10.3	12.9	15.7	A
FLI - Full load power input at maximum tolerated conditions	3.1	3.9	4.95 / 4.95	5.55 / 5.55	6.55	8.35	kW
MIC - Maximum instantaneous current of the unit	83	113	142.3 / 55.3	175.3 / 70.3	88.8	107.8	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	42	44	50.3 / 34.3	60.3 / 41.3	49.8	56.8	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, IP	-10	48	-15	42	°C
Water outlet temperature	IR, IP	5	25	30	55	°C

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water temperature management (through set point adjustment)
- climatic control in heating and in cooling mode (automatic set point adjustment according to outdoor air temperature)
- dynamic defrost cycle management according to outdoor air temperature
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump management
- integrative electrical heaters management in heating mode (2 step logic)
- compressor and pump operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

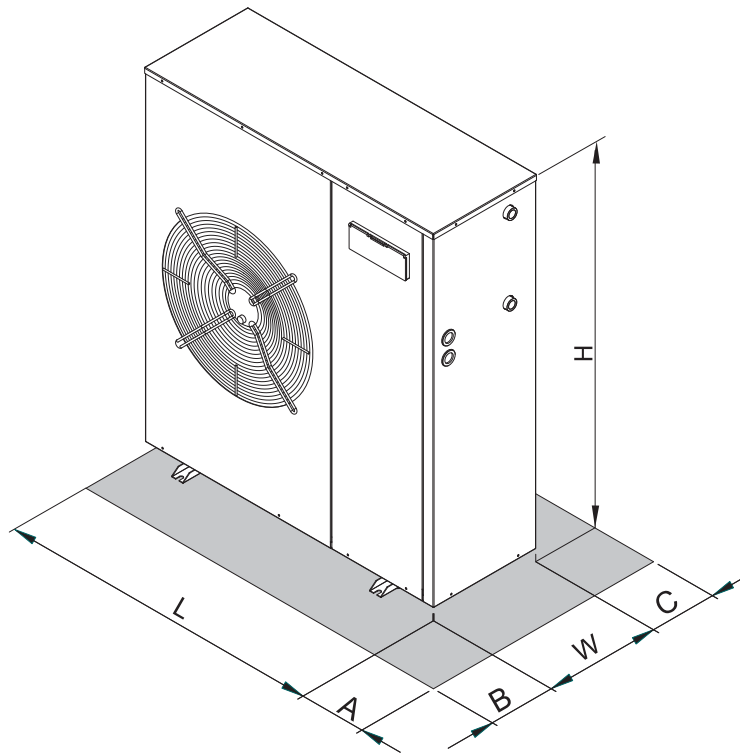

	Version	6.1	7.1	9.1	11.1	14.1	17.1	
L	VB - VP	994	994	994	994	994	994	mm
	VA	1329	1329	1329	1329	1329	1329	mm
W	-	356	356	356	356	356	356	mm
H	-	903	903	1153	1153	1453	1453	mm
A	-	400	400	400	400	400	400	mm
B	-	600	600	600	600	600	600	mm
C	-	200	200	200	200	200	200	mm
Operating maximum weight*	VA	164	171	220	238	285	294	kg

> RMA²

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Versions

VB	Base Version
VP	Pump version
VA	Tank version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressor mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve, reverse cycle valve, axial fans with safety protection grilles, finned coil made of cop-

per pipes and aluminium louvered fins. The circuit is protected by high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module

- not present (VB - base version)
- standard, high head or modulating pump (VP - pump version)
- tank and standard, high head or modulating pump (VA - tank version)

Tank electrical heater

- not present
- antifreeze
- integrative

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control) standard for AS unit

Electrical loads protection

- fuses
- thermal magnetic circuit breakers

Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Manometer

Oil crankcase electrical heater (only for IR/BR unit, standard for IP/BP unit)

Pressure transducer

Coil protection kit for shipment

Outdoor air sensor

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,7	22,2	25,7	30,2	34,6	40,4	kW
	Power input	6,84	7,67	8,80	10,80	12,1	14,0	kW
	EER	2,88	2,89	2,92	2,80	2,86	2,88	W/W
	ESEER	3,23	3,24	3,28	3,13	3,20	3,23	W/W
	Water flow rate	3412	3848	4459	5233	5998	6988	l/h
	Pressure drops	32	41	37	40	39	37	kPa
IR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	18,9	21,3	24,7	29,0	33,3	38,8	kW
	Power input	7,34	8,25	9,43	11,57	13,1	15,1	kW
	EER	2,58	2,58	2,62	2,51	2,55	2,57	W/W
	ESEER	2,89	2,89	2,94	2,81	2,85	2,88	W/W
	Water flow rate	3275	3691	4286	5030	5763	6710	l/h
	Pressure drops	30	38	34	37	36	34	kPa
IP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,3	21,8	25,2	29,6	34,0	39,6	kW
	Power input	6,76	7,58	8,68	10,66	12,00	13,90	kW
	EER	2,85	2,87	2,91	2,78	2,83	2,85	W/W
	ESEER	3,20	3,22	3,26	3,11	3,17	3,19	W/W
	Water flow rate	3344	3778	4373	5132	5881	6850	l/h
	Pressure drops	31	40	35	38	38	36	kPa
A7W45	Heating capacity	20,8	23,4	27,2	32,2	37,0	41,8	kW
	Power input	6,53	7,35	8,52	10,54	11,82	13,28	kW
	COP	3,18	3,18	3,19	3,06	3,13	3,15	W/W
	Water flow rate	3543	3990	4648	5504	6312	7138	l/h
	Pressure drops	35	44	40	44	43	39	kPa
IP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	18,5	20,9	24,3	28,5	32,6	38,0	kW
	Power input	7,26	8,18	9,34	11,46	13,00	14,92	kW
	EER	2,55	2,55	2,60	2,48	2,51	2,55	W/W
	ESEER	2,86	2,86	2,91	2,78	2,81	2,85	W/W
	Water flow rate	3207	3622	4200	4928	5645	6572	l/h
	Pressure drops	28	36	32	35	35	33	kPa
A7W45	Heating capacity	19,7	22,3	25,9	30,8	35,2	39,8	kW
	Power input	6,32	7,05	8,21	10,16	11,40	12,80	kW
	COP	3,12	3,16	3,16	3,03	3,09	3,11	W/W
	Water flow rate	3357	3801	4424	5248	6009	6799	l/h
	Pressure drops	31	40	36	40	39	35	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	77	77	78	81	82	82	dB(A)
Sound pressure level at 1 meter	61	62	62	65	66	66	dB(A)
Sound pressure level at 5 meters	51	51	52	55	55	56	dB(A)
Sound pressure level at 10 meters	46	46	47	50	50	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	59	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	48	48	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3+N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	1						n°
Tank volume	85						l
Hydraulic fittings	1"1/4 GAS						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	15,8	17,6	19,1	24,4	26,8	30,8	A
FLI - Full load power input at maximum tolerated conditions	9,2	10,7	12,0	14,6	16,1	18,4	kW
MIC - Maximum instantaneous current of the unit	106	116	129	156	160	191	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	61	67	74	85	87	106	A
Unit with standard modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	17,3	19,1	20,6	26,0	28,4	32,4	A
FLI - Full load power input at maximum tolerated conditions	9,8	11,3	12,6	15,4	16,9	19,2	kW
MIC - Maximum instantaneous current of the unit	107	117	130	158	162	193	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	86	89	107	A
Unit with high head modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	17,5	19,3	20,8	27,4	29,8	33,8	A
FLI - Full load power input at maximum tolerated conditions	10,1	11,5	12,9	16,2	17,7	20,0	kW
MIC - Maximum instantaneous current of the unit	108	118	131	159	163	194	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	88	90	109	A

Operating range

Temperatura	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	48	-15	42	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)

* with fans modulating control option (condensation / evaporation control)

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode, automatic set point adjustment according to outdoor air temperature (if present "outdoor air sensor" accessory)
- dynamic defrost cycle management according to outdoor air temperature (if present "outdoor air sensor" accessory)
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump management
- integrative electrical heaters management in heating mode
- compressor and pump operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

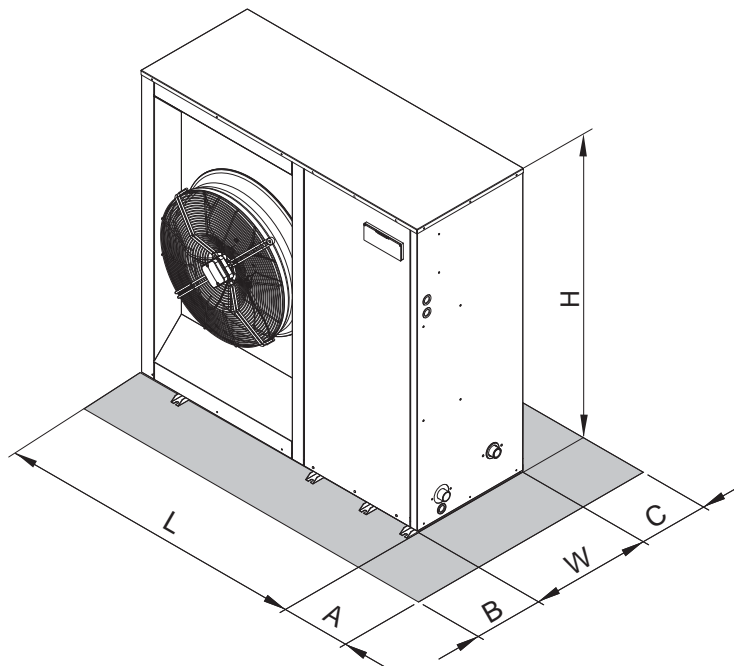

	19.1	22.1	26.1	30.1	35.1	40.1	
L		1494			1704		mm
W		576			576		mm
H		1453			1453		mm
A		400			400		mm
B		600			600		mm
C		200			200		mm
Maximum weight operation (VA Tank version)	349	352	371	385	410	412	kg

> RMA² HE

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Versions

VB	Base Version
VP	Pump version
VA	Tank version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressor mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve, reverse cycle valve, axial fans with safety

protection grilles, finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module

- not present (VB - base version)
- standard, high head or modulating pump (VP - pump version)
- tank and standard, high head or modulating pump (VA - tank version)

Integrative electrical heaters

- not present
- standard in the tank

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Electrical loads protection

- fuses
- thermal magnetic circuit breakers

Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Manometer

Oil crankcase electrical heater (only for IR/BR unit, standard for IP/BP unit)

Pressure transducer

Coil protection kit for shipment

Outdoor air sensor

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	20,3	22,7	26,4	31,5	35,5	41,4	kW
	Power input	6,49	7,25	8,36	10,09	11,3	13,0	kW
	EER	3,12	3,13	3,16	3,12	3,14	3,17	W/W
	ESEER	3,50	3,51	3,54	3,49	3,52	3,55	W/W
	Water flow rate	3512	3929	4566	5442	6140	7150	l/h
	Pressure drops	27	25	24	28	29	27	kPa
IR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,5	21,8	25,4	30,3	34,2	39,9	kW
	Power input	6,98	7,80	9,00	10,85	12,1	13,9	kW
	EER	2,79	2,80	2,82	2,79	2,81	2,87	W/W
	ESEER	3,13	3,13	3,16	3,13	3,15	3,22	W/W
	Water flow rate	3372	3771	4391	5235	5905	6890	l/h
	Pressure drops	25	23	22	26	27	25	kPa
IP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,9	22,3	25,9	30,9	34,8	40,5	kW
	Power input	6,42	7,17	8,25	9,96	11,20	12,95	kW
	EER	3,10	3,11	3,14	3,10	3,11	3,13	W/W
	ESEER	3,47	3,49	3,51	3,47	3,48	3,51	W/W
	Water flow rate	3442	3859	4478	5337	6020	7008	l/h
	Pressure drops	26	24	23	27	28	26	kPa
A7W45	Heating capacity	21,1	24,0	27,8	32,3	37,0	42,7	kW
	Power input	6,42	7,14	8,25	10,01	11,21	12,83	kW
	COP	3,29	3,36	3,37	3,22	3,29	3,33	W/W
	Water flow rate	3612	4096	4763	5517	6320	7310	l/h
	Pressure drops	29	27	26	29	31	28	kPa
IP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,1	21,4	24,9	29,7	33,5	39,0	kW
	Power input	6,91	7,74	8,91	10,75	12,06	13,74	kW
	EER	2,76	2,77	2,79	2,76	2,77	2,84	W/W
	ESEER	3,09	3,10	3,13	3,09	3,11	3,18	W/W
	Water flow rate	3302	3700	4303	5129	5785	6748	l/h
	Pressure drops	24	22	21	25	26	24	kPa
A7W45	Heating capacity	20,1	22,9	26,6	31,0	35,2	40,8	kW
	Power input	6,23	6,90	8,00	9,70	10,87	12,42	kW
	COP	3,22	3,32	3,32	3,20	3,24	3,28	W/W
	Water flow rate	3422	3902	4533	5261	6016	6963	l/h
	Pressure drops	26	25	23	26	28	26	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio) = Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	77	77	78	81	82	82	dB(A)
Sound pressure level at 1 meter	61	62	62	65	66	66	dB(A)
Sound pressure level at 5 meters	51	51	52	55	55	56	dB(A)
Sound pressure level at 10 meters	46	46	47	50	50	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	59	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	48	48	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unità	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3+N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	1						n°
Tank volume	85						l
Hydraulic fittings	1"1/4 GAS						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	15,8	17,6	19,1	24,4	26,8	30,8	A
FLI - Full load power input at maximum tolerated conditions	9,2	10,7	12,0	14,6	16,1	18,4	kW
MIC - Maximum instantaneous current of the unit	106	116	129	156	160	191	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	61	67	74	85	87	106	A
Unit with standard modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	17,3	19,1	20,6	26,0	28,4	32,4	A
FLI - Full load power input at maximum tolerated conditions	9,8	11,3	12,6	15,4	16,9	19,2	kW
MIC - Maximum instantaneous current of the unit	107	117	130	158	162	193	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	86	89	107	A
Unit with high head modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	17,5	19,3	20,8	27,4	29,8	33,8	A
FLI - Full load power input at maximum tolerated conditions	10,1	11,5	12,9	16,2	17,7	20,0	kW
MIC - Maximum instantaneous current of the unit	108	118	131	159	163	194	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	88	90	109	A

Operating range

Temperatura	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	50	-15	42	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)

* with fans modulating control option (condensation / evaporation control)

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode, automatic set point adjustment according to outdoor air temperature (if present "outdoor air sensor" accessory)
- dynamic defrost cycle management according to outdoor air temperature (if present "outdoor air sensor" accessory)
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump management
- integrative electrical heaters management in heating mode
- compressor and pump operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

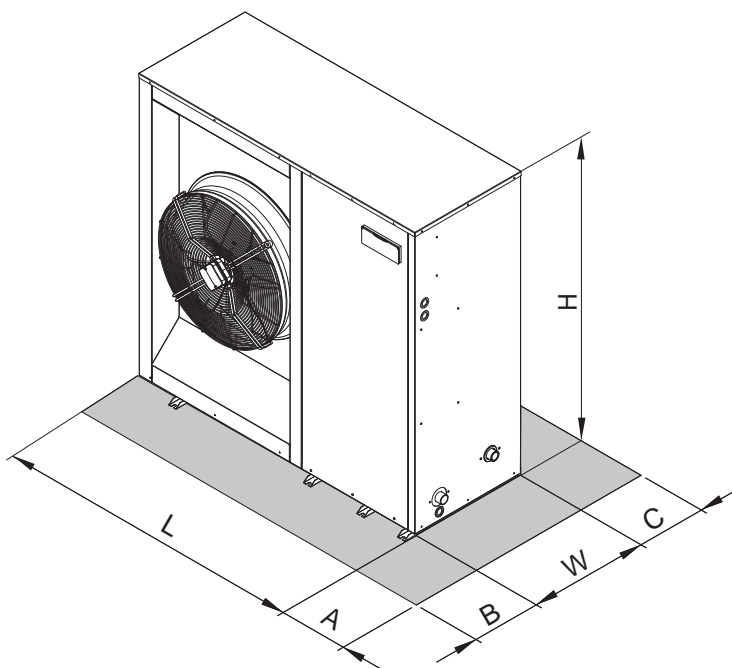

	19.1	22.1	26.1	30.1	35.1	40.1	
L		1494			1704		mm
W		576			576		mm
H		1453			1453		mm
A		400			400		mm
B		600			600		mm
C		200			200		mm
Maximum weight operation (VA Tank version)	364	367	391	412	438	440	kg

> RGA

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option for IR),

reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer

- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	45,0	53,0	58,1	68,2	78,1	90,3	101	111	125	142	157	179	198	kW
	Power input	15,7	18,8	20,8	24,1	28,0	32,5	35,9	39,9	45,1	51,5	57,1	64,6	71,6	kW
	EER	2,87	2,82	2,79	2,83	2,79	2,78	2,81	2,78	2,77	2,76	2,75	2,77	2,77	W/W
	ESEER	3,88	3,85	3,80	3,86	3,79	3,88	3,81	3,88	3,77	3,84	3,72	3,75	3,77	W/W
	Water flow rate	2,16	2,56	2,80	3,29	3,76	4,35	4,87	5,35	6,02	6,83	7,55	8,60	9,56	l/s
	Pressure drops	40	56	55	51	50	48	46	44	48	47	48	48	50	kPa
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,6	51,5	56,3	66,2	75,7	87,6	97,8	108	121	138	152	174	193	kW
	Power input	16,3	19,4	21,6	24,9	29,2	33,7	37,3	41,4	46,8	53,4	59,2	67,0	74,3	kW
	EER	2,67	2,65	2,61	2,66	2,59	2,60	2,62	2,61	2,59	2,58	2,57	2,60	2,60	W/W
	ESEER	3,76	3,74	3,70	3,75	3,66	3,76	3,69	3,78	3,65	3,74	3,62	3,65	3,66	W/W
	Water flow rate	2,10	2,48	2,71	3,19	3,65	4,21	4,71	5,21	5,83	6,64	7,31	8,36	9,27	l/s
	Pressure drops	38	53	52	48	47	45	43	42	45	44	45	45	47	kPa
IR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	42,7	50,3	55,1	64,7	74,0	85,6	95,6	105	118	134	149	169	188	kW
	Power input	16,3	19,8	22,1	25,4	29,9	32,8	38,3	42,6	48,1	54,3	60,3	68,8	76,2	kW
	EER	2,62	2,54	2,49	2,55	2,47	2,61	2,50	2,46	2,45	2,47	2,47	2,46	2,47	W/W
	ESEER	3,91	3,83	3,75	3,84	3,71	4,04	3,74	3,81	3,70	3,81	3,71	3,69	3,71	W/W
	Water flow rate	2,05	2,42	2,65	3,12	3,56	4,12	4,60	5,06	5,69	6,45	7,17	8,12	9,03	l/s
	Pressure drops	36	50	49	46	45	43	41	39	43	42	43	43	45	kPa
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,5	52,4	57,0	66,7	73,6	88,5	98	109	121	137	153	177	196	kW
	Power input	15,5	19,0	20,7	24,1	27,0	32,3	35,7	39,8	44,5	50,3	56,3	63,5	71,2	kW
	EER	2,81	2,76	2,75	2,77	2,73	2,74	2,75	2,74	2,72	2,72	2,72	2,79	2,75	W/W
	ESEER	3,79	3,77	3,75	3,75	3,69	3,82	3,73	3,82	3,69	3,79	3,68	3,77	3,74	W/W
	Water flow rate	2,09	2,53	2,75	3,21	3,54	4,26	4,73	5,26	5,83	6,59	7,36	8,50	9,46	l/s
	Pressure drops	37	55	53	49	44	46	43	43	45	44	46	47	49	kPa
A7W45	Heating capacity	48,1	58,1	63,2	74,5	83,0	99,6	110	125	136	154	173	197	216	kW
	Power input	15,6	19,1	20,9	24,4	27,6	33,5	35,9	41,1	44,9	51,8	56,9	65,1	71,7	kW
	COP	3,08	3,04	3,02	3,05	3,01	2,97	3,06	3,04	3,03	2,97	3,04	3,03	3,01	W/W
	Water flow rate	2,28	2,75	2,99	3,53	3,93	4,72	5,21	5,92	6,45	7,31	8,17	9,32	10,2	l/s
	Pressure drops	45	65	63	59	55	57	53	54	55	54	56	56	57	kPa
IP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	41,8	50,4	54,8	64,0	70,6	85,0	94,4	105	116	131	147	170	189	kW
	Power input	16,0	20,0	21,8	25,5	28,6	34,1	37,7	42,0	47,0	53,1	59,5	67,1	75,3	kW
	EER	2,61	2,52	2,51	2,51	2,47	2,49	2,50	2,50	2,47	2,47	2,47	2,53	2,51	W/W
	ESEER	3,65	3,56	3,54	3,54	3,48	3,61	3,51	3,63	3,48	3,56	3,48	3,56	3,53	W/W
	Water flow rate	2,01	2,43	2,64	3,08	3,40	4,09	4,54	5,06	5,59	6,31	7,07	8,17	9,08	l/s
	Pressure drops	35	50	49	45	41	42	40	39	41	40	42	43	45	kPa
A7W45	Heating capacity	46,9	56,5	61,7	72,5	80,9	97,0	107	122	133	150	168	192	211	kW
	Power input	14,9	18,2	20,0	23,2	26,4	31,9	34,2	39,2	42,8	49,4	54,3	62,1	68,5	kW
	COP	3,15	3,10	3,09	3,13	3,06	3,04	3,13	3,11	3,11	3,04	3,09	3,09	3,08	W/W
	Water flow rate	2,23	2,68	2,92	3,44	3,83	4,60	5,06	5,78	6,31	7,12	7,98	9,08	9,99	l/s
	Pressure drops	43	61	60	56	52	54	50	51	53	51	54	54	55	kPa
IP	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	41,0	49,3	53,7	62,8	69,3	83,3	92,5	102	114	129	144	166	185	kW
	Power input	17,1	21,1	23,0	26,8	30,1	35,9	39,8	44,3	49,5	56,0	62,7	70,8	79,4	kW
	EER	2,40	2,34	2,33	2,34	2,30	2,32	2,32	2,30	2,30	2,30	2,30	2,34	2,33	W/W
	ESEER	3,58	3,52	3,51	3,51	3,45	3,58	3,49	3,56	3,46	3,56	3,45	3,52	3,49	W/W
	Water flow rate	1,97	2,37	2,58	3,02	3,33	4,00	4,45	4,92	5,49	6,21	6,93	7,98	8,89	l/s
	Pressure drops	33	48	47	43	39	41	38	37	40	39	40	41	43	kPa
A7W45	Heating capacity	45,2	54,5	59,4	70,0	78,0	93,5	104	118	128	145	162	184	203	kW
	Power input	14,2	17,3	19,0	22,2	25,1	30,4	32,7	37,3	40,8	47,1	51,7	59,1	65,1	kW
	COP	3,18	3,15	3,13	3,15	3,11	3,08	3,18	3,16	3,14	3,08	3,13	3,11	3,12	W/W
	Water flow rate	2,15	2,58	2,81	3,32	3,70	4,43	4,92	5,59	6,07	6,88	7,69	8,74	9,60	l/s
	Pressure drops	40	57	55	52	48	50	47	48	49	48	50	50	50	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.
A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level ^(E)	82	82	83	84	84	85	85	85	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	66	67	67	67	68	69	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	57	58	58	58	59	60	60	61	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level ^(E)	79	79	80	81	81	82	82	82	83	84	84	85	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	63	64	64	64	65	66	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	54	55	55	55	56	57	57	58	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	49	50	50	50	51	52	52	53	53	dB(A)
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level ^(E)	77	77	78	79	79	80	80	80	81	82	82	83	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	61	62	62	62	63	64	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	47	48	48	48	49	50	50	51	51	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3+N - 50						400 - 3 - 50						V-ph-Hz	
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Plant side heat exchanger type	stainless steel brazed plates													-
Source side heat exchanger type	finned coil													-
Fans type	axial													-
N° fans	2	3			2			3	4			n°		
Tank volume	200						400			460				l
Hydraulic fittings	2" VICTAULIC						2" 1/2 VICTAULIC						-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	170	A
FLI - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	103	kW
MIC - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	391	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	272	A
Unit with high head modulating pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	46,3	51,8	59,4	64,8	76,0	81,6	96,1	107	115	132	147	169	180	A
FLI - Full load power input at maximum tolerated conditions	25,1	27,9	31,9	34,5	42,1	47,5	58,5	65,1	70,6	80,3	89,6	102	109	kW
MIC - Maximum instantaneous current of the unit	140	150	155	179	219	270	265	276	276	357	372	365	402	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	95,4	102	107	123	150	180	181	192	192	209	257	258	282	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat. **The Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	15,3	18,3	20,3	23,4	27,3	31,8	35,1	38,9	44	50,3	55,8	63	69,9	kW
	EER	3,05	3	2,98	3,03	2,97	2,95	2,99	2,96	2,95	2,94	2,92	2,94	2,95	W/W
	HRE	3,93	3,86	3,84	3,88	3,83	3,8	3,86	3,85	3,83	3,81	3,8	3,82	3,83	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54	kPa
	Heating recovery capacity	13,5	15,7	17,6	20	23,6	27,1	30,4	34,4	38,4	44	49,3	55,4	61,3	kW
	Water flow rate recovery	0,65	0,75	0,84	0,96	1,13	1,29	1,45	1,64	1,83	2,1	2,36	2,65	2,93	l/s
	Water pressure drop recovery	6	9	11	14	19	15	18	11	14	18	22	18	21	kPa
	IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
Cooling capacity		45,3	54,5	59,3	69,3	76,5	92,1	102	113	126	143	159	183	204	kW
Total power input		15,1	18,5	20,1	23,5	26,4	31,5	34,9	38,7	43,4	49,1	54,9	62,1	69,5	kW
EER		3	2,94	2,94	2,95	2,9	2,92	2,93	2,92	2,9	2,91	2,89	2,95	2,94	W/W
HRE		3,86	3,76	3,79	3,78	3,77	3,75	3,77	3,78	3,76	3,77	3,75	3,8	3,77	W/W
Water flow rate		2,18	2,63	2,86	3,34	3,68	4,43	4,92	5,45	6,07	6,88	7,64	8,84	9,84	l/s
Water pressure drop		41	59	57	53	48	50	47	46	49	48	49	51	53	kPa
Heating recovery capacity		13	15,2	17	19,4	22,9	26,2	29,2	33,2	37,1	42,4	47,5	52,4	58,1	kW
Water flow rate recovery		0,62	0,73	0,81	0,93	1,09	1,25	1,4	1,59	1,77	2,03	2,27	2,5	2,78	l/s
Water pressure drop recovery		6	8	10	13	18	14	17	10	13	17	21	16	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	13,9	16,9	18,4	21,4	25,3	27,9	31,1	35	40	44,4	49,9	55,3	62,1	kW
	EER	3,36	3,25	3,28	3,31	3,2	3,36	3,29	3,25	3,29	3,25	3,26	3,35	3,32	W/W
	HRE	7,67	7,46	7,52	7,58	7,35	7,67	7,71	7,52	7,45	7,61	7,47	7,65	7,59	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54	kPa
	Heating recovery capacity	60	71,2	77,8	91,4	105	120	135	148	168	190	210	238	265	kW
	Water flow rate recovery	2,87	3,4	3,72	4,37	5,02	5,73	6,45	7,07	8,03	9,08	10	11,4	12,7	l/s
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	51	52	55	55	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

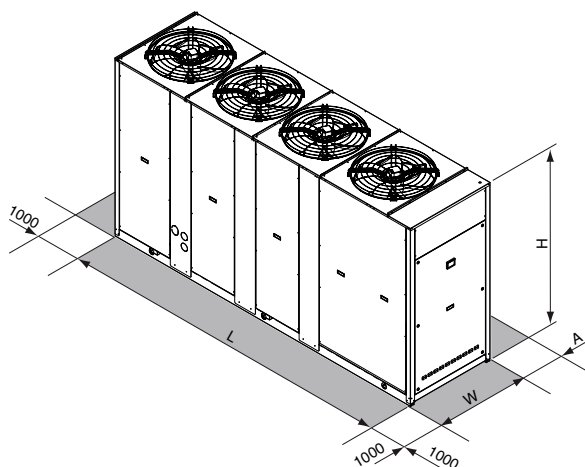

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322			4080	mm
W			954				1104			1104			1104	mm
H			1930				1793			2193			2193	mm
A			1600							2000				mm
Operating maximum weight*	1027	1031	1053	1088	1107	1587	1668	1749	1833	1891	1935	2260	2296	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RGA HE

AIR-WATER CHILLERS AND HEAT PUMPS
FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option for IR),

reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	47,2	55,9	63,1	70,5	83,4	94,9	106	120	133	153	173	197	kW
	Power input	14,9	17,2	19,8	22,1	27,2	31,2	34,6	38,6	42,7	50,0	55,5	64,6	kW
	EER	3,17	3,25	3,19	3,19	3,07	3,04	3,06	3,11	3,11	3,06	3,12	3,05	W/W
	ESEER	4,26	4,26	4,29	4,34	4,12	4,22	4,15	4,32	4,21	4,26	4,22	4,11	W/W
	Water flow rate	2,26	2,69	3,03	3,39	4,00	4,56	5,11	5,78	6,40	7,36	8,31	9,46	l/s
	Pressure drops	24	34	33	41	31	32	34	33	35	35	38	39	kPa
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	45,0	53,3	60,1	67,3	79,5	90,5	101	114	127	146	165	188	kW
	Power input	15,5	17,9	20,6	22,9	27,7	31,9	35,6	39,8	44,3	51,3	57,2	66,3	kW
	EER	2,90	2,98	2,92	2,94	2,87	2,84	2,84	2,86	2,87	2,85	2,88	2,84	W/W
	ESEER	4,05	4,18	4,08	4,12	4,01	4,07	3,98	4,12	4,03	4,10	4,04	3,97	W/W
	Water flow rate	2,16	2,56	2,89	3,23	3,82	4,34	4,87	5,49	6,12	7,02	7,93	9,03	l/s
	Pressure drops	22	31	30	37	28	29	31	30	32	32	35	36	kPa
IR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	44,3	52,4	59,1	66,1	78,2	89,0	100	112	125	143	162	184	kW
	Power input	15,6	18,1	20,8	23,2	27,9	32,3	36,0	40,4	44,9	51,8	57,8	66,9	kW
	EER	2,84	2,90	2,84	2,85	2,80	2,76	2,76	2,77	2,78	2,76	2,80	2,75	W/W
	ESEER	4,21	4,31	4,26	4,28	4,17	4,23	4,13	4,27	4,17	4,26	4,21	4,12	W/W
	Water flow rate	2,12	2,51	2,84	3,18	3,75	4,27	4,78	5,40	6,02	6,88	7,79	8,84	l/s
	Pressure drops	21	30	29	36	27	28	30	29	31	31	33	34	kPa
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	45,3	53,6	60,7	67,8	81,3	92,4	103	115	128	147	166	191	kW
	Power input	14,6	17,1	19,4	21,7	26,7	30,2	33,8	37,8	41,8	48,5	54,3	62,8	kW
	EER	3,10	3,13	3,13	3,12	3,04	3,06	3,05	3,04	3,06	3,03	3,06	3,04	W/W
	ESEER	4,17	4,24	4,22	4,23	4,10	4,23	4,11	4,23	4,14	4,21	4,12	4,10	W/W
	Water flow rate	2,17	2,58	2,91	3,26	3,90	4,43	4,97	5,54	6,16	7,07	7,98	9,17	l/s
	Pressure drops	22	31	30	38	29	30	32	30	32	32	35	37	kPa
A7W45	Heating capacity	49,4	58,3	66,0	74,1	88,4	100	113	126	141	161	181	207	kW
	Power input	15,5	18,1	20,8	23,4	27,9	31,6	35,5	39,7	44,3	51,0	57,1	65,6	kW
	COP	3,19	3,22	3,17	3,17	3,17	3,16	3,18	3,17	3,18	3,16	3,17	3,16	W/W
	Water flow rate	2,35	2,77	3,13	3,52	4,20	4,77	5,35	5,97	6,69	7,64	8,60	9,84	l/s
	Pressure drops	26	36	35	44	34	35	37	35	38	38	41	42	kPa
IP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	43,2	51,1	57,8	64,6	77,5	88,0	98,6	110	122	140	158	182	kW
	Power input	15,1	17,7	20,1	22,6	27,1	31,0	34,8	39,0	43,3	49,8	56,1	64,4	kW
	EER	2,86	2,89	2,88	2,86	2,86	2,84	2,83	2,82	2,82	2,81	2,82	2,83	W/W
	ESEER	3,95	4,02	4,02	4,01	3,98	4,08	3,96	4,03	3,95	4,05	3,95	3,95	W/W
	Water flow rate	2,07	2,45	2,78	3,11	3,72	4,22	4,73	5,26	5,88	6,74	7,60	8,74	l/s
	Pressure drops	20	28	28	35	27	27	29	27	30	29	32	33	kPa
A7W45	Heating capacity	48,1	56,8	64,2	72,2	86,0	97,7	110	123	137	157	176	202	kW
	Power input	14,9	17,5	20,0	22,7	26,4	30,1	34,0	38,2	42,8	48,8	54,8	62,7	kW
	COP	3,23	3,25	3,21	3,18	3,26	3,25	3,24	3,22	3,20	3,22	3,21	3,22	W/W
	Water flow rate	2,29	2,70	3,05	3,43	4,09	4,64	5,21	5,83	6,50	7,45	8,36	9,60	l/s
	Pressure drops	25	34	33	42	32	33	35	34	36	36	38	40	kPa
IP	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	42,5	50,3	56,9	63,6	76,2	86,5	97,0	109	120	138	155	179	kW
	Power input	15,3	18,0	20,3	22,8	27,4	31,4	35,2	39,6	44,0	50,2	56,7	65,0	kW
	EER	2,78	2,79	2,80	2,79	2,78	2,75	2,76	2,75	2,73	2,75	2,73	2,75	W/W
	ESEER	4,11	4,16	4,17	4,17	4,14	4,23	4,10	4,21	4,10	4,23	4,10	4,12	W/W
	Water flow rate	2,04	2,41	2,73	3,05	3,66	4,15	4,65	5,21	5,78	6,64	7,45	8,60	l/s
	Pressure drops	20	27	27	33	26	27	28	27	29	28	31	32	kPa
A7W45	Heating capacity	47,6	56,1	63,4	71,3	85,0	96,5	109	121	136	155	174	199	kW
	Power input	14,7	17,2	19,6	22,2	25,9	29,5	33,3	37,4	42,0	47,7	53,6	61,3	kW
	COP	3,24	3,26	3,23	3,21	3,28	3,27	3,27	3,24	3,24	3,25	3,25	3,25	W/W
	Water flow rate	2,26	2,67	3,01	3,38	4,04	4,59	5,16	5,73	6,45	7,36	8,27	9,46	l/s
	Pressure drops	24	33	33	41	32	32	35	32	36	35	38	39	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.
A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level ^(E)	82	82	83	84	85	85	85	85	86	87	87	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	67	67	67	67	68	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	58	58	58	58	59	60	60	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	53	53	53	53	54	55	55	56	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level ^(E)	79	79	80	81	82	82	82	82	83	84	84	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	64	64	64	64	65	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	55	55	55	55	56	57	57	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	50	50	50	50	51	52	52	53	dB(A)
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level ^(E)	77	77	78	79	80	80	80	80	81	82	82	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	62	62	62	62	63	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	53	53	53	53	54	55	55	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	48	48	48	48	49	50	50	51	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Power supply	400 - 3+N - 50				400 - 3 - 50								V-ph-Hz
Compressor type	scroll												-
N° compressors / N° refrigerant circuits	2 / 1												n°
Plant side heat exchanger type	stainless steel brazed plates												-
Source side heat exchanger type	finned coil												-
Fans type	axial												-
N° fans	2	3		2				3		4			n°
Tank volume	200				400				460				l
Hydraulic fittings	2" VICTAULIC				2" 1/2 VICTAULIC								-

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
FLA - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	A
FLI - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	kW
MIC - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	A
Unit with high head modulating pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
FLA - Full load current at maximum tolerated conditions	46,3	51,8	59,4	64,8	76,0	81,6	96,1	107	115	132	147	169	A
FLI - Full load power input at maximum tolerated conditions	25,1	27,9	31,9	34,5	42,1	47,5	58,5	65,1	70,6	80,3	89,6	102	kW
MIC - Maximum instantaneous current of the unit	140	150	155	179	219	270	265	276	276	357	372	365	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	95,4	102	107	123	150	180	181	192	192	209	257	258	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-15	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7 - W45	Cooling capacity	49,1	58,1	65,5	73,3	86,7	98,6	110	125	138	159	180	205	kW
	Total power input	14,5	16,7	19,4	21,5	26,6	30,5	33,8	37,7	41,6	48,8	54,1	63,1	kW
	EER	3,38	3,47	3,38	3,41	3,26	3,24	3,27	3,32	3,32	3,26	3,32	3,24	W/W
	HRE	4,36	4,48	4,36	4,4	4,21	4,18	4,22	4,28	4,29	4,21	4,29	4,19	W/W
	Water flow rate	2,36	2,79	3,15	3,53	4,17	4,74	5,3	6,02	6,64	7,64	8,65	9,84	l/s
	Water pressure drop	26	37	36	44	34	35	37	36	38	38	41	42	kPa
	Heating recovery capacity	14,2	16,9	19	21,3	25,1	28,6	32,1	36,2	40,3	46,3	52,3	59,4	kW
	Water flow rate recovery	0,68	0,81	0,91	1,02	1,2	1,37	1,53	1,73	1,93	2,21	2,5	2,84	l/s
	Water pressure drop recovery	7	10	13	16	21	16	20	12	15	20	25	20	kPa
	IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2
A35W7 - W45	Cooling capacity	47,1	55,8	63,1	70,4	84,6	96	107	120	133	153	173	199	kW
	Total power input	14,2	16,6	18,9	21,2	26	29,5	33	36,8	40,7	47,3	53,1	61,4	kW
	EER	3,32	3,36	3,33	3,33	3,25	3,25	3,25	3,27	3,27	3,24	3,26	3,24	W/W
	HRE	4,28	4,34	4,3	4,3	4,19	4,2	4,2	4,21	4,22	4,18	4,2	4,17	W/W
	Water flow rate	2,26	2,68	3,03	3,39	4,06	4,61	5,16	5,78	6,4	7,36	8,31	9,56	l/s
	Water pressure drop	24	34	33	41	32	33	35	33	35	35	38	40	kPa
	Heating recovery capacity	13,6	16,2	18,3	20,5	24,5	27,9	31,1	34,7	38,6	44,4	50,1	57,5	kW
	Water flow rate recovery	0,65	0,77	0,87	0,98	1,17	1,33	1,49	1,66	1,84	2,12	2,39	2,75	l/s
	Water pressure drop recovery	7	9	12	14	20	16	19	11	14	18	23	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7 - W45	Cooling capacity	49,1	58,1	65,5	73,3	86,7	98,6	110	125	138	159	180	205	kW
	Total power input	13,2	15,4	17,4	19,5	22,8	26,6	29,9	33,7	37,7	43	48,2	55,4	kW
	EER	3,72	3,76	3,77	3,75	3,81	3,72	3,7	3,71	3,66	3,7	3,73	3,7	W/W
	HRE	8,39	8,47	8,49	8,46	8,55	8,39	8,35	8,37	8,27	8,36	8,42	8,34	W/W
	Water flow rate	2,36	2,79	3,15	3,53	4,17	4,74	5,3	6,02	6,64	7,64	8,65	9,84	l/s
	Water pressure drop	26	37	36	44	34	35	37	36	38	38	41	42	kPa
	Heating recovery capacity	61,7	72,7	82,1	91,9	108	124	139	157	174	200	226	257	kW
	Water flow rate recovery	2,95	3,47	3,92	4,39	5,16	5,92	6,64	7,5	8,31	9,56	10,8	12,3	l/s
	Water pressure drop recovery	34	47	42	41	48	47	52	49	51	50	54	53	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

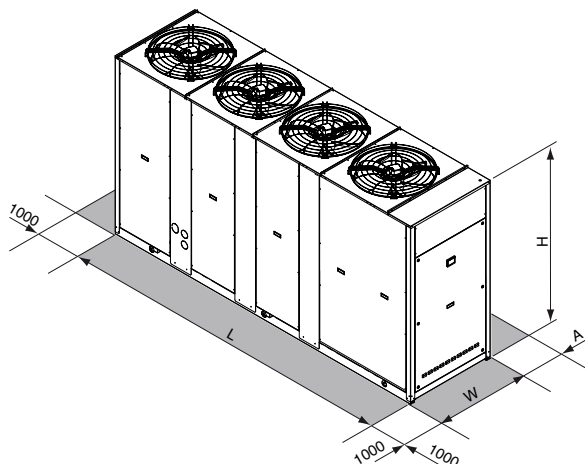

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
L	2480			3322			3322			4080			mm
W	954			1104			1104			1104			mm
H	1930			1793			2193			2193			mm
A	1600			2000			2000			2000			mm
Operating maximum weight*	1068	1072	1095	1132	1569	1650	1735	1877	1906	1967	2292	2350	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RGA ST

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version (with plate heat exchanger)
VR	Total recovery version (with plate heat exchanger)

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, shell and tube heat exchanger with threaded or vicia fittings (according to the model),

thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option for IR), reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the heat exchanger. The heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing module available in the configurations :

- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Outdoor air sensor

Water flow switch

Vicia hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	45,0	53,0	58,1	68,2	78,1	90,3	101	111	125	142	157	179	198	kW
	Power input	15,7	18,8	20,8	24,1	28,0	32,5	35,9	39,9	45,1	51,5	57,1	64,6	71,6	kW
	EER	2,87	2,82	2,79	2,83	2,79	2,78	2,81	2,78	2,77	2,76	2,75	2,77	2,77	W/W
	ESEER	3,93	3,90	3,85	3,91	3,84	3,93	3,86	3,93	3,82	3,89	3,77	3,80	3,82	W/W
	Water flow rate	2,16	2,56	2,80	3,29	3,76	4,35	4,87	5,35	6,02	6,83	7,55	8,60	9,56	l/s
	Pressure drops	23	33	28	38	49	43	54	65	45	57	69	48	59	kPa
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,6	51,5	56,3	66,2	75,7	87,6	97,8	108	121	138	152	174	193	kW
	Power input	16,3	19,4	21,6	24,9	29,2	33,7	37,3	41,4	46,8	53,4	59,2	67,0	74,3	kW
	EER	2,67	2,65	2,61	2,66	2,59	2,60	2,62	2,61	2,59	2,58	2,57	2,60	2,60	W/W
	ESEER	3,81	3,79	3,74	3,80	3,70	3,81	3,73	3,83	3,69	3,79	3,66	3,69	3,70	W/W
	Water flow rate	2,10	2,48	2,71	3,19	3,65	4,21	4,71	5,21	5,83	6,64	7,31	8,36	9,27	l/s
	Pressure drops	22	31	26	36	44	41	50	60	42	54	65	45	55	kPa
IR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	42,7	50,3	55,1	64,7	74,0	85,6	95,6	105	118	134	149	169	188	kW
	Power input	16,3	19,8	22,1	25,4	29,9	32,8	38,3	42,6	48,1	54,3	60,3	68,8	76,2	kW
	EER	2,62	2,54	2,49	2,55	2,47	2,61	2,50	2,46	2,45	2,47	2,47	2,46	2,47	W/W
	ESEER	3,96	3,88	3,80	3,89	3,76	4,09	3,79	3,86	3,74	3,86	3,76	3,73	3,75	W/W
	Water flow rate	2,05	2,42	2,65	3,12	3,56	4,12	4,60	5,06	5,69	6,45	7,17	8,12	9,03	l/s
	Pressure drops	21	30	25	34	44	39	48	58	41	52	63	42	52	kPa
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,5	52,4	57,0	66,7	73,6	88,5	98	109	121	137	153	177	196	kW
	Power input	15,5	19,0	20,7	24,1	27,0	32,3	35,7	39,8	44,5	50,3	56,3	63,5	71,2	kW
	EER	2,81	2,76	2,75	2,77	2,73	2,74	2,75	2,74	2,72	2,72	2,72	2,79	2,75	W/W
	ESEER	3,84	3,82	3,80	3,80	3,73	3,87	3,78	3,87	3,73	3,84	3,72	3,82	3,79	W/W
	Water flow rate	2,09	2,53	2,75	3,21	3,54	4,26	4,73	5,26	5,83	6,59	7,36	8,50	9,46	l/s
	Pressure drops	21	32	27	36	42	43	50	62	42	54	67	46	57	kPa
A7W45	Heating capacity	48,1	58,1	63,2	74,5	83,0	99,6	110	125	136	154	173	197	216	kW
	Power input	15,6	19,1	20,9	24,4	27,6	33,5	35,9	41,1	44,9	51,8	56,9	65,1	71,7	kW
	COP	3,08	3,04	3,02	3,05	3,01	2,97	3,06	3,04	3,03	2,97	3,04	3,03	3,01	W/W
	Water flow rate	2,28	2,75	2,99	3,53	3,93	4,72	5,21	5,92	6,45	7,31	8,17	9,32	10,2	l/s
	Pressure drops	26	38	32	43	52	52	61	77	53	66	82	56	66	kPa
IP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	41,8	50,4	54,8	64,0	70,6	85,0	94,4	105	116	131	147	170	189	kW
	Power input	16,0	20,0	21,8	25,5	28,6	34,1	37,7	42,0	47,0	53,1	59,5	67,1	75,3	kW
	EER	2,61	2,52	2,51	2,51	2,47	2,49	2,50	2,50	2,47	2,47	2,47	2,53	2,51	W/W
	ESEER	3,69	3,60	3,58	3,58	3,52	3,65	3,55	3,67	3,52	3,60	3,52	3,60	3,57	W/W
	Water flow rate	2,01	2,43	2,64	3,08	3,40	4,09	4,54	5,06	5,59	6,31	7,07	8,17	9,08	l/s
	Pressure drops	20	30	25	33	39	39	46	58	39	49	62	43	53	kPa
A7W45	Heating capacity	46,9	56,5	61,7	72,5	80,9	97,0	107	122	133	150	168	192	211	kW
	Power input	14,9	18,2	20,0	23,2	26,4	31,9	34,2	39,2	42,8	49,4	54,3	62,1	68,5	kW
	COP	3,15	3,10	3,09	3,13	3,06	3,04	3,13	3,11	3,11	3,04	3,09	3,09	3,08	W/W
	Water flow rate	2,23	2,68	2,92	3,44	3,83	4,60	5,06	5,78	6,31	7,12	7,98	9,08	9,99	l/s
	Pressure drops	24	36	31	41	49	50	59	75	50	62	78	53	64	kPa
IP	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	41,0	49,3	53,7	62,8	69,3	83,3	92,5	102	114	129	144	166	185	kW
	Power input	17,1	21,1	23,0	26,8	30,1	35,9	39,8	44,3	49,5	56,0	62,7	70,8	79,4	kW
	EER	2,40	2,34	2,33	2,34	2,30	2,32	2,32	2,30	2,30	2,30	2,30	2,34	2,33	W/W
	ESEER	3,62	3,56	3,55	3,55	3,49	3,62	3,53	3,60	3,50	3,60	3,49	3,56	3,53	W/W
	Water flow rate	1,97	2,37	2,58	3,02	3,33	4,00	4,45	4,92	5,49	6,21	6,93	7,98	8,89	l/s
	Pressure drops	19	28	24	32	37	38	44	53	38	47	58	41	50	kPa
A7W45	Heating capacity	45,2	54,5	59,4	70,0	78,0	93,5	104	118	128	145	162	184	203	kW
	Power input	14,2	17,3	19,0	22,2	25,1	30,4	32,7	37,3	40,8	47,1	51,7	59,1	65,1	kW
	COP	3,18	3,15	3,13	3,15	3,11	3,08	3,18	3,16	3,14	3,08	3,13	3,11	3,12	W/W
	Water flow rate	2,15	2,58	2,81	3,32	3,70	4,43	4,92	5,59	6,07	6,88	7,69	8,74	9,60	l/s
Pressure drops	23	34	28	38	47	45	54	69	47	59	73	49	59	kPa	

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	82	82	83	84	84	85	85	85	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	66	67	67	67	68	69	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	57	58	58	58	59	60	60	61	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	79	79	80	81	81	82	82	82	83	84	84	85	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	63	64	64	64	65	66	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	54	55	55	55	56	57	57	58	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	49	50	50	50	51	52	52	53	53	dB(A)
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	77	77	78	79	79	80	80	80	81	82	82	83	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	61	62	62	62	63	64	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	47	48	48	48	49	50	50	51	51	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3+N - 50						400 - 3 - 50						V-ph-Hz	
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Plant side heat exchanger type	shell and tube													-
Source side heat exchanger type	finned coil													-
Fans type	axial													-
N° fans	2	3			2			3	4			n°		
Water volume plant side heat exchanger	9,5	15,3			21,7			29,2	37,8			l		
Hydraulic fittings plant side heat exchanger	2" GAS M			2" ½ GAS M			3" GAS M						-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	170	A
FLI - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	103	kW
MIC - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	391	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	272	A
Unit with high head modulating pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	46,3	51,8	59,4	64,8	76,0	81,6	96,1	107	115	132	147	169	180	A
FLI - Full load power input at maximum tolerated conditions	25,1	27,9	31,9	34,5	42,1	47,5	58,5	65,1	70,6	80,3	89,6	102	109	kW
MIC - Maximum instantaneous current of the unit	140	150	155	179	219	270	265	276	276	357	372	365	402	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	95,4	102	107	123	150	180	181	192	192	209	257	258	282	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	15	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional plate heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat. **The Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	15,3	18,3	20,3	23,4	27,3	31,8	35,1	38,9	44	50,3	55,8	63	69,9	kW
	EER	3,05	3	2,98	3,03	2,97	2,95	2,99	2,96	2,95	2,94	2,92	2,94	2,95	W/W
	HRE	3,93	3,86	3,84	3,88	3,83	3,8	3,86	3,85	3,83	3,81	3,8	3,82	3,83	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	25	36	30	41	52	47	59	69	50	62	76	51	62	kPa
	Heating recovery capacity	13,5	15,7	17,6	20	23,6	27,1	30,4	34,4	38,4	44	49,3	55,4	61,3	kW
	Water flow rate recovery	0,65	0,75	0,84	0,96	1,13	1,29	1,45	1,64	1,83	2,1	2,36	2,65	2,93	l/s
	Water pressure drop recovery	6	9	11	14	19	15	18	11	14	18	22	18	21	kPa
	A35W7 - W45	IP Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
Cooling capacity		45,3	54,5	59,3	69,3	76,5	92,1	102	113	126	143	159	183	204	kW
Total power input		15,1	18,5	20,1	23,5	26,4	31,5	34,9	38,7	43,4	49,1	54,9	62,1	69,5	kW
EER		3	2,94	2,94	2,95	2,9	2,92	2,93	2,92	2,9	2,91	2,89	2,95	2,94	W/W
HRE		3,86	3,76	3,79	3,78	3,77	3,75	3,77	3,78	3,76	3,77	3,75	3,8	3,77	W/W
Water flow rate		2,18	2,63	2,86	3,34	3,68	4,43	4,92	5,45	6,07	6,88	7,64	8,84	9,84	l/s
Water pressure drop		23	35	29	38	47	45	54	67	47	59	73	50	61	kPa
Heating recovery capacity		13	15,2	17	19,4	22,9	26,2	29,2	33,2	37,1	42,4	47,5	52,4	58,1	kW
Water flow rate recovery		0,62	0,73	0,81	0,93	1,09	1,25	1,4	1,59	1,77	2,03	2,27	2,5	2,78	l/s
Water pressure drop recovery		6	8	10	13	18	14	17	10	13	17	21	16	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	13,9	16,9	18,4	21,4	25,3	27,9	31,1	35	40	44,4	49,9	55,3	62,1	kW
	EER	3,36	3,25	3,28	3,31	3,2	3,36	3,38	3,29	3,25	3,33	3,26	3,35	3,32	W/W
	HRE	7,67	7,46	7,52	7,58	7,35	7,67	7,71	7,52	7,45	7,61	7,47	7,65	7,59	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	25	36	30	43	52	50	59	69	50	64	76	52	64	kPa
	Heating recovery capacity	60	71,2	77,8	91,4	105	120	135	148	168	190	210	238	265	kW
	Water flow rate recovery	2,87	3,4	3,72	4,37	5,02	5,73	6,45	7,07	8,03	9,08	10	11,4	12,7	l/s
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	51	52	55	55	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input
A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

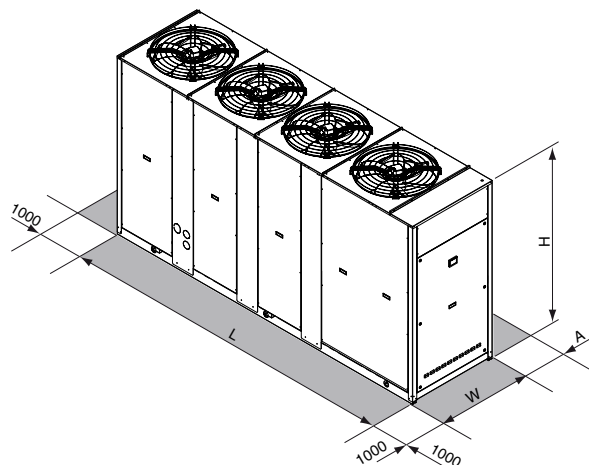

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322			4080	mm
W			954				1104			1104			1104	mm
H			1930				1793			2193			2193	mm
A			1600							2000				mm
Operating maximum weight*	791	793	844	876	893	1197	1278	1414	1465	1522	1561	1784	1812	kg

* Weight refers to the unit IP complete with 2 pumps module without tank.

> RTA

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

- IR Chiller
- IP Heat pump
(reversible on the refrigerant side)
- BR Chiller Brine
- BP Heat pump Brine
(reversible on the refrigerant side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up
- AX eXtra low noise setting up

Source temperature level

- M Medium temperature level
- A High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydra-

tor filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	245.3	280.3	315.3	
A35W7	Cooling capacity	235	277	299	kW
	Power input	87,3	104	111	kW
	EER	2,69	2,66	2,69	W/W
	ESEER	3,81	3,81	3,84	W/W
	Water flow rate	11,3	13,4	14,4	l/s
	Pressure drops	54	60	53	kPa
IR	Low noise setting up (AS)	245.3	280.3	315.3	
A35W7	Cooling capacity	228	270	291	kW
	Power input	92,0	109	116	kW
	EER	2,48	2,48	2,51	W/W
	ESEER	3,66	3,69	3,69	W/W
	Water flow rate	11,0	13,0	14,0	l/s
	Pressure drops	51	57	50	kPa
IR	eXtra low noise setting up (AX)	245.3	280.3	315.3	
A35W7	Cooling capacity	223	264	285	kW
	Power input	94,0	111	118	kW
	EER	2,37	2,38	2,42	W/W
	ESEER	3,74	3,72	3,78	W/W
	Water flow rate	10,8	12,7	13,7	l/s
	Pressure drops	49	54	48	kPa
IP	Base setting up (AB)	245.3	280.3	315.3	
A35W7	Cooling capacity	226	268	289	kW
	Power input	85,3	101	108	kW
	EER	2,65	2,65	2,68	W/W
	ESEER	3,71	3,71	3,75	W/W
	Water flow rate	10,9	12,9	13,9	l/s
	Pressure drops	50	56	49	kPa
A7W45	Heating capacity	252	300	319	kW
	Power input	86,4	102	109	kW
	COP	2,92	2,93	2,93	W/W
	Water flow rate	11,9	14,2	15,1	l/s
Pressure drops	60	67	58	kPa	
IP	Low noise setting up (AS)	245.3	280.3	315.3	
A35W7	Cooling capacity	219	260	280	kW
	Power input	90,0	106	113	kW
	EER	2,43	2,45	2,48	W/W
	ESEER	3,55	3,57	3,60	W/W
	Water flow rate	10,6	12,5	13,5	l/s
	Pressure drops	47	52	47	kPa
A7W45	Heating capacity	242	288	306	kW
	Power input	81,6	96,9	103	kW
	COP	2,97	2,97	2,97	W/W
	Water flow rate	11,5	13,6	14,5	l/s
Pressure drops	56	62	54	kPa	
IP	eXtra low noise setting up (AX)	245.3	280.3	315.3	
A35W7	Cooling capacity	215	255	274	kW
	Power input	92,0	108	116	kW
	EER	2,34	2,36	2,36	W/W
	ESEER	3,64	3,66	3,66	W/W
	Water flow rate	10,4	12,3	13,2	l/s
	Pressure drops	46	51	45	kPa
A7W45	Heating capacity	240	285	302	kW
	Power input	79	94	100	kW
	COP	3,04	3,03	3,02	W/W
	Water flow rate	11,4	13,5	14,3	l/s
Pressure drops	55	61	52	kPa	

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

= Unit in A CLASS.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	245.3	280.3	315.3	
Sound power level ^(E)	90	91	91	dB(A)
Sound pressure level at 1 meter	71	72	72	dB(A)
Sound pressure level at 5 meters	63	64	64	dB(A)
Sound pressure level at 10 meters	58	59	59	dB(A)
Low noise setting up (AS)	245.3	280.3	315.3	
Sound power level ^(E)	86	87	87	dB(A)
Sound pressure level at 1 meter	67	68	68	dB(A)
Sound pressure level at 5 meters	59	60	60	dB(A)
Sound pressure level at 10 meters	54	55	55	dB(A)
eXtra low noise setting up (AX)	245.3	280.3	315.3	
Sound power level ^(E)	84	85	85	dB(A)
Sound pressure level at 1 meter	65	66	66	dB(A)
Sound pressure level at 5 meters	57	58	58	dB(A)
Sound pressure level at 10 meters	52	53	53	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	245.3	280.3	315.3	
Power supply		400 - 3 - 50		V-ph-Hz
Compressor type		scroll		-
N° compressors / N° refrigerant circuits		3 / 1		n°
Plant side heat exchanger type		stainless steel brazed plates		-
Source side heat exchanger type		finned coil		-
Fans type		axial		-
N° fans	4		5	n°
Tank volume		460		l
Hydraulic fittings		3" VICTAULIC		-

Electrical data

Standard unit	245.3	280.3	315.3	
FLA - Full load current at maximum tolerated conditions	199	231	247	A
FLI - Full load power input at maximum tolerated conditions	121	137	148	kW
MIC - Maximum instantaneous current of the unit	425	428	470	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	311	313	351	A
Unit with high head modulating pump	245.3	280.3	315.3	
FLA - Full load current at maximum tolerated conditions	213	245	261	A
FLI - Full load power input at maximum tolerated conditions	130	146	157	kW
MIC - Maximum instantaneous current of the unit	439	442	483	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	324	327	364	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	50	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	25	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	245.3	280.3	315.3	
A35W7 - W45	Cooling capacity	244	288	311	kW
	Total power input	85,3	101,0	107,6	kW
	EER	2,86	2,85	2,89	W/W
	HRE	3,77	3,75	3,80	W/W
	Water flow rate	11,8	13,9	15,0	l/s
	Water pressure drop	59	65	57	kPa
	Heating recovery capacity	77,3	90,8	97,7	kW
	Water flow rate recovery	3,69	4,34	4,67	l/s
	Water pressure drop recovery	30	19	20	kPa

IP	Base setting up (AB)	245.3	280.3	315.3	
A35W7 - W45	Cooling capacity	235	278	300	kW
	Total power input	83,2	98,7	105,2	kW
	EER	2,82	2,82	2,85	W/W
	HRE	3,73	3,72	3,76	W/W
	Water flow rate	11,3	13,4	14,5	l/s
	Water pressure drop	54	60	54	kPa
	Heating recovery capacity	75,5	88,7	95,5	kW
	Water flow rate recovery	3,61	4,24	4,56	l/s
	Water pressure drop recovery	29	18	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	245.3	280.3	315.3	
A35W7 - W45	Cooling capacity	246	291	314	kW
	Total power input	77,4	91,2	97,7	kW
	EER	3,19	3,19	3,21	W/W
	HRE	7,32	7,34	7,38	W/W
	Water flow rate	11,9	14,0	15,2	l/s
	Water pressure drop	60	66	59	kPa
	Heating recovery capacity	320	378	407	kW
	Water flow rate recovery	15,3	18,1	19,4	l/s
	Water pressure drop recovery	51	55	68	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

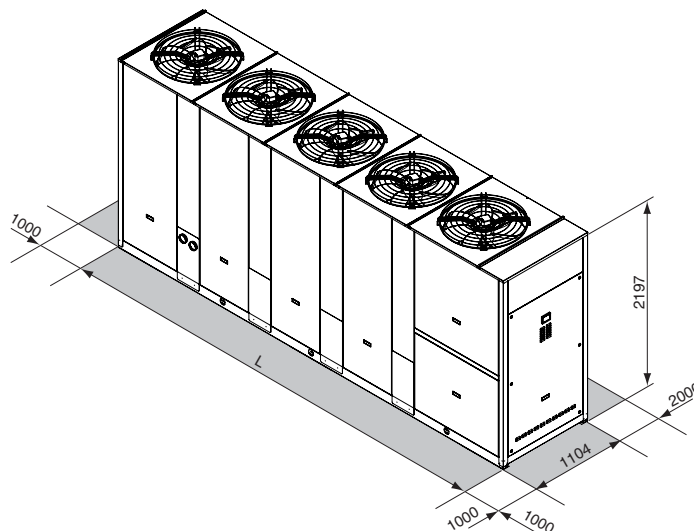

	245.3	280.3	315.3	
L		5020		mm
Operating maximum weight*	2663	2744	2841	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RLA

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes

and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

[Storing and pumping module](#) available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump

[Refrigerant circuit pressures visualization](#)

- high and low pressure gauges
- high and low pressure transducers

[High temperature thermostat](#)

[Compressor starting](#)

- standard (contactors)
- soft starter

[Fans control](#)

- on-off control
- modulating control (condensation / evaporation control)

[Compressor power factor correction](#)

[Electrical load protection](#)

- fuses
- thermal magnetic circuit breakers

[Coil condensate tray](#)

Accessories

[Rubber vibration dampers](#)

[Spring vibration dampers](#)

[Coil protection grilles](#)

[Tank antifreeze electrical heater](#)

[Remote control](#)

[Modbus serial interface on RS485](#)

[Programmer clock](#)

[Phase sequence and voltage controller](#)

[Water flow switch](#)

[Victaulic hydraulic fittings](#)

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	161	178	199	228	255	289	323	368	409	kW	
	Power input	56,2	62,7	70,9	80,4	90,7	103	115	130	146	kW	
	EER	2,86	2,84	2,81	2,84	2,81	2,81	2,81	2,81	2,83	2,80	W/W
	ESEER	3,84	3,81	3,79	3,82	3,79	3,80	3,79	3,80	3,80	3,79	W/W
	Water flow rate	7,74	8,55	9,60	11,0	12,3	14,0	15,6	17,7	19,7	l/s	
	Pressure drops	51	51	58	57	60	64	54	58	58	kPa	
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	155	171	191	219	245	277	311	353	393	kW	
	Power input	59,2	66,1	75,0	85,2	95,5	109	121	137	154	kW	
	EER	2,62	2,59	2,55	2,57	2,57	2,54	2,57	2,58	2,55	W/W	
	ESEER	3,85	3,80	3,77	3,80	3,79	3,76	3,78	3,80	3,76	W/W	
	Water flow rate	7,45	8,22	9,22	10,6	11,8	13,4	15,0	17,0	18,9	l/s	
	Pressure drops	47	47	53	53	56	58	50	53	54	kPa	
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	151	167	187	214	240	272	304	346	385	kW	
	Power input	59,8	66,9	76,0	86,4	96,6	111	123	138	157	kW	
	EER	2,53	2,50	2,46	2,48	2,48	2,45	2,47	2,51	2,45	W/W	
	ESEER	3,90	3,85	3,82	3,84	3,86	3,82	3,82	3,88	3,81	W/W	
	Water flow rate	7,26	8,03	9,03	10,3	11,6	13,1	14,6	16,7	18,5	l/s	
	Pressure drops	45	45	51	50	54	56	47	51	51	kPa	
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	154	171	192	215	244	275	310	357	397	kW	
	Power input	55,4	61,8	69,6	78,5	89,9	102	113	129	144	kW	
	EER	2,78	2,77	2,76	2,74	2,71	2,70	2,74	2,77	2,76	W/W	
	ESEER	3,72	3,70	3,72	3,68	3,65	3,65	3,66	3,72	3,73	W/W	
	Water flow rate	7,41	8,22	9,27	10,4	11,8	13,3	14,9	17,2	19,2	l/s	
	Pressure drops	47	47	54	51	56	57	49	54	55	kPa	
A7W45	Heating capacity	169	191	215	240	273	308	345	395	439	kW	
	Power input	56,8	64,0	72,3	81,2	92,7	104	116	132	147	kW	
	COP	2,98	2,98	2,97	2,96	2,94	2,96	2,97	2,99	2,99	W/W	
	Water flow rate	8,03	9,03	10,2	11,4	12,9	14,6	16,3	18,7	20,8	l/s	
Pressure drops	55	57	65	62	66	69	59	64	65	kPa		
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	148	164	185	206	234	265	298	343	382	kW	
	Power input	58,3	65,2	73,6	86,4	94,7	107	123	136	152	kW	
	EER	2,54	2,52	2,51	2,38	2,47	2,48	2,42	2,52	2,51	W/W	
	ESEER	3,72	3,69	3,69	3,51	3,64	3,63	3,55	3,73	3,70	W/W	
	Water flow rate	7,12	7,88	8,89	9,94	11,3	12,8	14,3	16,5	18,4	l/s	
	Pressure drops	43	44	49	47	51	53	45	50	51	kPa	
A7W45	Heating capacity	162	183	206	230	262	296	331	379	422	kW	
	Power input	53,5	60,3	68,2	76,6	87,3	99	110	125	140	kW	
	COP	3,03	3,03	3,02	3,00	3,00	2,99	3,01	3,03	3,01	W/W	
	Water flow rate	7,69	8,65	9,75	10,9	12,4	14,0	15,7	17,9	20,0	l/s	
Pressure drops	50	52	59	56	61	64	54	59	60	kPa		
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	145	161	181	203	229	259	291	335	374	kW	
	Power input	59,0	66,1	74,6	84,4	95,8	109	122	137	153	kW	
	EER	2,46	2,44	2,43	2,41	2,39	2,38	2,39	2,45	2,44	W/W	
	ESEER	3,79	3,75	3,75	3,71	3,70	3,69	3,69	3,79	3,77	W/W	
	Water flow rate	6,98	7,74	8,70	9,75	11,0	12,5	14,0	16,1	18,0	l/s	
	Pressure drops	42	42	47	45	48	51	43	48	49	kPa	
A7W45	Heating capacity	161	181	204	228	259	293	328	374	417	kW	
	Power input	51,8	58,5	66,2	74,5	84,6	95,6	106	121	135	kW	
	COP	3,11	3,09	3,08	3,06	3,06	3,06	3,09	3,09	3,09	W/W	
	Water flow rate	7,64	8,60	9,65	10,8	12,3	13,9	15,5	17,7	19,7	l/s	
Pressure drops	50	52	58	55	60	63	53	58	58	kPa		

Data declared according to EN 14511. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level ^(E)	91	92	92	92	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level ^(E)	85	86	86	86	87	88	88	89	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level ^(E)	82	83	83	83	84	85	85	86	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	54	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Power supply	400 - 3 - 50									V-ph-Hz
Compressor type	scroll									-
N° compressors / N° refrigerant circuits	4 / 2									n°
Plant side heat exchanger type	stainless steel brazed plates									-
Source side heat exchanger type	finned coil									-
Fans type	axial									-
N° fans	4			6			8			n°
Tank volume	325						710			l
Hydraulic fittings	3" VICTAULIC						4" VICTAULIC			-

Electrical data

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
FLA - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	335	A
FLI - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	200	kW
MIC - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	558	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	438	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
FLA - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	357	A
FLI - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	212	kW
MIC - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	580	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	460	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	167	185	207	237	264	300	336	382	425	kW
	Total power input	55,0	61,2	69,3	78,5	88,7	101	112	127	143	kW
	EER	3,04	3,01	2,99	3,02	2,98	2,97	3,00	3,01	2,98	W/W
	HRE	3,90	3,89	3,87	3,91	3,85	3,85	3,90	3,88	3,86	W/W
	Water flow rate	8,05	8,89	10,0	11,4	12,8	14,5	16,2	18,4	20,5	l/s
	Water pressure drop	55	55	63	62	65	68	58	62	63	kPa
	Heating recovery capacity	47,2	53,4	61,2	70,3	76,6	88,7	99,9	110,8	126,6	kW
	Water flow rate recovery	2,25	2,55	2,93	3,36	3,66	4,24	4,77	5,29	6,05	l/s
	Water pressure drop recovery	5	7	8	10	13	16	16	21	25	kPa

IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	160	177	200	224	253	286	322	371	413	kW
	Total power input	54,1	60,4	67,9	76,6	87,8	99	111	126	140	kW
	EER	2,96	2,94	2,94	2,92	2,89	2,88	2,91	2,95	2,96	W/W
	HRE	3,82	3,81	3,83	3,82	3,75	3,76	3,81	3,83	3,85	W/W
	Water flow rate	7,70	8,55	9,64	10,8	12,2	13,8	15,5	17,9	19,9	l/s
	Water pressure drop	51	51	58	55	59	62	53	59	59	kPa
	Heating recovery capacity	46,5	52,7	60,1	68,8	76,1	87,5	98,9	110	124	kW
	Water flow rate recovery	2,22	2,52	2,87	3,29	3,64	4,18	4,73	5,25	5,91	l/s
	Water pressure drop recovery	5	6	8	10	13	16	16	20	24	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	169	186	209	239	267	303	339	386	429	kW
	Total power input	47,3	53,5	61,6	70,7	77,2	89,5	100	111	127	kW
	EER	3,56	3,48	3,39	3,38	3,46	3,39	3,38	3,46	3,37	W/W
	HRE	8,08	7,91	7,75	7,71	7,87	7,72	7,71	7,87	7,69	W/W
	Water flow rate	8,13	8,98	10,1	11,5	12,9	14,6	16,4	18,6	20,7	l/s
	Water pressure drop	56	57	64	63	66	69	59	64	64	kPa
	Heating recovery capacity	214	237	268	306	340	388	434	492	550	kW
	Water flow rate recovery	10,2	11,3	12,8	14,6	16,2	18,5	20,7	23,5	26,3	l/s
	Water pressure drop recovery	45	43	45	45	47	49	49	51	51	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

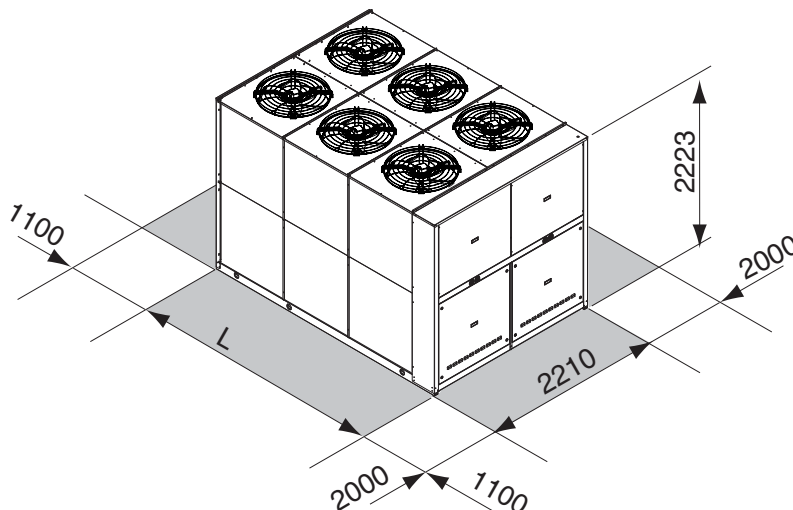

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
L	3164	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2441	2633	2829	3005	3069	3096	3790	3907	3980	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RLA HE

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes

and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump

Refrigerant circuit pressures visualization

- high and low pressure gauges
- high and low pressure transducers

High temperature thermostat

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
 - thermal magnetic circuit breakers
- #### Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	172	191	212	237	267	304	340	387	kW
	Power input	52,7	58,0	65,4	74,1	83,6	95	106	122	kW
	EER	3,26	3,29	3,24	3,20	3,19	3,20	3,21	3,17	W/W
	ESEER	4,57	4,61	4,54	4,48	4,47	4,48	4,49	4,44	W/W
	Water flow rate	8,22	9,13	10,13	11,3	12,8	14,5	16,2	18,5	l/s
	Pressure drops	39	36	38	39	40	36	36	33	kPa
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	165	183	204	228	256	292	326	372	kW
	Power input	55,6	61,4	69,4	78,8	88,3	100,7	113	130	kW
	EER	2,97	2,98	2,94	2,89	2,90	2,90	2,89	2,86	W/W
	ESEER	4,57	4,59	4,53	4,46	4,46	4,47	4,45	4,41	W/W
	Water flow rate	7,88	8,74	9,75	10,9	12,2	14,0	15,6	17,8	l/s
	Pressure drops	36	33	35	36	36	33	34	31	kPa
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	162	180	199	223	251	286	320	364	kW
	Power input	56,3	62,2	70,4	80,1	89,4	102	114	132	kW
	EER	2,88	2,89	2,83	2,78	2,81	2,80	2,82	2,77	W/W
	ESEER	4,66	4,69	4,58	4,51	4,55	4,53	4,56	4,48	W/W
	Water flow rate	7,74	8,60	9,51	10,7	12,0	13,7	15,3	17,4	l/s
	Pressure drops	34	32	33	35	35	32	32	29	kPa
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	169	187	208	234	266	301	339	385	kW
	Power input	52,7	58,0	65,3	73,3	83,2	94,0	106	121	kW
	EER	3,22	3,23	3,19	3,19	3,20	3,20	3,20	3,18	W/W
	ESEER	4,50	4,52	4,46	4,47	4,48	4,48	4,48	4,45	W/W
	Water flow rate	8,09	8,95	9,94	11,2	12,7	14,4	16,2	18,4	l/s
	Pressure drops	38	35	36	38	39	35	36	33	kPa
A7W45	Heating capacity	176	196	218	242	279	316	351	401	kW
	Power input	52,6	59,9	66,7	74,6	85,9	97	107	124	kW
	COP	3,34	3,28	3,27	3,24	3,25	3,26	3,28	3,23	W/W
	Water flow rate	8,39	9,37	10,4	11,6	13,3	15,1	16,8	19,2	l/s
	Pressure drops	41	38	40	41	43	39	39	36	kPa
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	163	180	200	225	255	289	325	370	kW
	Power input	55,6	61,4	69,2	77,9	87,9	99,6	113	129	kW
	EER	2,93	2,93	2,89	2,89	2,90	2,90	2,88	2,87	W/W
	ESEER	4,51	4,51	4,45	4,45	4,47	4,47	4,44	4,42	W/W
	Water flow rate	7,79	8,60	9,56	10,75	12,2	13,8	15,5	17,7	l/s
	Pressure drops	35	32	34	35	36	32	33	30	kPa
A7W45	Heating capacity	169	188	209	232	268	303	337	385	kW
	Power input	49,6	56,5	63,0	70,5	81,0	91,3	101	117	kW
	COP	3,41	3,33	3,32	3,29	3,31	3,32	3,35	3,29	W/W
	Water flow rate	8,07	8,98	9,99	11,1	12,8	14,5	16,1	18,4	l/s
	Pressure drops	37	35	37	37	40	36	36	33	kPa
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7	Cooling capacity	159	176	196	220	250	283	319	362	kW
	Power input	56,3	62,2	70,3	79,2	89,0	101	114	131	kW
	EER	2,82	2,83	2,79	2,78	2,81	2,80	2,81	2,77	W/W
	ESEER	4,58	4,58	4,52	4,50	4,55	4,54	4,55	4,49	W/W
	Water flow rate	7,60	8,41	9,36	10,51	11,9	13,5	15,2	17,3	l/s
	Pressure drops	33	31	32	34	34	31	32	29	kPa
A7W45	Heating capacity	167	186	207	230	265	300	333	381	kW
	Power input	48,0	54,8	61,1	68,5	78,4	89	98	113	kW
	COP	3,48	3,39	3,39	3,36	3,38	3,39	3,40	3,39	W/W
	Water flow rate	7,98	8,89	9,89	11,0	12,7	14,3	15,9	18,2	l/s
Pressure drops	37	34	36	37	39	35	35	32	kPa	

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level ^(E)	91	92	92	92	93	94	94	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level ^(E)	85	86	86	86	87	88	88	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
Sound power level ^(E)	82	83	83	83	84	85	85	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4		
Power supply	400 - 3 - 50								V-ph-Hz	
Compressor type	scroll								-	
N° compressors / N° refrigerant circuits	4 / 2								n°	
Plant side heat exchanger type	stainless steel brazed plates								-	
Source side heat exchanger type	finned coil								-	
Fans type	axial								-	
N° fans	4			6			8		n°	
Tank volume	325					710				l
Hydraulic fittings	3" VICTAULIC						4" VICTAULIC			-

Electrical data

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
FLA - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	A
FLI - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	kW
MIC - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
FLA - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	A
FLI - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	kW
MIC - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-15	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	177	197	218	244	275	312	350	398	kW
	Total power input	53,1	58,5	66,1	74,7	84,5	96	106	123	kW
	EER	3,33	3,36	3,30	3,27	3,25	3,24	3,29	3,22	W/W
	HRE	4,18	4,22	4,17	4,15	4,10	4,11	4,17	4,09	W/W
	Water flow rate	8,55	9,49	10,5	11,8	13,3	15,1	16,9	19,2	l/s
	Water pressure drop	62	63	69	66	71	74	63	68	kPa
	Heating recovery capacity	45,0	50,3	57,6	66,2	72,0	83,4	94,0	107	kW
	Water flow rate recovery	2,15	2,40	2,75	3,16	3,44	3,98	4,49	5,11	l/s
	Water pressure drop recovery	5	6	8	10	12	16	20	26	kPa

IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	174	193	214	241	274	309	349	396	kW
	Total power input	53,0	58,4	65,9	73,8	84,1	95	106	122	kW
	EER	3,29	3,31	3,25	3,26	3,25	3,25	3,28	3,23	W/W
	HRE	4,14	4,17	4,12	4,15	4,11	4,12	4,16	4,10	W/W
	Water flow rate	8,42	9,31	10,34	11,6	13,2	15,0	16,8	19,1	l/s
	Water pressure drop	60	61	67	64	70	73	62	67	kPa
	Heating recovery capacity	45,0	50,3	57,5	65,4	71,6	82,3	94,0	106	kW
	Water flow rate recovery	2,15	2,40	2,75	3,12	3,42	3,93	4,49	5,06	l/s
	Water pressure drop recovery	5	6	8	10	12	16	20	26	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
A35W7 - W45	Cooling capacity	179	198	220	246	277	315	353	402	kW
	Total power input	45,5	50,8	58,4	66,9	73,1	84,8	95	108	kW
	EER	3,93	3,91	3,77	3,68	3,79	3,72	3,72	3,72	W/W
	HRE	8,81	8,77	8,50	8,32	8,54	8,39	8,40	8,38	W/W
	Water flow rate	8,63	9,58	10,6	11,9	13,4	15,3	17,1	19,4	l/s
	Water pressure drop	64	64	70	67	72	76	65	69	kPa
	Heating recovery capacity	222	247	276	310	347	396	444	505	kW
	Water flow rate recovery	10,6	11,8	13,2	14,8	16,6	18,9	21,2	24,1	l/s
	Water pressure drop recovery	49	47	48	47	49	51	51	53	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

CONTROL SYSTEM


The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode

- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

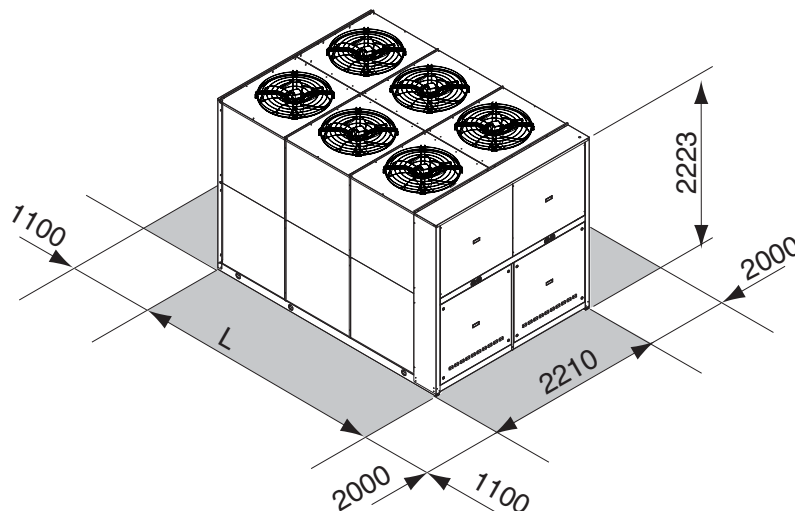

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	
L	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2512	2712	2957	3122	3214	3787	3948	4046	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RLA ST

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version (with plate heat exchanger)
VR	Total recovery version (with plate heat exchanger)

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium-large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, shell and tube heat exchanger with threaded or victaulic fittings (according to the model),

electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the heat exchanger. The heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing module available in the configurations :

- 1 or 2 pumps
- standard or high head pump
- Refrigerant circuit pressures visualization
- high and low pressure gauges
- high and low pressure transducers

High temperature thermostat

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	161	178	199	228	255	289	323	368	409	kW	
	Power input	56,2	62,7	70,9	80,4	90,7	103	115	130	146	kW	
	EER	2,86	2,84	2,81	2,84	2,81	2,81	2,81	2,81	2,83	2,80	W/W
	ESEER	3,84	3,81	3,79	3,82	3,79	3,80	3,79	3,80	3,80	3,79	W/W
	Water flow rate	7,74	8,55	9,60	11,0	12,3	14,0	15,6	17,7	19,7	l/s	
	Pressure drops	50	61	36	46	56	52	31	37	48	kPa	
IR	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	155	171	191	219	245	277	311	353	393	kW	
	Power input	59,2	66,1	75,0	85,2	95,5	109	121	137	154	kW	
	EER	2,62	2,59	2,55	2,57	2,57	2,54	2,57	2,58	2,55	W/W	
	ESEER	3,85	3,80	3,77	3,80	3,79	3,76	3,78	3,80	3,76	W/W	
	Water flow rate	7,45	8,22	9,22	10,6	11,8	13,4	15,0	17,0	18,9	l/s	
	Pressure drops	46	57	33	43	52	48	29	35	44	kPa	
IR	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	151	167	187	214	240	272	304	346	385	kW	
	Power input	59,8	66,9	76,0	86,4	96,6	111	123	138	157	kW	
	EER	2,53	2,50	2,46	2,48	2,48	2,45	2,47	2,51	2,45	W/W	
	ESEER	3,90	3,85	3,82	3,84	3,86	3,82	3,82	3,88	3,81	W/W	
	Water flow rate	7,26	8,03	9,03	10,3	11,6	13,1	14,6	16,7	18,5	l/s	
	Pressure drops	44	54	32	40	50	45	28	33	42	kPa	
IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	154	171	192	215	244	275	310	357	397	kW	
	Power input	55,4	61,8	69,6	78,5	89,9	102	113	129	144	kW	
	EER	2,78	2,77	2,76	2,74	2,71	2,70	2,74	2,77	2,76	W/W	
	ESEER	3,72	3,70	3,72	3,68	3,65	3,65	3,66	3,72	3,73	W/W	
	Water flow rate	7,41	8,22	9,27	10,4	11,8	13,3	14,9	17,2	19,2	l/s	
	Pressure drops	46	57	33	41	52	47	29	35	45	kPa	
A7W45	Heating capacity	169	191	215	240	273	308	345	395	439	kW	
	Power input	56,8	64,0	72,3	81,2	92,7	104	116	132	147	kW	
	COP	2,98	2,98	2,97	2,96	2,94	2,96	2,97	2,99	2,99	W/W	
	Water flow rate	8,03	9,03	10,2	11,4	12,9	14,6	16,3	18,7	20,8	l/s	
Pressure drops	54	68	40	49	62	56	34	42	53	kPa		
IP	Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	148	164	185	206	234	265	298	343	382	kW	
	Power input	58,3	65,2	73,6	86,4	94,7	107	123	136	152	kW	
	EER	2,54	2,52	2,51	2,38	2,47	2,48	2,42	2,52	2,51	W/W	
	ESEER	3,72	3,69	3,69	3,51	3,64	3,63	3,55	3,73	3,70	W/W	
	Water flow rate	7,12	7,88	8,89	9,94	11,3	12,8	14,3	16,5	18,4	l/s	
	Pressure drops	42	52	31	37	47	43	26	33	42	kPa	
A7W45	Heating capacity	162	183	206	230	262	296	331	379	422	kW	
	Power input	53,5	60,3	68,2	76,6	87,3	99	110	125	140	kW	
	COP	3,03	3,03	3,02	3,00	3,00	2,99	3,01	3,03	3,01	W/W	
	Water flow rate	7,69	8,65	9,75	10,9	12,4	14,0	15,7	17,9	20,0	l/s	
Pressure drops	50	63	37	45	57	52	32	38	49	kPa		
IP	eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4		
A35W7	Cooling capacity	145	161	181	203	229	259	291	335	374	kW	
	Power input	59,0	66,1	74,6	84,4	95,8	109	122	137	153	kW	
	EER	2,46	2,44	2,43	2,41	2,39	2,38	2,39	2,45	2,44	W/W	
	ESEER	3,79	3,75	3,75	3,71	3,70	3,69	3,69	3,79	3,77	W/W	
	Water flow rate	6,98	7,74	8,70	9,75	11,0	12,5	14,0	16,1	18,0	l/s	
	Pressure drops	41	50	29	36	45	41	25	31	40	kPa	
A7W45	Heating capacity	161	181	204	228	259	293	328	374	417	kW	
	Power input	51,8	58,5	66,2	74,5	84,6	95,6	106	121	135	kW	
	COP	3,11	3,09	3,08	3,06	3,06	3,06	3,09	3,09	3,09	W/W	
	Water flow rate	7,64	8,60	9,65	10,8	12,3	13,9	15,5	17,7	19,7	l/s	
Pressure drops	49	62	36	44	56	51	31	37	48	kPa		

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	91	92	92	92	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	72	73	73	73	74	75	74	75	75	dB(A)
Sound pressure level at 5 meters	64	65	65	65	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	59	60	60	60	61	62	62	63	63	dB(A)
Low noise setting up (AS)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	85	86	86	86	87	88	88	89	89	dB(A)
Sound pressure level at 1 meter	66	67	67	67	68	69	68	69	69	dB(A)
Sound pressure level at 5 meters	58	59	59	59	60	61	61	62	62	dB(A)
Sound pressure level at 10 meters	53	54	54	54	55	56	56	57	57	dB(A)
eXtra low noise setting up (AX)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Sound power level	82	83	83	83	84	85	85	86	86	dB(A)
Sound pressure level at 1 meter	63	64	64	64	65	66	65	66	66	dB(A)
Sound pressure level at 5 meters	55	56	56	56	57	58	58	59	59	dB(A)
Livello di pressione sonora a 10 metri	50	51	51	51	52	53	53	54	54	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
Power supply	400 - 3 - 50									V-ph-Hz
Compressor type	scroll									-
N° compressors / N° refrigerant circuits	4 / 2									n°
Plant side heat exchanger type	shell and tube									-
Source side heat exchanger type	finned coil									-
Fans type	axial									-
N° fans	4			6			8			n°
Water volume plant side heat exchanger	35.6	35.6	61.5	57.8	57.8	52.8	93.9	87.5	80.2	l
Hydraulic fittings plant side heat exchanger	3" GAS		4" VIC			5" VIC				-

Electrical data

Standard unit	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
FLA - Full load current at maximum tolerated conditions	140	151	177	193	217	243	269	314	335	A
FLI - Full load power input at maximum tolerated conditions	76	87	107	118	133	148	163	186	200	kW
MIC - Maximum instantaneous current of the unit	283	340	347	355	379	469	495	510	558	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	213	250	263	271	295	354	380	404	438	A
Unit with high head modulating pump	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
FLA - Full load current at maximum tolerated conditions	149	160	187	203	227	256	282	327	357	A
FLI - Full load power input at maximum tolerated conditions	81	91	113	124	139	156	171	194	212	kW
MIC - Maximum instantaneous current of the unit	292	348	357	365	389	482	508	524	580	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	222	258	273	281	305	368	394	417	460	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	15	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional plate heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	167	185	207	237	264	300	336	382	425	kW
	Total power input	55,0	61,2	69,3	78,5	88,7	101	112	127	143	kW
	EER	3,04	3,01	2,99	3,02	2,98	2,97	3,00	3,01	2,98	W/W
	HRE	3,90	3,89	3,87	3,91	3,85	3,85	3,90	3,88	3,86	W/W
	Water flow rate	8,05	8,89	10,0	11,4	12,8	14,5	16,2	18,4	20,5	l/s
	Water pressure drop	54	66	39	49	61	56	34	40	52	kPa
	Heating recovery capacity	47,2	53,4	61,2	70,3	76,6	88,7	99,9	110,8	126,6	kW
	Water flow rate recovery	2,25	2,55	2,93	3,36	3,66	4,24	4,77	5,29	6,05	l/s
	Water pressure drop recovery	5	7	8	10	13	16	16	21	25	kPa
	IP	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4
A35W7 - W45	Cooling capacity	160	177	200	224	253	286	322	371	413	kW
	Total power input	54,1	60,4	67,9	76,6	87,8	99	111	126	140	kW
	EER	2,96	2,94	2,94	2,92	2,89	2,88	2,91	2,95	2,96	W/W
	HRE	3,82	3,81	3,83	3,82	3,75	3,76	3,81	3,83	3,85	W/W
	Water flow rate	7,70	8,55	9,64	10,8	12,2	13,8	15,5	17,9	19,9	l/s
	Water pressure drop	50	61	36	44	55	50	31	38	49	kPa
	Heating recovery capacity	46,5	52,7	60,1	68,8	76,1	87,5	98,9	109,8	123,7	kW
	Water flow rate recovery	2,22	2,52	2,87	3,29	3,64	4,18	4,73	5,25	5,91	l/s
	Water pressure drop recovery	5	6	8	10	13	16	16	20	24	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
A35W7 - W45	Cooling capacity	169	186	209	239	267	303	339	386	429	kW
	Total power input	47,3	53,5	61,6	70,7	77,2	89,5	100	111	127	kW
	EER	3,56	3,48	3,39	3,38	3,46	3,39	3,38	3,46	3,37	W/W
	HRE	8,08	7,91	7,75	7,71	7,87	7,72	7,71	7,87	7,69	W/W
	Water flow rate	8,13	8,98	10,1	11,5	12,9	14,6	16,4	18,6	20,7	l/s
	Water pressure drop	55	68	40	50	62	56	35	41	53	kPa
	Heating recovery capacity	214	237	268	306	340	388	434	492	550	kW
	Water flow rate recovery	10,2	11,3	12,8	14,6	16,2	18,5	20,7	23,5	26,3	l/s
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input
A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

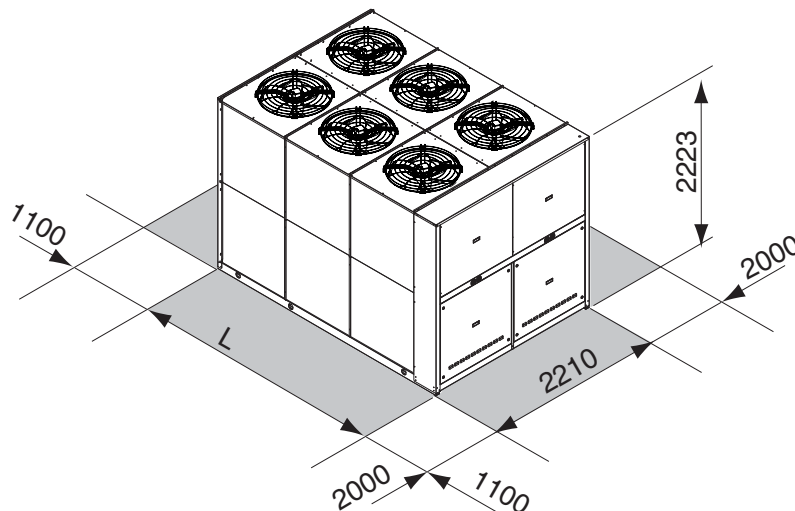

	160.4	180.4	200.4	230.4	260.4	290.4	330.4	375.4	420.4	
L	3164	3164	3164	3164	3164	3164	4097	4097	4097	mm
Operating maximum weight*	2157	2346	2644	2815	2885	2901	3182	3292	3357	kg

* Weight refers to the unit IP complete wuth 2 pumps module without tank.

> RHA

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator

filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- **Refrigerant circuit pressures visualization**
- high and low pressure gauges
- high and low pressure transducers

High temperature thermostat

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control) standard for AS and AX unit

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	348	371	436	489	554	619	kW
	Power input	123	131	152	174	193	219	kW
	EER	2,83	2,83	2,87	2,81	2,87	2,83	W/W
	ESEER	3,90	3,90	3,93	3,90	3,94	3,91	W/W
	Water flow rate	16,8	17,9	21,0	23,6	26,7	29,9	l/s
	Pressure drops	47	54	48	60	45	56	kPa
IR	Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	335	356	418	470	532	595	kW
	Power input	129	140	162	185	207	233	kW
	EER	2,60	2,54	2,58	2,54	2,57	2,55	W/W
	ESEER	3,78	3,74	3,77	3,74	3,76	3,75	W/W
	Water flow rate	16,1	17,2	20,1	22,6	25,6	28,7	l/s
	Pressure drops	43	50	44	55	41	52	kPa
IR	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	328	349	410	460	522	583	kW
	Power input	133	144	166	190	211	239	kW
	EER	2,47	2,42	2,47	2,42	2,47	2,44	W/W
	ESEER	3,87	3,84	3,89	3,84	3,88	3,86	W/W
	Water flow rate	15,8	16,8	19,7	22,2	25,1	28,1	l/s
	Pressure drops	42	47	42	53	40	49	kPa
IP	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	339	361	423	476	536	603	kW
	Power input	120	130	151	171	191	216	kW
	EER	2,83	2,78	2,80	2,78	2,81	2,79	W/W
	ESEER	3,85	3,83	3,84	3,84	3,85	3,85	W/W
	Water flow rate	16,3	17,4	20,4	22,9	25,8	29,0	l/s
	Pressure drops	45	51	45	57	42	53	kPa
A7W45	Heating capacity	373	397	460	521	580	664	kW
	Power input	123	132	152	174	192	223	kW
	COP	3,03	3,01	3,03	2,99	3,02	2,98	W/W
	Water flow rate	17,7	18,8	21,8	24,7	27,5	31,4	l/s
Pressure drops	53	59	51	66	48	62	kPa	
IP	Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	325	346	406	457	515	579	kW
	Power input	128	138	161	183	204	231	kW
	EER	2,54	2,51	2,52	2,50	2,52	2,51	W/W
	ESEER	3,70	3,69	3,69	3,67	3,67	3,69	W/W
	Water flow rate	15,6	16,7	19,5	22,0	24,7	27,9	l/s
	Pressure drops	41	47	41	52	38	49	kPa
A7W45	Heating capacity	358	380	441	500	557	638	kW
	Power input	118	125	145	166	184	213	kW
	COP	3,03	3,04	3,04	3,01	3,03	3,00	W/W
	Water flow rate	17,0	18,0	20,9	23,7	26,4	30,2	l/s
Pressure drops	48	54	47	61	44	57	kPa	
IP	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	319	340	397	447	505	568	kW
	Power input	131	140	165	187	209	236	kW
	EER	2,44	2,43	2,41	2,39	2,42	2,41	W/W
	ESEER	3,83	3,81	3,79	3,79	3,79	3,79	W/W
	Water flow rate	15,3	16,3	19,1	21,5	24,3	27,3	l/s
	Pressure drops	39	45	39	50	37	47	kPa
A7W45	Heating capacity	355	376	436	495	551	631	kW
	Power input	116	123	142	163	180	209	kW
	COP	3,06	3,06	3,07	3,04	3,06	3,02	W/W
	Water flow rate	16,8	17,8	20,7	23,4	26,1	29,9	l/s
Pressure drops	47	53	46	59	43	56	kPa	

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio) = Unit in **A CLASS**.
A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level ^(E)	95	95	96	96	97	97	dB(A)
Sound pressure level at 1 meter	75	75	76	76	76	76	dB(A)
Sound pressure level at 5 meters	67	67	68	68	69	69	dB(A)
Sound pressure level at 10 meters	63	63	64	64	65	65	dB(A)
Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level ^(E)	89	89	90	90	91	91	dB(A)
Sound pressure level at 1 meter	69	69	70	70	70	70	dB(A)
Sound pressure level at 5 meters	61	61	62	62	63	63	dB(A)
Sound pressure level at 10 meters	57	57	58	58	59	59	dB(A)
eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level ^(E)	86	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	66	66	67	67	67	67	dB(A)
Sound pressure level at 5 meters	58	58	59	59	60	60	dB(A)
Sound pressure level at 10 meters	54	54	55	55	56	56	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	350.5	390.6	440.6	490.6	560.6	630.6	
Power supply	400 - 3 - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	5 / 2	6 / 2					n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	8	10		12			n°
Tank volume	700						l
Hydraulic fittings	4" VICTAULIC						-

Electrical data

Standard unit	350.5	390.6	440.6	490.6	560.6	630.6	
FLA - Full load current at maximum tolerated conditions	287	302	355	399	451	494	A
FLI - Full load power input at maximum tolerated conditions	171	182	211	237	272	304	kW
MIC - Maximum instantaneous current of the unit	538	529	605	649	771	815	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	434	441	508	552	640	684	A
Unit with high head modulating pump	350.5	390.6	440.6	490.6	560.6	630.6	
FLA - Full load current at maximum tolerated conditions	308	323	382	426	478	521	A
FLI - Full load power input at maximum tolerated conditions	184	195	227	253	288	320	kW
MIC - Maximum instantaneous current of the unit	558	550	632	676	798	842	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	558	550	632	676	798	842	A

Operative range

Temperature	Unit type	Cooling		Heating		(°C)
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7 - W45	Cooling capacity	362	385	453	509	576	644	kW
	Total power input	120	129	150	170	189	213	kW
	EER	3,02	3	3,03	2,99	3,06	3,02	W/W
	HRE	3,75	3,72	3,76	3,71	3,79	3,75	W/W
	Water flow rate	17,5	18,6	21,8	24,6	27,8	31,0	l/s
	Water pressure drop	51	58	51	65	49	60	kPa
	Heating recovery capacity	87,7	93,4	110	123	139	156	kW
	Water flow rate recovery	4,19	4,46	5,26	5,88	6,64	7,45	l/s
	Water pressure drop recovery	24	27	25	32	31	39	kPa
IP	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7 - W45	Cooling capacity	352	376	440	494	558	626	kW
	Total power input	118	126	147	168	187	211	kW
	EER	2,99	2,97	2,98	2,94	2,98	2,97	W/W
	HRE	3,72	3,69	3,7	3,66	3,71	3,69	W/W
	Water flow rate	16,9	18,1	21,2	23,9	26,8	30,2	l/s
	Water pressure drop	48	55	49	62	45	57	kPa
	Heating recovery capacity	85,2	90,7	106	120	135	152	kW
	Water flow rate recovery	4,07	4,33	5,06	5,73	6,45	7,26	l/s
	Water pressure drop recovery	23	26	24	30	29	36	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7 - W45	Cooling capacity	362	385	453	509	576	644	kW
	Total power input	104	113	130	150	166	190	kW
	EER	3,48	3,42	3,49	3,38	3,48	3,38	W/W
	HRE	7,92	7,8	7,94	7,72	7,92	7,72	W/W
	Water flow rate	17,5	18,6	21,8	24,6	27,8	31,0	l/s
	Water pressure drop	51	58	51	65	49	60	kPa
	Heating recovery capacity	461	493	577	652	734	824	kW
	Water flow rate recovery	22	23,6	27,6	31,2	35,1	39,4	l/s
	Water pressure drop recovery	52	60	51	66	54	68	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

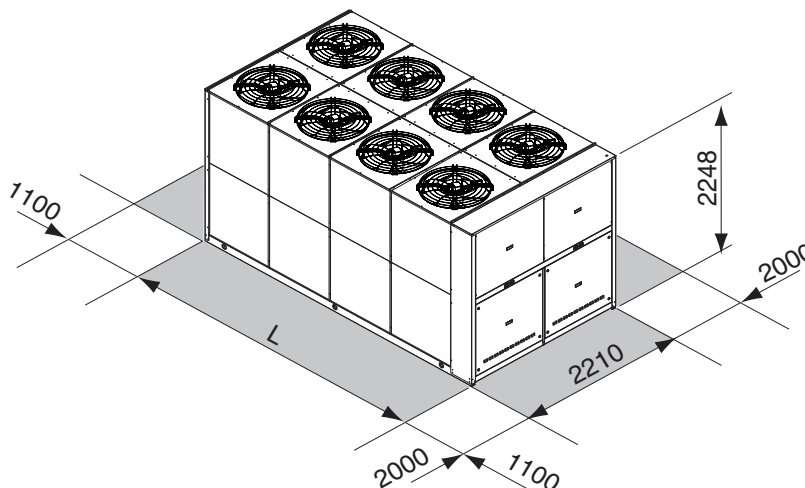

	350.5	390.6	440.6	490.6	560.6	630.6	
L	5030	5030	5030	5030	5963	5963	mm
Operating maximum weight*	4849	5058	5120	5199	5489	5568	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RHA HE

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection gril-

les, finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

[Storing and pumping module](#) available in the configurations :

- storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump

[Refrigerant circuit pressures visualization](#)

- high and low pressure gauges
- high and low pressure transducers

[High temperature thermostat](#)

[Compressor starting](#)

- standard (contactors)
- soft starter

[Fans control](#)

- on-off control
- modulating control (condensation / evaporation control) standard for AS and AX unit

[Compressor power factor correction](#)

[Electrical load protection](#)

- fuses
- thermal magnetic circuit breakers

Accessories

[Rubber vibration dampers](#)

[Spring vibration dampers](#)

[Coil protection grilles](#)

[Tank antifreeze electrical heater](#)

[Remote control](#)

[Modbus serial interface on RS485](#)

[Programmer clock](#)

[Phase sequence and voltage controller](#)

[Water flow switch](#)

[Victaulic hydraulic fittings](#)

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	371	398	457	512	kW
	Power input	118	127	146	163	kW
	EER	3,14	3,13	3,13	3,14	W/W
	ESEER	4,27	4,29	4,25	4,29	W/W
	Water flow rate	17,8	19,1	21,9	24,6	l/s
	Pressure drops	33	38	29	37	kPa
IR	Low noise setting up (AS)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	356	382	439	491	kW
	Power input	125	134	154	172	kW
	EER	2,85	2,85	2,85	2,85	W/W
	ESEER	4,15	4,15	4,13	4,16	W/W
	Water flow rate	17,1	18,3	21,1	23,6	l/s
	Pressure drops	31	35	27	34	kPa
IR	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	349	374	429	482	kW
	Power input	126	136	156	175	kW
	EER	2,77	2,75	2,75	2,75	W/W
	ESEER	4,33	4,33	4,29	4,31	W/W
	Water flow rate	16,8	18,0	20,6	23,1	l/s
	Pressure drops	30	34	26	32	kPa
IP	Base setting up (AB)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	365	392	448	497	kW
	Power input	117	126	144	160	kW
	EER	3,12	3,11	3,11	3,11	W/W
	ESEER	4,24	4,26	4,23	4,25	W/W
	Water flow rate	17,5	18,8	21,5	23,9	l/s
	Pressure drops	32	37	28	35	kPa
A7W45	Heating capacity	387	417	475	534	kW
	Power input	120	129	147	165	kW
	COP	3,23	3,23	3,23	3,24	W/W
	Water flow rate	18,4	19,8	22,6	25,4	l/s
Pressure drops	36	41	31	39	kPa	
IP	Low noise setting up (AS)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	350	376	430	478	kW
	Power input	124	133	152	169	kW
	EER	2,82	2,83	2,83	2,83	W/W
	ESEER	4,12	4,12	4,10	4,12	W/W
	Water flow rate	16,8	18,1	20,6	22,9	l/s
	Pressure drops	30	34	26	32	kPa
A7W45	Heating capacity	372	399	456	513	kW
	Power input	113	121	139	156	kW
	COP	3,29	3,30	3,28	3,29	W/W
	Water flow rate	17,7	19,0	21,7	24,4	l/s
Pressure drops	33	38	28	36	kPa	
IP	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	
A35W7	Cooling capacity	343	368	421	468	kW
	Power input	125	134	154	171	kW
	EER	2,74	2,74	2,73	2,74	W/W
	ESEER	4,29	4,29	4,26	4,29	W/W
	Water flow rate	16,5	17,7	20,2	22,5	l/s
	Pressure drops	29	33	25	31	kPa
A7W45	Heating capacity	368	395	451	507	kW
	Power input	109	118	134	151	kW
	COP	3,38	3,35	3,37	3,36	W/W
	Water flow rate	17,5	18,8	21,5	24,1	l/s
Pressure drops	32	37	28	35	kPa	

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
= Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	350.5	390.6	440.6	490.6	
Sound power level ^(E)	95	95	96	96	dB(A)
Sound pressure level at 1 meter	75	75	76	76	dB(A)
Sound pressure level at 5 meters	67	67	68	68	dB(A)
Sound pressure level at 10 meters	63	63	64	64	dB(A)
Low noise setting up (AS)	350.5	390.6	440.6	490.6	
Sound power level ^(E)	89	89	90	90	dB(A)
Sound pressure level at 1 meter	69	69	70	70	dB(A)
Sound pressure level at 5 meters	61	61	62	62	dB(A)
Sound pressure level at 10 meters	57	57	58	58	dB(A)
eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	
Sound power level ^(E)	86	86	87	87	dB(A)
Sound pressure level at 1 meter	66	66	67	67	dB(A)
Sound pressure level at 5 meters	58	58	59	59	dB(A)
Sound pressure level at 10 meters	54	54	55	55	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	350.5	390.6	440.6	490.6	
Power supply	400 - 3 - 50				V-ph-Hz
Compressor type	scroll				-
N° compressors / N° refrigerant circuits	5 / 2	6 / 2			n°
Plant side heat exchanger type	stainless steel brazed plates				-
Source side heat exchanger type	finned coil				-
Fans type	axial				-
N° fans	8	10			n°
Tank volume	700				l
Hydraulic fittings	4" VICTAULIC				-

Electrical data

Standard unit	350.5	390.6	440.6	490.6	
FLA - Full load current at maximum tolerated conditions	287	302	355	399	A
FLI - Full load power input at maximum tolerated conditions	171	182	211	237	kW
MIC - Maximum instantaneous current of the unit	538	529	605	649	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	414	421	481	525	A
Unit with high head modulating pump	350.5	390.6	440.6	490.6	
FLA - Full load current at maximum tolerated conditions	308	323	382	426	A
FLI - Full load power input at maximum tolerated conditions	184	195	227	253	kW
MIC - Maximum instantaneous current of the unit	558	550	632	676	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	434	441	508	552	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-15	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection fuction

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	
A35W7 - W45	Cooling capacity	386	413	475	532	kW
	Total power input	115,6	123,8	142,6	159,1	kW
	EER	3,34	3,34	3,33	3,34	W/W
	HRE	4,21	4,22	4,21	4,23	W/W
	Water flow rate	18,5	19,9	22,8	25,6	l/s
	Water pressure drop	36	41	31	40	kPa
	Heating recovery capacity	101	109	125	140	kW
	Water flow rate recovery	4,82	5,20	5,96	6,71	l/s
	Water pressure drop recovery	24	27	25	32	kPa
IP	Base setting up (AB)	350.5	390.6	440.6	490.6	
A35W7 - W45	Cooling capacity	380	407	466	517	kW
	Total power input	114,5	122,7	140,5	155,9	kW
	EER	3,32	3,32	3,31	3,32	W/W
	HRE	4,12	4,12	4,11	4,12	W/W
	Water flow rate	18,2	19,6	22,4	24,8	l/s
	Water pressure drop	35	40	30	37	kPa
	Heating recovery capacity	92	98	112	125	kW
	Water flow rate recovery	4,38	4,70	5,35	5,97	l/s
	Water pressure drop recovery	20	22	20	25	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	
A35W7 - W45	Cooling capacity	386	413	475	532	kW
	Total power input	100	108	123	140	kW
	EER	3,85	3,81	3,85	3,81	W/W
	HRE	8,65	8,58	8,65	8,57	W/W
	Water flow rate	18,50	19,9	22,8	25,6	l/s
	Water pressure drop	36	41	31	40	kPa
	Heating recovery capacity	481	516	592	665	kW
	Water flow rate recovery	23,0	24,7	28,3	31,8	l/s
	Water pressure drop recovery	52	59	48	61	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

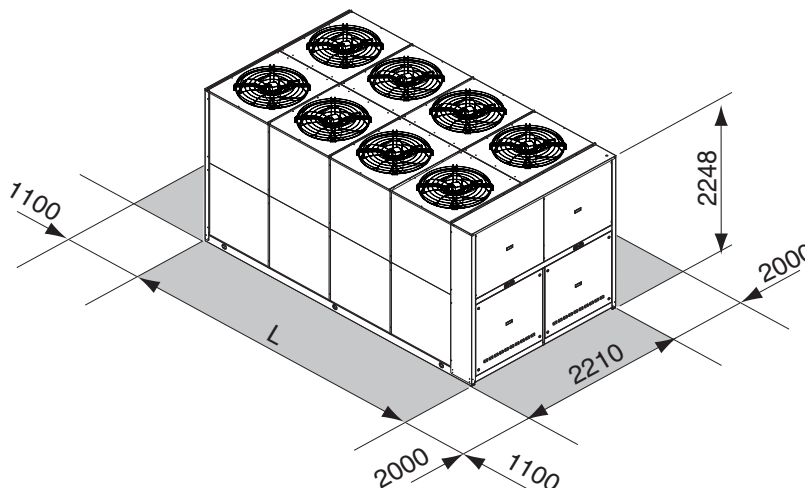

	350.5	390.6	440.6	490.6	
L	5030	5030	5030	5030	mm
Operating maximum weight*	4900	5110	5220	5300	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RHA ST

AIR-WATER CHILLERS AND HEAT PUMPS FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version (with plate heat exchanger)
VR	Total recovery version (with plate heat exchanger)

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of large size.

All the units are suitable for outdoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, shell and tube heat exchanger with threaded or

victaulic fittings (according to the model), electronic expansion valve, reverse cycle valve, dehydrator filter, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the heat exchanger.

The heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing module available in the configurations :

- 1 or 2 pumps
- standard or high head pump
- Refrigerant circuit pressures visualization**
- high and low pressure gauges
- high and low pressure transducers

High temperature thermostat

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control) standard for AS and AX unit

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	348	371	436	489	554	619	kW
	Power input	123	131	152	174	193	219	kW
	EER	2,83	2,83	2,87	2,81	2,87	2,83	W/W
	ESEER	3,90	3,90	3,93	3,90	3,94	3,91	W/W
	Water flow rate	16,8	17,9	21,0	23,6	26,7	29,9	l/s
	Pressure drops	36	35	50	67	39	67	kPa
IR	Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	335	356	418	470	532	595	kW
	Power input	129	140	162	185	207	233	kW
	EER	2,60	2,54	2,58	2,54	2,57	2,55	W/W
	ESEER	3,78	3,74	3,77	3,74	3,76	3,75	W/W
	Water flow rate	16,1	17,2	20,1	22,6	25,6	28,7	l/s
	Pressure drops	33	32	46	62	36	62	kPa
IR	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	328	349	410	460	522	583	kW
	Power input	133	144	166	190	211	239	kW
	EER	2,47	2,42	2,47	2,42	2,47	2,44	W/W
	ESEER	3,87	3,84	3,89	3,84	3,88	3,86	W/W
	Water flow rate	15,8	16,8	19,7	22,2	25,1	28,1	l/s
	Pressure drops	32	31	44	59	35	59	kPa
IP	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	339	361	423	476	536	603	kW
	Power input	120	130	151	171	191	216	kW
	EER	2,83	2,78	2,80	2,78	2,81	2,79	W/W
	ESEER	3,85	3,83	3,84	3,84	3,85	3,85	W/W
	Water flow rate	16,3	17,4	20,4	22,9	25,8	29,0	l/s
	Pressure drops	34	33	47	63	37	63	kPa
A7W45	Heating capacity	373	397	460	521	580	664	kW
	Power input	123	132	152	174	192	223	kW
	COP	3,03	3,01	3,03	2,99	3,02	2,98	W/W
	Water flow rate	17,7	18,8	21,8	24,7	27,5	31,4	l/s
Pressure drops	40	38	54	74	41	74	kPa	
IP	Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	325	346	406	457	515	579	kW
	Power input	128	138	161	183	204	231	kW
	EER	2,54	2,51	2,52	2,50	2,52	2,51	W/W
	ESEER	3,70	3,69	3,69	3,67	3,67	3,69	W/W
	Water flow rate	15,6	16,7	19,5	22,0	24,7	27,9	l/s
	Pressure drops	31	30	44	59	33	58	kPa
A7W45	Heating capacity	358	380	441	500	557	638	kW
	Power input	118	125	145	166	184	213	kW
	COP	3,03	3,04	3,04	3,01	3,03	3,00	W/W
	Water flow rate	17,0	18,0	20,9	23,7	26,4	30,2	l/s
Pressure drops	37	35	50	68	38	69	kPa	
IP	eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7	Cooling capacity	319	340	397	447	505	568	kW
	Power input	131	140	165	187	209	236	kW
	EER	2,44	2,43	2,41	2,39	2,42	2,41	W/W
	ESEER	3,83	3,81	3,79	3,79	3,79	3,79	W/W
	Water flow rate	15,3	16,3	19,1	21,5	24,3	27,3	l/s
	Pressure drops	30	29	42	56	32	56	kPa
A7W45	Heating capacity	355	376	436	495	551	631	kW
	Power input	116	123	142	163	180	209	kW
	COP	3,06	3,06	3,07	3,04	3,06	3,02	W/W
	Water flow rate	16,8	17,8	20,7	23,4	26,1	29,9	l/s
Pressure drops	36	35	49	66	37	67	kPa	

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level	95	95	96	96	97	97	dB(A)
Sound pressure level at 1 meter	75	75	76	76	76	76	dB(A)
Sound pressure level at 5 meters	67	67	68	68	69	69	dB(A)
Sound pressure level at 10 meters	63	63	64	64	65	65	dB(A)
Low noise setting up (AS)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level	89	89	90	90	91	91	dB(A)
Sound pressure level at 1 meter	69	69	70	70	70	70	dB(A)
Sound pressure level at 5 meters	61	61	62	62	63	63	dB(A)
Sound pressure level at 10 meters	57	57	58	58	59	59	dB(A)
eXtra low noise setting up (AX)	350.5	390.6	440.6	490.6	560.6	630.6	
Sound power level	86	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	66	66	67	67	67	67	dB(A)
Sound pressure level at 5 meters	58	58	59	59	60	60	dB(A)
Sound pressure level at 10 meters	54	54	55	55	56	56	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	350.5	390.6	440.6	490.6	560.6	630.6	
Power supply	400 - 3 - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	5 / 2	6 / 2					n°
Plant side heat exchanger type	shell and tube						-
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	8	10		12			n°
Water volume plant side heat exchanger	93.9	87.5	80.2	80.2	124.7	113.5	l
Hydraulic fittings plant side heat exchanger	5" VIC			6" VIC			-

Electrical data

Standard unit	350.5	390.6	440.6	490.6	560.6	630.6	
FLA - Full load current at maximum tolerated conditions	287	302	355	399	451	494	A
FLI - Full load power input at maximum tolerated conditions	171	182	211	237	272	304	kW
MIC - Maximum instantaneous current of the unit	538	529	605	649	771	815	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	434	441	508	552	640	684	A
Unit with high head modulating pump	350.5	390.6	440.6	490.6	560.6	630.6	
FLA - Full load current at maximum tolerated conditions	308	323	382	426	478	521	A
FLI - Full load power input at maximum tolerated conditions	184	195	227	253	288	320	kW
MIC - Maximum instantaneous current of the unit	558	550	632	676	798	842	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	558	550	632	676	798	842	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	15	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional plate heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7 - W45	Cooling capacity	362	385	453	509	576	644	kW
	Total power input	120	129	150	170	189	213	kW
	EER	3,02	3	3,03	2,99	3,06	3,02	W/W
	HRE	3,75	3,72	3,76	3,71	3,79	3,75	W/W
	Water flow rate	17,5	18,6	21,8	24,6	27,8	31,0	l/s
	Water pressure drop	39	38	54	72	42	73	kPa
	Heating recovery capacity	87,7	93,4	110	123	139	156	kW
	Water flow rate recovery	4,19	4,46	5,26	5,88	6,64	7,45	l/s
	Water pressure drop recovery	24	27	25	32	31	39	kPa
	IP	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6
A35W7 - W45	Cooling capacity	352	376	440	494	558	626	kW
	Total power input	118	126	147	168	187	211	kW
	EER	2,99	2,97	2,98	2,94	2,98	2,97	W/W
	HRE	3,72	3,69	3,7	3,66	3,71	3,69	W/W
	Water flow rate	16,9	18,1	21,2	23,9	26,8	30,2	l/s
	Water pressure drop	36	36	51	69	39	69	kPa
	Heating recovery capacity	85,2	90,7	106	120	135	152	kW
	Water flow rate recovery	4,07	4,33	5,06	5,73	6,45	7,26	l/s
	Water pressure drop recovery	23	26	24	30	29	36	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	350.5	390.6	440.6	490.6	560.6	630.6	
A35W7 - W45	Cooling capacity	362	385	453	509	576	644	kW
	Total power input	104	113	130	150	166	190	kW
	EER	3,48	3,42	3,49	3,38	3,48	3,38	W/W
	HRE	7,92	7,8	7,94	7,72	7,92	7,72	W/W
	Water flow rate	17,5	18,6	21,8	24,6	27,8	31,0	l/s
	Water pressure drop	39	38	55	74	43	74	kPa
	Heating recovery capacity	461	493	577	652	734	824	kW
	Water flow rate recovery	22	23,6	27,6	31,2	35,1	39,4	l/s
	Water pressure drop recovery	52	60	51	66	54	68	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input
A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- ATC outdoor high temperature protection function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Double set point function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

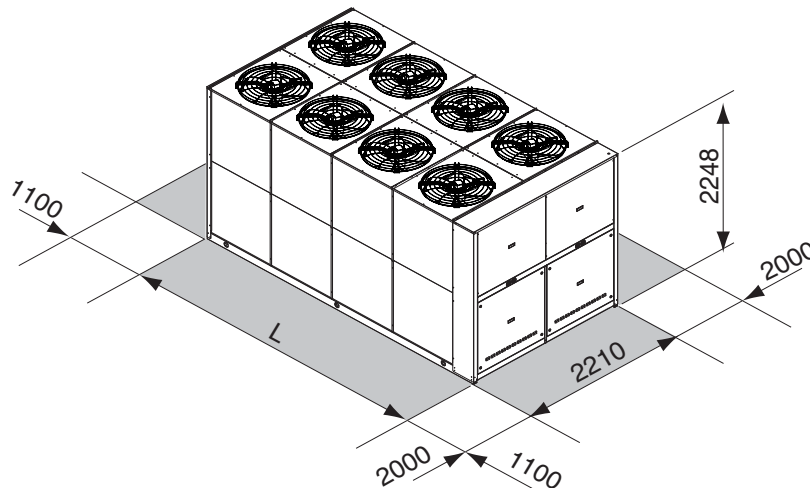

	350.5	390.6	440.6	490.6	560.6	630.6	
L	5030	5030	5030	5030	5963	5963	mm
Operating maximum weight*	3853	4053	4087	4166	4477	4560	kg

* Weight refers to the unit IP complete wuth 2 pumps module without tank.

> RHV

AIR WATER CHILLER FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
BR	Chiller Brine

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This range of air-water chillers are designed to meet the climate control and air conditioning needs of large capacity systems in the industrial and commercial sectors. Suitable for outdoor installation, as standard the units are equipped with 2 TWIN-SCREW semihermetic compressors mounted on rubber vibration dampers, able to modulate the capacity of the unit from minimum 12.5 (not for all configurations) to 100%, plant side exchanger shell and tube type complete with Victaulic water connections, fitted inside a shell of thermal insulation material to prevent condensation and heat exchange with the outside, optimised for R134a with high efficiency grooved tubes, protected by means of a water differential pressure switch and from the winter freeze y means of an antifreeze heater,

source side exchanger finned coils with large heat exchange surface, made with copper pipes and louvered aluminium fins, 2 independent refrigerant circuits, complete with electronic expansion valve which optimises unit efficiency at full and partial loads and enables maximum seasonal efficiency, maximum and minimum pressure switch, PED safety valves, dehydrator filter, liquid/moisture indicator, compressor discharge and liquid shut-off valves, high and low pressure transducers, electrical panel with minimum protection IP54 containing the electrical equipment and all the components to control and command the unit complete with main supply breaker with door lock function, phase sequence control device, microprocessor controller with display (4 lines of 20 characters). In addition to the standard features the Low noise setting up (AS) is equipped with fans reduced speed and compressors positioned inside a soundproofed cabin, made with profiles and panels insulated with acoustic material. In addition to the standard features the eXtra low noise setting up (AX) is equipped with coils with larger surface in order to further reduce the fans speed and compressors positioned inside a soundproofed cabin, made with profiles and panels insulated with superior acoustic material. The range is completed with numerous accessories and options, including the possibility of having units equipped with 2 pumps pumping modules, 2 poles for Basic Version and 4 poles for Low Noise and Extra Low Noise setting up. The units are carefully built and tested, therefore installation only requires the electrical and hydraulic connections.

Options

Compressor starting

- standard (contactors)
- soft starter

Compressors power factor correction

Electrical load protection

- standard (fuses)
- thermal magnetic circuit breakers

Accessories

Integrated Pumping Modules with 2 pumps, supplied in 4 different configurations:

- Pumps 2 poles standard head
- Pumps 2 poles high head
- Pumps 2 poles extra high head
- Pumps 4 poles standard head

Condensation Control Device (standard for AS and AX), enables unit operation to outside air temperatures $\approx -10^{\circ}\text{C}$

Spring vibration dampers

Coil protection grilles

Antintrusion protection grilles

External Water Storage Tank and Pumping Module complete with insulated carbon steel tank, single or twin pump and all hydronic components.

Antifreeze electrical heaters for Storage tank

Remote controller

Serial Interface Modbus on RS 485

Programmer clock

Phase sequence and voltage controller

High and low pressure gauges

Compressor suction shut-off valve

Water flow switch

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	329	363	412	464	507	589	660	738	795	883	980	1104	kW
	Power input	122	139	154	169	192	215	230	265	288	332	359	389	kW
	EER	2,71	2,6	2,68	2,74	2,63	2,74	2,88	2,78	2,77	2,66	2,73	2,84	W/W
	ESEER	3,34	3,23	3,33	3,44	3,31	3,46	3,54	3,51	3,51	3,42	3,48	3,69	W/W
	Water flow rate	15,9	17,5	19,8	22,4	24,4	28,4	31,8	35,5	38,3	42,6	47,2	53,2	l/s
	Pressure drops	49	57	44	56	53	53	44	45	52	60	42	56	kPa
IR	Low noise setting up (AS)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	319	351	396	443	490	563	638	710	763	849	937	1071	kW
	Power input	120	139	154	171	191	219	239	270	296	334	367	400	kW
	EER	2,65	2,52	2,58	2,6	2,57	2,57	2,67	2,63	2,58	2,54	2,55	2,68	W/W
	ESEER	3,45	3,29	3,32	3,38	3,32	3,31	3,44	3,39	3,35	3,32	3,31	3,55	W/W
	Water flow rate	15,3	16,9	19,1	21,4	23,6	27,1	30,7	34,2	36,7	40,9	45,1	51,6	l/s
	Pressure drops	46	54	40	51	50	48	41	41	47	55	39	53	kPa
IR	eXtra low noise setting up (AX)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	305	348	389	432	486	547	632	695	748	857	937	1067	kW
	Power input	125	141	157	176	194	230	249	277	304	337	374	412	kW
	EER	2,44	2,47	2,47	2,45	2,51	2,38	2,54	2,5	2,47	2,55	2,51	2,59	W/W
	ESEER	3,22	3,29	3,22	3,2	3,28	3,1	3,32	3,28	3,24	3,39	3,3	3,48	W/W
	Water flow rate	14,7	16,8	18,7	20,8	23,4	26,3	30,4	33,4	36	41,3	45,1	51,4	l/s
	Pressure drops	42	53	39	48	49	46	40	40	46	56	39	52	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

_____ = Unit in A CLASS.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

Acoustic performances

Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	98	98	98	98	100	100	100	101	101	102	102	103	dB(A)
Sound pressure level at 1 meter	79	79	79	79	80	80	80	80	80	81	81	82	dB(A)
Sound pressure level at 5 meters	71	71	71	71	72	72	72	73	73	74	73	74	dB(A)
Sound pressure level at 10 meters	66	66	66	66	67	67	67	69	69	69	69	70	dB(A)
Low noise setting up (AS)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	93	93	93	93	94	94	94	96	96	97	97	98	dB(A)
Sound pressure level at 1 meter	73	73	73	73	74	74	74	75	75	75	75	76	dB(A)
Sound pressure level at 5 meters	65	65	65	65	67	66	66	67	67	68	68	69	dB(A)
Sound pressure level at 10 meters	61	61	61	61	62	62	62	63	63	64	64	65	dB(A)
eXtra low noise setting up (AX)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	87	87	87	87	88	88	90	91	91	92	92	93	dB(A)
Sound pressure level at 1 meter	67	67	67	67	68	68	69	69	69	70	70	71	dB(A)
Sound pressure level at 5 meters	59	59	59	59	61	60	62	63	63	63	63	65	dB(A)
Sound pressure level at 10 meters	55	55	55	55	56	56	57	58	58	59	59	60	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Power supply	400 - 3 - 50												V-ph-Hz
Compressor type	twin-screw												-
N° compressors / N° refrigerant circuits	2 / 2												n°
Part load	12.5 / 100% stepless												-
Plant side heat exchanger type	shell & tube												-
Source side heat exchanger type	finned coil												-
Fans type	axial												n°
N° fans (AB / AS)	8	8	8	8	10	10	10	12	12	14	14	16	l
N° fans (AX)	8	8	8	8	10	10	12	14	14	16	16	20	
Hydraulic fittings (victaulic)	DN100	DN100	DN125	DN125	DN125	DN150	DN150	DN150	DN150	DN200	DN200	DN200	-

Electrical data

Standard unit		330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
FLA - Full load current at maximum tolerated conditions	AB	274	304	332	360	409	469	469	557	594	684	746	755	A
	AS	274	304	332	360	409	469	469	557	594	684	746	755	
	AX	258	288	316	344	389	449	454	537	574	661	723	732	
FLI - Full load power input at maximum tolerated conditions	AB	164	184	200	216	242	282	282	339	364	412	452	456	kW
	AS	164	184	200	216	242	282	282	339	364	412	452	456	
	AX	157	177	193	209	233	273	275	330	355	402	442	446	
MIC - Maximum instantaneous current of the unit	AB	504	592	689	717	838	921	921	751	788	958	1053	1062	A
	AS	504	592	689	717	838	921	921	751	788	958	1053	1062	
	AX	488	576	673	701	818	901	906	731	768	935	1030	1039	

Operative range

Cooling

Temperature	Unit type	min	max	
Outdoor air inlet temperature	IR, BR	-10*	50**	(°C)
Water outlet temperature	IR	5	15	(°C)
Water outlet temperature	BR	-8	5	(°C)
Water outlet temperature (VD)	IR, BR	35	55	(°C)
Water outlet temperature (VR)	IR, BR	35	55	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

USER INTERFACING

The controller on the unit is designed to ensure energy-saving and efficiency.

It enables the setting of:

- Double Set Point
- Demand Limit
- ATC function to avoid the block of the unit with high outdoor air temperature
- Dinamic set point
- Noise emission control
- Remote stand by



VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

DESUPERHEATERS VERSION VD

Allows the production of cold water as in the standard version and, simultaneously, of hot water at temperatures from 35 to 50 ° C. This is achieved by inserting, between the compressor and finned coil, a heat exchanger water-gas cooler which allows for heat recovery from 15 to 20% of thermal power.

TOTAL RECOVERY VERSION VR

Allows the production of cold water and simultaneously of hot water at temperatures from 35 to 50 ° C by using a heat exchanger, water-gas cooler which allows the total recovery of thermal power. The inclusion and exclusion of the total heat recovery, is done by a valve placed on the discharge of the compressors on each circuit.

Desupeheater Version (VD) - NET NOMINAL performances


IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7 - W45	Cooling capacity	342	377	429	482	526	612	687	767	827	918	1018	1148	kW
	Total power input	118	136	149	165	187	209	223	257	279	323	349	378	kW
	EER	2,9	2,78	2,87	2,93	2,81	2,94	3,08	2,99	2,96	2,85	2,92	3,03	W/W
	HRE	3,69	3,58	3,69	3,75	3,63	3,76	3,91	3,81	3,78	3,67	3,76	3,86	W/W
	Water flow rate	16,5	18,2	20,6	23,3	25,4	29,5	33	36,9	39,9	44,3	49	55,4	l/s
	Water pressure drop	53	62	47	60	58	57	47	48	56	65	46	61	kPa
	Heating recovery capacity	93	109	122	135	152	171	185	212	231	266	292	313	kW
	Water flow rate recovery	4,5	5,2	5,8	6,4	7,2	8,2	8,8	10,1	11,1	12,7	14	15	l/s
	Water pressure drop recovery	10	13	17	10	13	12	14	18	15	12	15	17	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7 - W45	Cooling capacity	325	359	413	468	519	593	653	742	799	897	989	1122	kW
	Total power input	109	126	139	153	169	193	212	238	263	297	330	352	kW
	EER	3	2,84	2,97	3,05	3,08	3,07	3,09	3,11	3,04	3,02	3	3,18	W/W
	HRE	6,95	6,64	6,9	7,06	7,11	7,09	7,13	7,17	7,04	6,99	6,95	7,32	W/W
	Water flow rate	15,7	17,3	19,9	22,6	25	28,6	31,4	35,7	38,5	43,3	47,6	54,1	l/s
	Water pressure drop	48	56	44	56	56	54	43	45	52	62	43	58	kPa
	Heating recovery capacity	429	479	545	614	680	777	855	968	1049	1180	1303	1457	kW
	Water flow rate recovery	20,5	22,9	26	29,3	32,5	37,1	40,8	46,3	50,1	56,4	62,2	69,6	l/s
	Water pressure drop recovery	27	33	43	45	47	43	47	44	52	47	48	50	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input
A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

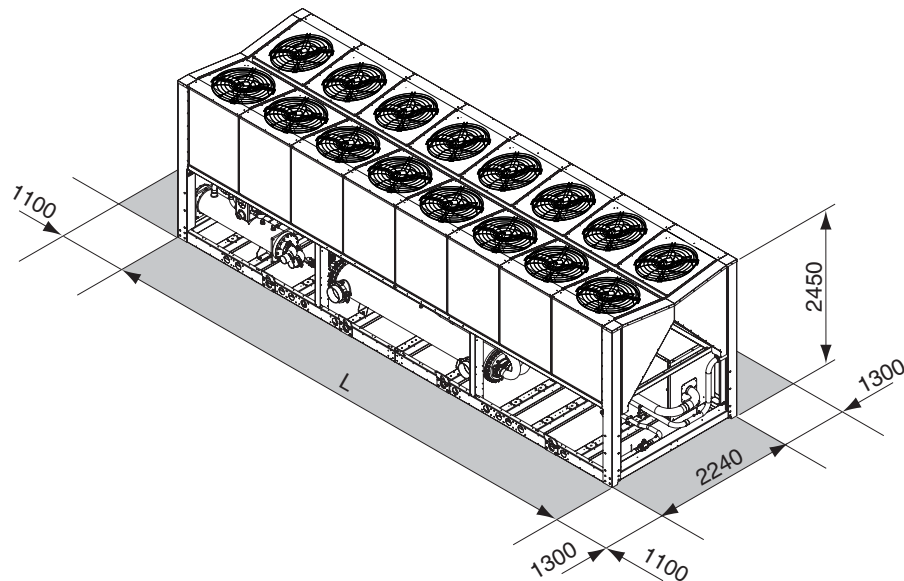

		330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
L	AB	4070	4070	4070	4070	5005	5005	5005	5950	5950	6900	6900	7810	mm
	AS	4070	4070	4070	4070	5005	5005	5005	5950	5950	6900	6900	7810	mm
	AX	4070	4070	4070	4070	5005	5005	5950	6900	6900	7810	7810	10000	mm
Operating maximum weight*		3734	3800	4192	4534	4731	5059	5318	6567	6715	7377	8032	9091	kg

* Weight refers to the unit IR with tank and pumping module 2 pumps.

> RHV HE

AIR WATER CHILLER
FOR OUTDOOR INSTALLATION



Available range

Unit type

IR	Chiller
BR	Chiller Brine

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This range of air-water chillers are designed to meet the climate control and air conditioning needs of large capacity systems in the industrial and commercial sectors. Suitable for outdoor installation, as standard the units are equipped with 2 TWIN-SCREW semihermetic compressors mounted on rubber vibration dampers, able to modulate the capacity of the unit from minimum 12.5 (not for all configurations) to 100%, plant side exchanger shell and tube type complete with Victaulic water connections, fitted inside a shell of thermal insulation material to prevent condensation and heat exchange with the outside, optimised for R134a with high efficiency grooved tubes, protected by means of a water differential pressure switch and from the winter freeze by means of an antifreeze

heater, source side exchanger finned coils with large heat exchange surface, made with copper pipes and louvered aluminium fins, 2 independent refrigerant circuits, complete with electronic expansion valve which optimises unit efficiency at full and partial loads and enables maximum seasonal efficiency, maximum and minimum pressure switch, PED safety valves, dehydrator filter, liquid/moisture indicator, compressor discharge and liquid shut-off valves, high and low pressure transducers, electrical panel with minimum protection IP54 containing the electrical equipment and all the components to control and command the unit complete with main supply breaker with door lock function, phase sequence control device, microprocessor controller with display (4 lines of 20 characters). In addition to the standard features the Low noise setting up (AS) is equipped with fans reduced speed and compressors positioned inside a soundproofed cabin, made with profiles and panels insulated with acoustic material. In addition to the standard features the eXtra low noise setting up (AX) is equipped with coils with larger surface in order to further reduce the fans speed and compressors positioned inside a soundproofed cabin, made with profiles and panels insulated with superior acoustic material. The range is completed with numerous accessories and options, including the possibility of having units equipped with pumping modules with pumps 2 poles for Basic Version and 4 poles for Low Noise and Extra Low Noise setting up. The units are carefully built and tested, therefore installation only requires the electrical and hydraulic connections.

Options

- [Compressor starting](#)
 - standard (contactors)
 - soft starter

- [Compressors power factor correction](#)
- [Electrical load protection](#)
 - standard (fuses)
 - thermal magnetic circuit breakers

Accessories

- [Integrated Pumping Modules](#) with 2 pumps, supplied in 4 different configurations:
 - Pumps 2 poles standard head
 - Pumps 2 poles high head
 - Pumps 2 poles extra high head
 - Pumps 4 poles standard head
- [Condensation Control Device](#) (standard for AS and AX), enables unit operation to outside air temperatures $\leq -10^{\circ}\text{C}$
- [Spring vibration dampers](#)
- [Coil protection grilles](#)
- [Antintrusion protection grilles](#)
- [External Water Storage Tank and Pumping Module](#) complete with insulated carbon steel tank, single or twin pump and all hydronic components.
- [Antifreeze electrical heaters for Storage tank](#)
- [Remote controller](#)
- [Serial Interface Modbus on RS 485](#)
- [Programmer clock](#)
- [Phase sequence and voltage controller](#)
- [High and low pressure gauges](#)
- [Compressor suction shut-off valve](#)
- [Water flow switch](#)

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	356	395	451	502	557	638	686	796	858	970	1079	1172	kW
	Power input	118	130	147	163	177	206	220	257	278	318	349	368	kW
	EER	3,02	3,04	3,07	3,08	3,14	3,1	3,12	3,09	3,09	3,05	3,09	3,19	W/W
	ESEER	3,61	3,63	3,65	3,69	3,72	3,74	3,77	3,74	3,74	3,7	3,76	3,87	W/W
	Water flow rate	17,2	19	21,7	24,2	26,8	30,7	33,1	38,4	41,3	46,7	52,1	56,5	l/s
	Pressure drops	51	45	40	48	39	49	52	57	50	51	64	53	kPa
IR	Low noise setting up (AS)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	347	386	438	485	544	618	675	774	832	941	1044	1152	kW
	Power input	115	128	145	163	175	208	227	259	283	318	350	374	kW
	EER	3,03	3,03	3,03	2,99	3,1	2,98	2,98	2,99	2,94	2,96	2,98	3,08	W/W
	ESEER	3,81	3,8	3,79	3,68	3,86	3,84	3,85	3,86	3,76	3,82	3,87	3,98	W/W
	Water flow rate	16,7	18,6	21,1	23,4	26,1	29,8	32,5	37,3	40	45,3	50,4	55,5	l/s
	Pressure drops	49	43	38	45	37	46	51	54	47	48	60	51	kPa
IR	eXtra low noise setting up (AX)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7	Cooling capacity	335	376	422	463	529	590	650	741	799	913	1022	1121	kW
	Power input	117	130	149	169	182	218	238	269	294	323	362	394	kW
	EER	2,85	2,88	2,82	2,74	2,91	2,71	2,73	2,76	2,72	2,83	2,82	2,85	W/W
	ESEER	3,69	3,71	3,66	3,64	3,76	3,62	3,64	3,69	3,66	3,76	3,74	3,78	W/W
	Water flow rate	16,1	18,1	20,3	22,3	25,4	28,4	31,3	35,7	38,5	44	49,3	54	l/s
	Pressure drops	45	41	35	41	35	42	47	49	43	45	57	48	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

_____ = Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

Acoustic performances

Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	97	97	97	97	99	99	99	100	100	101	101	102	dB(A)
Sound pressure level at 1 meter	77	77	77	77	79	78	78	79	79	80	79	80	dB(A)
Sound pressure level at 5 meters	69	69	69	69	71	71	71	72	72	73	72	73	dB(A)
Sound pressure level at 10 meters	65	65	65	65	67	67	67	67	67	68	68	69	dB(A)
Low noise setting up (AS)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	92	92	92	92	93	93	93	95	95	96	96	97	dB(A)
Sound pressure level at 1 meter	72	72	72	72	73	72	72	74	74	75	74	75	dB(A)
Sound pressure level at 5 meters	64	64	64	64	65	65	65	67	67	68	67	68	dB(A)
Sound pressure level at 10 meters	60	60	60	60	61	61	61	62	62	63	63	64	dB(A)
eXtra low noise setting up (AX)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Sound power level ^(E)	87	87	88	88	90	90	90	91	91	92	92	93	dB(A)
Sound pressure level at 1 meter	67	67	68	68	70	69	69	70	70	71	70	71	dB(A)
Sound pressure level at 5 meters	59	59	60	60	62	62	62	63	63	64	63	64	dB(A)
Sound pressure level at 10 meters	55	55	56	56	58	58	58	58	58	59	59	60	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
Power supply	400 - 3 - 50												V-ph-Hz
Compressor type	twin-screw												-
N° compressors / N° refrigerant circuits	2 / 2												n°
Part load	12.5 / 100% stepless												-
Plant side heat exchanger type	shell & tube												-
Source side heat exchanger type	finned coil												-
Fans type	axial												n°
N° fans	8		10		12		14		16		20		l
Hydraulic fittings (victaulic)	DN150		DN200										-

Electrical data

Standard unit	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
FLA - Full load current at maximum tolerated conditions	274	304	341	369	409	478	478	565	602	693	772	772	A
FLI - Full load power input at maximum tolerated conditions	164	184	204	220	242	286	286	343	368	416	464	464	kW
MIC - Maximum instantaneous current of the unit	504	592	698	726	838	930	930	759	796	967	1079	1079	A

Operative range

Cooling

Temperature	Unit type	min	max	
Outdoor air inlet temperature	IR, BR	-10*	52**	(°C)
Water outlet temperature	IR	5	15	(°C)
Water outlet temperature	BR	-8	5	(°C)
Water outlet temperature (VD)	IR, BR	35	50	(°C)
Water outlet temperature (VR)	IR, BR	35	50	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

USER INTERFACING

The controller on the unit is designed to ensure energy-saving and efficiency.

It enables the setting of:

- Double Set Point
- Demand Limit
- ATC function to avoid the block of the unit with high outdoor air temperature
- Dinamic set point
- Noise emission control
- Remote stand by



VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

DESUPERHEATERS VERSION VD

Allows the production of cold water as in the standard version and, simultaneously, of hot water at temperatures from 35 to 50 ° C. This is achieved by inserting, between the compressor and finned coil, a heat exchanger water-gas cooler which allows for heat recovery from 15 to 20% of thermal power.

TOTAL RECOVERY VERSION VR

Allows the production of cold water and simultaneously of hot water at temperatures from 35 to 50 ° C by using a heat exchanger, water-gas cooler which allows the total recovery of thermal power. The inclusion and exclusion of the total heat recovery, is done by a valve placed on the discharge of the compressors on each circuit.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7 - W45	Cooling capacity	370	411	469	522	578	663	714	827	892	1008	1122	1218	kW
	Total power input	115	127	143	159	173	202	214	251	272	311	341	359	kW
	EER	3,21	3,23	3,27	3,27	3,34	3,29	3,33	3,29	3,28	3,24	3,28	3,39	W/W
	HRE	4,01	4,05	4,08	4,09	4,18	4,11	4,15	4,11	4,12	4,08	4,1	4,22	W/W
	Water flow rate	17,8	19,8	22,6	25,1	27,8	31,9	34,4	39,9	43	48,6	54,2	58,7	l/s
	Water pressure drop	55	49	43	52	42	53	56	62	54	55	69	57	kPa
	Heating recovery capacity	93	104	116	130	144	165	177	207	227	259	278	297	kW
	Water flow rate recovery	4,4	5	5,5	6,2	6,9	7,9	8,5	9,9	10,8	12,4	13,3	14,2	l/s
	Water pressure drop recovery	10	12	15	9	11	11	13	18	15	11	14	15	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2	
A35W7 - W45	Cooling capacity	354	390	447	499	552	635	684	794	865	992	1082	1169	kW
	Total power input	107	121	133	147	161	187	200	233	251	283	313	333	kW
	EER	3,31	3,23	3,37	3,4	3,42	3,4	3,43	3,4	3,44	3,5	3,45	3,51	W/W
	HRE	7,58	7,41	7,69	7,76	7,79	7,74	7,8	7,76	7,84	7,95	7,86	7,97	W/W
	Water flow rate	17,1	18,8	21,5	24	26,5	30,6	33	38,3	41,7	47,8	52,2	56,3	l/s
	Water pressure drop	51	44	39	47	38	49	52	57	51	53	64	53	kPa
	Heating recovery capacity	456	505	574	639	705	813	874	1016	1104	1261	1380	1486	kW
	Water flow rate recovery	21,8	24,1	27,4	30,5	33,7	38,8	41,8	48,5	52,7	60,3	65,9	71	l/s
	Water pressure drop recovery	30	37	48	49	51	47	49	49	58	54	54	52	kPa


Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

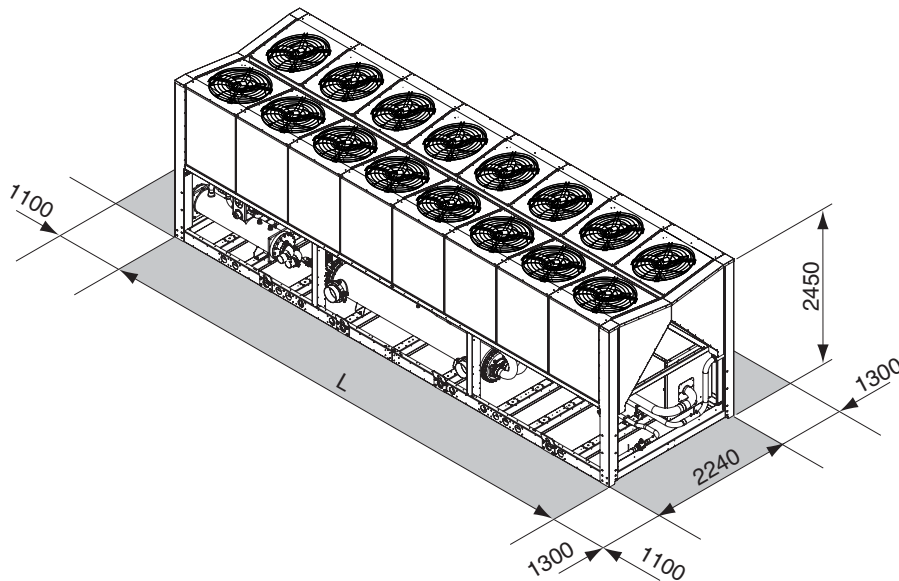

	330.2	370.2	420.2	470.2	510.2	590.2	670.2	740.2	800.2	900.2	1000.2	1150.2		
L (AB-AS-AX)	4070		5005			5950		6900		7810		10000		mm
Operating maximum weight*	3950	4116	4971	5303	5546	5687	6004	7345	7378	8589	9494	10220	kg	

* Weight refers to the unit IR with tank and pumping module 2 pumps.

> RMP²

AIR-WATER CHILLERS AND HEAT PUMPS FOR INDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Versions

VB	Base Version
VP	Pump version
VA	Tank version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressor mounted on damper supports, brazed plate heat

exchanger, thermostatic expansion valve, reverse cycle valve, centrifugal fans (plug fan), finned coil made of copper pipes and aluminium louvered fins. The circuit is protected by high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units are equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module

- not present (VB - base version)
- standard, high head or modulating pump (VP - pump version)
- tank and standard, high head or modulating pump (VA - tank version)

Tank electrical heater

- not present
- antifreeze
- integrative

Compressor starting

- standard (contactors)
- soft starter

Electrical loads protection

- fuses
- thermal magnetic circuit breakers

Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Manometer

Oil crankcase electrical heater (only for IR/BR unit, standard for IP/BP unit)

Pressure transducer

Coil protection kit for shipment

Outdoor air sensor

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,7	22,2	25,7	30,2	34,6	40,4	kW
	Power input	6,84	7,67	8,80	10,80	12,1	14,0	kW
	EER	2,88	2,89	2,92	2,80	2,86	2,88	W/W
	ESEER	3,23	3,24	3,28	3,13	3,20	3,23	W/W
	Water flow rate	3412	3848	4459	5233	5998	6988	l/h
	Pressure drops	32	41	37	40	39	37	kPa
IR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	18,9	21,3	24,7	29,0	33,3	38,8	kW
	Power input	7,34	8,25	9,43	11,57	13,1	15,1	kW
	EER	2,58	2,58	2,62	2,51	2,55	2,57	W/W
	ESEER	2,89	2,89	2,94	2,81	2,85	2,88	W/W
	Water flow rate	3275	3691	4286	5030	5763	6710	l/h
	Pressure drops	30	38	34	37	36	34	kPa
IP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,3	21,8	25,2	29,6	34,0	39,6	kW
	Power input	6,76	7,58	8,68	10,66	12,00	13,90	kW
	EER	2,85	2,87	2,91	2,78	2,83	2,85	W/W
	ESEER	3,20	3,22	3,26	3,11	3,17	3,19	W/W
	Water flow rate	3344	3778	4373	5132	5881	6850	l/h
	Pressure drops	31	40	35	38	38	36	kPa
A7W45	Heating capacity	20,8	23,4	27,2	32,2	37,0	41,8	kW
	Power input	6,53	7,35	8,52	10,54	11,82	13,28	kW
	COP	3,18	3,18	3,19	3,06	3,13	3,15	W/W
	Water flow rate	3543	3990	4648	5504	6312	7138	l/h
	Pressure drops	35	44	40	44	43	39	kPa
IP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	18,5	20,9	24,3	28,5	32,6	38,0	kW
	Power input	7,26	8,18	9,34	11,46	13,00	14,92	kW
	EER	2,55	2,55	2,60	2,48	2,51	2,55	W/W
	ESEER	2,86	2,86	2,91	2,78	2,81	2,85	W/W
	Water flow rate	3207	3622	4200	4928	5645	6572	l/h
	Pressure drops	28	36	32	35	35	33	kPa
A7W45	Heating capacity	19,7	22,3	25,9	30,8	35,2	39,8	kW
	Power input	6,32	7,05	8,21	10,16	11,40	12,80	kW
	COP	3,12	3,16	3,16	3,03	3,09	3,11	W/W
	Water flow rate	3357	3801	4424	5248	6009	6799	l/h
	Pressure drops	31	40	36	40	39	35	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	76	76	77	80	81	81	dB(A)
Sound pressure level at 1 meter	60	60	61	64	65	65	dB(A)
Sound pressure level at 5 meters	50	50	51	54	55	55	dB(A)
Sound pressure level at 10 meters	45	45	46	49	49	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	58	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	47	48	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3+N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	centrifugal (plug fan)						-
N° fans	1						n°
Tank volume	85						l
Hydraulic fittings	1"1/4 GAS						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	18,7	20,5	22,0	24,4	26,8	30,8	A
FLI - Full load power input at maximum tolerated conditions	11,3	12,8	14,1	15,5	17,0	19,3	kW
MIC - Maximum instantaneous current of the unit	118	128	141	158	162	193	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	61	67	74	85	87	106	A
Unit with standard modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	20,2	22,0	23,5	26,0	28,4	32,4	A
FLI - Full load power input at maximum tolerated conditions	11,9	13,4	14,7	16,3	17,8	20,1	kW
MIC - Maximum instantaneous current of the unit	120	130	143	160	164	195	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	86	89	107	A
Unit with high head modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	20,4	22,2	23,7	27,4	29,8	33,8	A
FLI - Full load power input at maximum tolerated conditions	12,2	13,6	15,0	17,1	18,6	20,9	kW
MIC - Maximum instantaneous current of the unit	120	130	143	161	165	196	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	88	90	109	A

Operating range

Temperatura	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	48	-15	42	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)

* with fans modulating control option (condensation / evaporation control)

Aeraulic performances

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Available static head	150	150	150	150	150	150	Pa

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.

The main functions available are :


- water temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode, automatic set point adjustment according to outdoor air temperature (if present "outdoor air sensor" accessory)
- dynamic defrost cycle management according to outdoor air temperature (if present "outdoor air sensor" accessory)
- alarm memory management and diagnostic
- fans management by means of continuous rotational speed

control

- pump management
- integrative electrical heaters management in heating mode
- compressor and pump operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

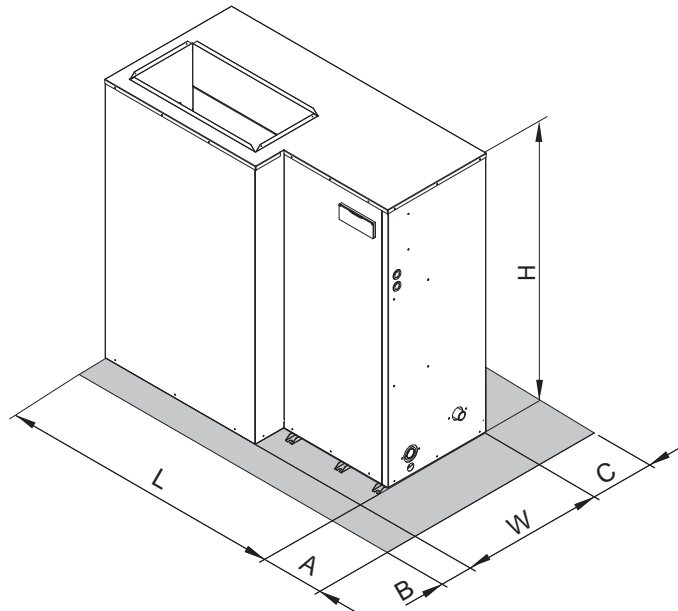

	19.1	22.1	26.1	30.1	35.1	40.1	
L		1494			1704		mm
W		744			744		mm
H		1453			1453		mm
A		400			400		mm
B		450			450		mm
C		200			200		mm
Maximum weight operation (VA Tank version)	384	387	406	408	434	436	kg

> RMP² HE

AIR-WATER CHILLERS AND HEAT PUMPS FOR INDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Versions

VB	Base Version
VP	Pump version
VA	Tank version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressor mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve, reverse cycle valve, centrifugal fans (plug fan), finned coil made of copper pipes and aluminium louvered fins. The circuit is pro-

ected by high and low pressure switches and differential pressure switch on the plate heat exchanger.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units are equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module

- not present (VB - base version)
- standard, high head or modulating pump (VP - pump version)
- tank and standard, high head or modulating pump (VA - tank version)

Integrative electrical heaters

- not present
- standard in the tank

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Electrical loads protection

- fuses
- thermal magnetic circuit breakers

Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Manometer

Oil crankcase electrical heater (only for IR/BR unit, standard for IP/BP unit)

Pressure transducer

Coil protection kit for shipment

Outdoor air sensor

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	20,3	22,7	26,4	31,5	35,5	41,4	kW
	Power input	6,49	7,25	8,36	10,09	11,3	13,0	kW
	EER	3,12	3,13	3,16	3,12	3,14	3,17	W/W
	ESEER	3,50	3,51	3,54	3,49	3,52	3,55	W/W
	Water flow rate	3512	3929	4566	5442	6140	7150	l/h
	Pressure drops	27	25	24	28	29	27	kPa
IR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,5	21,8	25,4	30,3	34,2	39,9	kW
	Power input	6,98	7,80	9,00	10,85	12,1	13,9	kW
	EER	2,79	2,80	2,82	2,79	2,81	2,87	W/W
	ESEER	3,13	3,13	3,16	3,13	3,15	3,22	W/W
	Water flow rate	3372	3771	4391	5235	5905	6890	l/h
	Pressure drops	25	23	22	26	27	25	kPa
IP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,9	22,3	25,9	30,9	34,8	40,5	kW
	Power input	6,42	7,17	8,25	9,96	11,20	12,95	kW
	EER	3,10	3,11	3,14	3,10	3,11	3,13	W/W
	ESEER	3,47	3,49	3,51	3,47	3,48	3,51	W/W
	Water flow rate	3442	3859	4478	5337	6020	7008	l/h
	Pressure drops	26	24	23	27	28	26	kPa
A7W45	Heating capacity	21,1	24,0	27,8	32,3	37,0	42,7	kW
	Power input	6,42	7,14	8,25	10,01	11,21	12,83	kW
	COP	3,29	3,36	3,37	3,22	3,29	3,33	W/W
	Water flow rate	3612	4096	4763	5517	6320	7310	l/h
	Pressure drops	29	27	26	29	31	28	kPa
IP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35W7	Cooling capacity	19,1	21,4	24,9	29,7	33,5	39,0	kW
	Power input	6,91	7,74	8,91	10,75	12,06	13,74	kW
	EER	2,76	2,77	2,79	2,76	2,77	2,84	W/W
	ESEER	3,09	3,10	3,13	3,09	3,11	3,18	W/W
	Water flow rate	3302	3700	4303	5129	5785	6748	l/h
	Pressure drops	24	22	21	25	26	24	kPa
A7W45	Heating capacity	20,1	22,9	26,6	31,0	35,2	40,8	kW
	Power input	6,23	6,90	8,00	9,70	10,87	12,42	kW
	COP	3,22	3,32	3,32	3,20	3,24	3,28	W/W
	Water flow rate	3422	3902	4533	5261	6016	6963	l/h
	Pressure drops	26	25	23	26	28	26	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

= Unit in **A CLASS**.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	76	76	77	80	81	81	dB(A)
Sound pressure level at 1 meter	60	60	61	64	65	65	dB(A)
Sound pressure level at 5 meters	50	50	51	54	55	55	dB(A)
Sound pressure level at 10 meters	45	45	46	49	49	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level ^(E)	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	58	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	47	48	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3+N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Plant side heat exchanger type	stainless steel brazed plates						-
Source side heat exchanger type	finned coil						-
Fans type	centrifugal (plug fan)						-
N° fans	1						n°
Tank volume	85						l
Hydraulic fittings	1"1/4 GAS						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	18,7	20,5	22,0	24,4	26,8	30,8	A
FLI - Full load power input at maximum tolerated conditions	11,3	12,8	14,1	15,5	17,0	19,3	kW
MIC - Maximum instantaneous current of the unit	118	128	141	158	162	193	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	61	67	74	85	87	106	A
Unit with standard modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	20,2	22,0	23,5	26,0	28,4	32,4	A
FLI - Full load power input at maximum tolerated conditions	11,9	13,4	14,7	16,3	17,8	20,1	kW
MIC - Maximum instantaneous current of the unit	120	130	143	160	164	195	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	86	89	107	A
Unit with high head modulating pump	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	20,4	22,2	23,7	27,4	29,8	33,8	A
FLI - Full load power input at maximum tolerated conditions	12,2	13,6	15,0	17,1	18,6	20,9	kW
MIC - Maximum instantaneous current of the unit	120	130	143	161	165	196	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	62	68	76	88	90	109	A

Operating range

Temperatura	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	50	-15	42	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)

* with fans modulating control option (condensation / evaporation control)

Aeraulic performances

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Available static head	150	150	150	150	150	150	Pa

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode, automatic set point adjustment according to outdoor air temperature (if present "outdoor air sensor" accessory)
- dynamic defrost cycle management according to outdoor air temperature (if present "outdoor air sensor" accessory)
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump management
- integrative electrical heaters management in heating mode
- compressor and pump operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

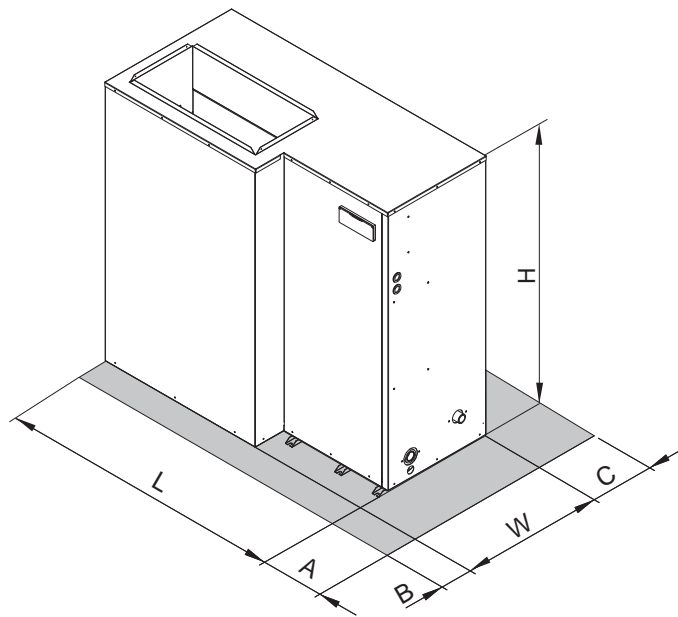

	19.1	22.1	26.1	30.1	35.1	40.1	
L		1494			1704		mm
W		744			744		mm
H		1453			1453		mm
A		400			400		mm
B		450			450		mm
C		200			200		mm
Maximum weight operation (VA Tank version)	399	402	426	433	459	461	kg

> RGC

AIR-WATER CHILLERS AND HEAT PUMPS FOR INDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option

for IR), reverse cycle valve, dehydrator filter, double inlet centrifugal fans with forward curved blades, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

(standard for IP)

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	45,0	53,0	58,1	68,2	78,1	90,3	101	111	125	142	157	179	198	kW
	Power input	15,7	18,8	20,8	24,1	28,0	32,5	35,9	39,9	45,1	51,5	57,1	64,6	71,6	kW
	EER	2,87	2,82	2,79	2,83	2,79	2,78	2,81	2,78	2,77	2,76	2,75	2,77	2,77	W/W
	ESEER	3,88	3,85	3,80	3,86	3,79	3,88	3,81	3,88	3,77	3,84	3,72	3,75	3,77	W/W
	Water flow rate	2,16	2,56	2,80	3,29	3,76	4,35	4,87	5,35	6,02	6,83	7,55	8,60	9,56	l/s
	Pressure drops	40	56	55	51	50	48	46	44	48	47	48	48	50	kPa
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	45,0	53,0	58,1	68,2	78,1	90,3	101	111	125	142	157	179	198	kW
	Power input	15,7	18,8	20,8	24,1	28,0	32,5	35,9	39,9	45,1	51,5	57,1	64,6	71,6	kW
	EER	2,87	2,82	2,79	2,83	2,79	2,78	2,81	2,78	2,77	2,76	2,75	2,77	2,77	W/W
	ESEER	3,88	3,85	3,80	3,86	3,79	3,88	3,81	3,88	3,77	3,84	3,72	3,75	3,77	W/W
	Water flow rate	2,16	2,56	2,80	3,29	3,76	4,35	4,87	5,35	6,02	6,83	7,55	8,60	9,56	l/s
	Pressure drops	40	56	55	51	50	48	46	44	48	47	48	48	50	kPa
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,5	52,4	57,0	66,7	73,6	88,5	98	109	121	137	153	177	196	kW
	Power input	15,5	19,0	20,7	24,1	27,0	32,3	35,7	39,8	44,5	50,3	56,3	63,5	71,2	kW
	EER	2,81	2,76	2,75	2,77	2,73	2,74	2,75	2,74	2,72	2,72	2,72	2,79	2,75	W/W
	ESEER	3,79	3,77	3,75	3,75	3,69	3,82	3,73	3,82	3,69	3,79	3,68	3,77	3,74	W/W
	Water flow rate	2,09	2,53	2,75	3,21	3,54	4,26	4,73	5,26	5,83	6,59	7,36	8,50	9,46	l/s
	Pressure drops	37	55	53	49	44	46	43	43	45	44	46	47	49	kPa
A7W45	Heating capacity	48,1	58,1	63,2	74,5	83,0	99,6	110	125	136	154	173	197	216	kW
	Power input	15,6	19,1	20,9	24,4	27,6	33,5	35,9	41,1	44,9	51,8	56,9	65,1	71,7	kW
	COP	3,08	3,04	3,02	3,05	3,01	2,97	3,06	3,04	3,03	2,97	3,04	3,03	3,01	W/W
	Water flow rate	2,28	2,75	2,99	3,53	3,93	4,72	5,21	5,92	6,45	7,31	8,17	9,32	10,2	l/s
	Pressure drops	45	65	63	59	55	57	53	54	55	54	56	56	57	kPa
IP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7	Cooling capacity	43,5	52,4	57,0	66,7	73,6	88,5	98	109	121	137	153	177	196	kW
	Power input	15,5	19,0	20,7	24,1	27,0	32,3	35,7	39,8	44,5	50,3	56,3	63,5	71,2	kW
	EER	2,81	2,76	2,75	2,77	2,73	2,74	2,75	2,74	2,72	2,72	2,72	2,79	2,75	W/W
	ESEER	3,79	3,77	3,75	3,75	3,69	3,82	3,73	3,82	3,69	3,79	3,68	3,77	3,74	W/W
	Water flow rate	2,09	2,53	2,75	3,21	3,54	4,26	4,73	5,26	5,83	6,59	7,36	8,50	9,46	l/s
	Pressure drops	37	55	53	49	44	46	43	43	45	44	46	47	49	kPa
A7W45	Heating capacity	48,1	58,1	63,2	74,5	83,0	99,6	110	125	136	154	173	197	216	kW
	Power input	15,6	19,1	20,9	24,4	27,6	33,5	35,9	41,1	44,9	51,8	56,9	65,1	71,7	kW
	COP	3,08	3,04	3,02	3,05	3,01	2,97	3,06	3,04	3,03	2,97	3,04	3,03	3,01	W/W
	Water flow rate	2,28	2,75	2,99	3,53	3,93	4,72	5,21	5,92	6,45	7,31	8,17	9,32	10,2	l/s
	Pressure drops	45	65	63	59	55	57	53	54	55	54	56	56	57	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.
A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C
A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C
A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C
A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level ^(E)	88	88	89	89	89	91	91	91	96	97	97	98	98	dB(A)
Sound pressure level at 1 meter	70	70	71	71	71	73	73	73	78	79	79	80	80	dB(A)
Sound pressure level at 5 meters	61	61	62	62	62	65	65	65	69	70	70	71	71	dB(A)
Sound pressure level at 10 meters	56	56	57	57	57	59	59	59	64	65	65	66	66	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level ^(E)	85	85	86	86	86	88	88	88	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	67	67	68	68	68	70	70	70	75	76	76	77	77	dB(A)
Sound pressure level at 5 meters	58	58	59	59	59	62	62	62	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	53	53	54	54	54	56	56	56	61	62	62	63	63	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3 - 50													V-ph-Hz
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Plant side heat exchanger type	stainless steel brazed plates													-
Source side heat exchanger type	finned coil													-
Fans type	centrifugal													-
N° fans	1			2			3			4			n°	
Tank volume	200			400			460						l	
Hydraulic fittings	2" VICTAULIC						2" 1/2 VICTAULIC						-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	43,2	48,8	56,7	62,1	73,0	80,5	95,0	103	117	145	158	188	199	A
FLI - Full load power input at maximum tolerated conditions	25,2	28,0	33,0	35,6	40,8	47,3	58,3	63,8	72,8	88,7	96,3	113	120	kW
MIC - Maximum instantaneous current of the unit	137	147	152	177	216	269	264	272	278	370	383	384	420	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	92,4	99,4	105	121	147	179	180	188	194	222	268	277	301	A
Unit with high head modulating pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	49,3	54,9	62,8	68,2	79,1	86,6	101	112	126	153	166	198	209	A
FLI - Full load power input at maximum tolerated conditions	28,7	31,5	36,5	39,1	44,3	50,8	61,8	68,4	77,3	93,2	101	119	126	kW
MIC - Maximum instantaneous current of the unit	143	153	158	183	222	275	270	281	287	378	392	394	430	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	98,5	105	111	127	153	185	186	197	203	231	277	287	311	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-10	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection fuccion

Aeraulic performance

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Available static head	150	150	150	150	150	150	150	150	150	150	150	150	150	Pa

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desuperheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	15,3	18,3	20,3	23,4	27,3	31,8	35,1	38,9	44	50,3	55,8	63	69,9	kW
	EER	3,05	3	2,98	3,03	2,97	2,95	2,99	2,96	2,95	2,94	2,92	2,94	2,95	W/W
	HRE	3,93	3,86	3,84	3,88	3,83	3,8	3,86	3,85	3,83	3,81	3,8	3,82	3,83	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54	kPa
	Heating recovery capacity	13,5	15,7	17,6	20	23,6	27,1	30,4	34,4	38,4	44	49,3	55,4	61,3	kW
	Water flow rate recovery	0,65	0,75	0,84	0,96	1,13	1,29	1,45	1,64	1,83	2,1	2,36	2,65	2,93	l/s
	Water pressure drop recovery	6	9	11	14	19	15	18	11	14	18	22	18	21	kPa
	IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35W7 - W45	Cooling capacity	45,3	54,5	59,3	69,3	76,5	92,1	102	113	126	143	159	183	204	kW
	Total power input	15,1	18,5	20,1	23,5	26,4	31,5	34,9	38,7	43,4	49,1	54,9	62,1	69,5	kW
	EER	3	2,94	2,94	2,95	2,9	2,92	2,93	2,92	2,9	2,91	2,89	2,95	2,94	W/W
	HRE	3,86	3,76	3,79	3,78	3,77	3,75	3,77	3,78	3,76	3,77	3,75	3,8	3,77	W/W
	Water flow rate	2,18	2,63	2,86	3,34	3,68	4,43	4,92	5,45	6,07	6,88	7,64	8,84	9,84	l/s
	Water pressure drop	41	59	57	53	48	50	47	46	49	48	49	51	53	kPa
	Heating recovery capacity	13	15,2	17	19,4	22,9	26,2	29,2	33,2	37,1	42,4	47,5	52,4	58,1	kW
	Water flow rate recovery	0,62	0,73	0,81	0,93	1,09	1,25	1,4	1,59	1,77	2,03	2,27	2,5	2,78	l/s
	Water pressure drop recovery	6	8	10	13	18	14	17	10	13	17	21	16	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35W7 - W45	Cooling capacity	46,8	55,1	60,3	71	81,1	93,8	105	115	130	148	163	185	206	kW
	Total power input	13,9	16,9	18,4	21,4	25,3	27,9	31,1	35	40	44,4	49,9	55,3	62,1	kW
	EER	3,36	3,25	3,28	3,31	3,2	3,36	3,38	3,29	3,25	3,33	3,26	3,35	3,32	W/W
	HRE	7,67	7,46	7,52	7,58	7,35	7,67	7,71	7,52	7,45	7,61	7,47	7,65	7,59	W/W
	Water flow rate	2,25	2,66	2,91	3,42	3,91	4,52	5,06	5,54	6,26	7,12	7,84	8,93	9,94	l/s
	Water pressure drop	43	60	59	55	54	52	50	47	52	51	52	52	54	kPa
	Heating recovery capacity	60	71,2	77,8	91,4	105	120	135	148	168	190	210	238	265	kW
	Water flow rate recovery	2,87	3,4	3,72	4,37	5,02	5,73	6,45	7,07	8,03	9,08	10	11,4	12,7	l/s
	Water pressure drop recovery	35	49	41	45	50	48	52	47	52	51	52	55	55	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heatingg



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

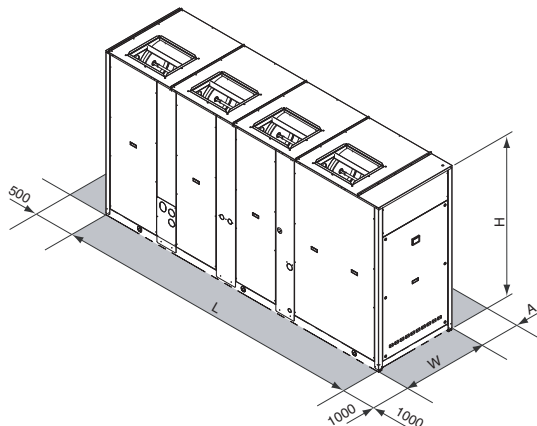

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322		4080		mm
W			954				1104			1104		1104		mm
H			1760				1760			2160		2160		mm
A				1600						2000				mm
Operating maximum weight*	1078	1082	1102	1143	1168	1684	1765	1825	2000	2042	2094	2423	2467	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RGC HE

AIR-WATER CHILLERS AND HEAT PUMPS FOR INDOOR INSTALLATION



Available range

Unit type

IR	Chiller
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up

Source temperature level

M	Medium temperature level
A	High temperature level

Unit description

This series of air-water chillers and heat pumps satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, brazed plate heat exchanger, thermostatic expansion valve (standard for IR) or electronic expansion valve (standard for IP / option

for IR), reverse cycle valve, dehydrator filter, double inlet centrifugal fans with forward curved blades, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches and differential pressure switch on the plate heat exchanger. The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Expansion valve

- thermostatic
- electronic (standard for IP)

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

(standard for IP)

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for IP)

High and low pressure gauges

High temperature thermostat

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	47,2	55,9	63,1	70,5	83,4	94,9	106	120	133	153	173	197	kW
	Power input	14,9	17,2	19,8	22,1	27,2	31,2	34,6	38,6	42,7	50,0	55,5	64,6	kW
	EER	3,17	3,25	3,19	3,19	3,07	3,04	3,06	3,11	3,11	3,06	3,12	3,05	W/W
	ESEER	4,26	4,39	4,29	4,34	4,12	4,22	4,15	4,32	4,21	4,26	4,22	4,11	W/W
	Water flow rate	2,26	2,69	3,03	3,39	4,00	4,56	5,11	5,78	6,40	7,36	8,31	9,46	l/s
	Pressure drops	24	34	33	41	31	32	34	33	35	35	38	39	kPa
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	47,2	55,9	63,1	70,5	83,4	94,9	106	120	133	153	173	197	kW
	Power input	14,9	17,2	19,8	22,1	27,2	31,2	34,6	38,6	42,7	50,0	55,5	64,6	kW
	EER	3,17	3,25	3,19	3,19	3,07	3,04	3,06	3,11	3,11	3,06	3,12	3,05	W/W
	ESEER	4,26	4,39	4,29	4,34	4,12	4,22	4,15	4,32	4,21	4,26	4,22	4,11	W/W
	Water flow rate	2,26	2,69	3,03	3,39	4,00	4,56	5,11	5,78	6,40	7,36	8,31	9,46	l/s
	Pressure drops	24	34	33	41	31	32	34	33	35	35	38	39	kPa
IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	45,3	53,6	60,7	67,8	81,3	92,4	103	115	128	147	166	191	kW
	Power input	14,6	17,1	19,4	21,7	26,7	30,2	33,8	37,8	41,8	48,5	54,3	62,8	kW
	EER	3,10	3,13	3,13	3,12	3,04	3,06	3,05	3,04	3,06	3,03	3,06	3,04	W/W
	ESEER	4,17	4,24	4,22	4,23	4,10	4,23	4,11	4,23	4,14	4,21	4,12	4,10	W/W
	Water flow rate	2,17	2,58	2,91	3,26	3,90	4,43	4,97	5,54	6,16	7,07	7,98	9,17	l/s
	Pressure drops	22	31	30	38	29	30	32	30	32	32	35	37	kPa
A7W45	Heating capacity	49,4	58,3	66,0	74,1	88,4	100	113	126	141	161	181	207	kW
	Power input	15,5	18,1	20,8	23,4	27,9	31,6	35,5	39,7	44,3	51,0	57,1	65,6	kW
	COP	3,19	3,22	3,17	3,17	3,17	3,16	3,18	3,17	3,18	3,16	3,17	3,16	W/W
	Water flow rate	2,35	2,77	3,13	3,52	4,20	4,77	5,35	5,97	6,69	7,64	8,60	9,84	l/s
	Pressure drops	26	36	35	44	34	35	37	35	38	38	41	42	kPa
IP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7	Cooling capacity	45,3	53,6	60,7	67,8	81,3	92,4	103	115	128	147	166	191	kW
	Power input	14,6	17,1	19,4	21,7	26,7	30,2	33,8	37,8	41,8	48,5	54,3	62,8	kW
	EER	3,10	3,13	3,13	3,12	3,04	3,06	3,05	3,04	3,06	3,03	3,06	3,04	W/W
	ESEER	4,17	4,24	4,22	4,23	4,10	4,23	4,11	4,23	4,14	4,21	4,12	4,10	W/W
	Water flow rate	2,17	2,58	2,91	3,26	3,90	4,43	4,97	5,54	6,16	7,07	7,98	9,17	l/s
	Pressure drops	22	31	30	38	29	30	32	30	32	32	35	37	kPa
A7W45	Heating capacity	49,4	58,3	66,0	74,1	88,4	100	113	126	141	161	181	207	kW
	Power input	15,5	18,1	20,8	23,4	27,9	31,6	35,5	39,7	44,3	51,0	57,1	65,6	kW
	COP	3,19	3,22	3,17	3,17	3,17	3,16	3,18	3,17	3,18	3,16	3,17	3,16	W/W
	Water flow rate	2,35	2,77	3,13	3,52	4,20	4,77	5,35	5,97	6,69	7,64	8,60	9,84	l/s
	Pressure drops	26	36	35	44	34	35	37	35	38	38	41	42	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)

_____ = Unit in A CLASS.

A35W7 = source : air in 35°C d.b. / plant : water in 12°C out 7°C

A35W18 = source : air in 35°C d.b. / plant : water in 23°C out 18°C

A7W45 = source : air in 7°C d.b. 6°C w.b. / plant : water in 40°C out 45°C

A7W35 = source : air in 7°C d.b. 6°C w.b. / plant : water in 30°C out 35°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level ^(E)	88	88	89	89	91	91	91	96	96	97	97	98	dB(A)
Sound pressure level at 1 meter	70	70	71	71	73	73	73	78	78	79	79	80	dB(A)
Sound pressure level at 5 meters	61	61	62	62	65	65	65	69	69	70	70	71	dB(A)
Sound pressure level at 10 meters	56	56	57	57	59	59	59	64	64	65	65	66	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level ^(E)	85	85	86	86	88	88	88	93	93	94	94	95	dB(A)
Sound pressure level at 1 meter	67	67	68	68	70	70	70	75	75	76	76	77	dB(A)
Sound pressure level at 5 meters	58	58	59	59	62	62	62	66	66	67	67	68	dB(A)
Sound pressure level at 10 meters	53	53	54	54	56	56	56	61	61	62	62	63	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Power supply	400 - 3 - 50												V-ph-Hz
Compressor type	scroll												-
N° compressors / N° refrigerant circuits	2 / 1												n°
Plant side heat exchanger type	stainless steel brazed plates												-
Source side heat exchanger type	finned coil												-
Fans type	centrifugal												-
N° fans	1			2			3			4			n°
Tank volume	200				400				460				l
Hydraulic fittings	2" VICTAULIC						2" 1/2 VICTAULIC						-

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
FLA - Full load current at maximum tolerated conditions	43,2	48,8	56,7	62,1	74,9	80,5	95,0	109	117	145	169	188	A
FLI - Full load power input at maximum tolerated conditions	25,2	28,0	33,0	35,6	41,9	47,3	58,3	67,3	72,8	88,7	103	113	kW
MIC - Maximum instantaneous current of the unit	137	147	152	177	218	269	264	278	278	370	394	384	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	92,4	99,4	105	121	148	179	180	194	194	222	279	277	A
Unit with high head modulating pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
FLA - Full load current at maximum tolerated conditions	49,3	54,9	62,8	68,2	81,0	86,6	101	118	126	153	179	198	A
FLI - Full load power input at maximum tolerated conditions	28,7	31,5	36,5	39,1	45,4	50,8	61,8	71,8	77,3	93,2	109	119	kW
MIC - Maximum instantaneous current of the unit	143	153	158	183	224	275	270	287	287	378	405	394	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	98,5	105	111	127	155	185	186	203	203	231	290	287	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	IR, BR, IP, BP	-10*	52**	-15	40*	(°C)
Water outlet temperature	IR, IP	5	25	30	55	(°C)
Water outlet temperature	BR, BP	-12	5	30	55	(°C)
Water outlet temperature (VD)	IR, BR, IP, BP	30	70	30	70	(°C)
Water outlet temperature (VR)	IR, BR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

** with ATC outdoor high temperature protection function

Aeraulic performance

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Available static head	150	150	150	150	150	150	150	150	150	150	150	150	150	Pa

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7 - W45	Cooling capacity	49,1	58,1	65,5	73,3	86,7	98,6	110	125	138	159	180	205	kW
	Total power input	14,5	16,7	19,4	21,5	26,6	30,5	33,8	37,7	41,6	48,8	54,1	63,1	kW
	EER	3,38	3,47	3,38	3,41	3,26	3,24	3,27	3,32	3,32	3,26	3,32	3,24	W/W
	HRE	4,36	4,48	4,36	4,4	4,21	4,18	4,22	4,28	4,29	4,21	4,29	4,19	W/W
	Water flow rate	2,36	2,79	3,15	3,53	4,17	4,74	5,3	6,02	6,64	7,64	8,65	9,84	l/s
	Water pressure drop	26	37	36	44	34	35	37	36	38	38	41	42	kPa
	Heating recovery capacity	14,2	16,9	19	21,3	25,1	28,6	32,1	36,2	40,3	46,3	52,3	59,4	kW
	Water flow rate recovery	0,68	0,81	0,91	1,02	1,2	1,37	1,53	1,73	1,93	2,21	2,5	2,84	l/s
	Water pressure drop recovery	7	10	13	16	21	16	20	12	15	20	25	20	kPa
	IP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2
A35W7 - W45	Cooling capacity	47,1	55,8	63,1	70,4	84,6	96	107	120	133	153	173	199	kW
	Total power input	14,2	16,6	18,9	21,2	26	29,5	33	36,8	40,7	47,3	53,1	61,4	kW
	EER	3,32	3,36	3,33	3,33	3,25	3,25	3,25	3,27	3,27	3,24	3,26	3,24	W/W
	HRE	4,28	4,34	4,3	4,3	4,19	4,2	4,2	4,21	4,22	4,18	4,2	4,17	W/W
	Water flow rate	2,26	2,68	3,03	3,39	4,06	4,61	5,16	5,78	6,4	7,36	8,31	9,56	l/s
	Water pressure drop	24	34	33	41	32	33	35	33	35	35	38	40	kPa
	Heating recovery capacity	13,6	16,2	18,3	20,5	24,5	27,9	31,1	34,7	38,6	44,4	50,1	57,5	kW
	Water flow rate recovery	0,65	0,77	0,87	0,98	1,17	1,33	1,49	1,66	1,84	2,12	2,39	2,75	l/s
	Water pressure drop recovery	7	9	12	14	20	16	19	11	14	18	23	19	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35W7 - W45	Cooling capacity	49,1	58,1	65,5	73,3	86,7	98,6	110	125	138	159	180	205	kW
	Total power input	13,2	15,4	17,4	19,5	22,8	26,6	29,9	33,7	37,7	43	48,2	55,4	kW
	EER	3,72	3,76	3,77	3,75	3,81	3,72	3,7	3,71	3,66	3,7	3,73	3,7	W/W
	HRE	8,39	8,47	8,49	8,46	8,55	8,39	8,35	8,37	8,27	8,36	8,42	8,34	W/W
	Water flow rate	2,36	2,79	3,15	3,53	4,17	4,74	5,3	6,02	6,64	7,64	8,65	9,84	l/s
	Water pressure drop	26	37	36	44	34	35	37	36	38	38	41	42	kPa
	Heating recovery capacity	61,7	72,7	82,1	91,9	108	124	139	157	174	200	226	257	kW
	Water flow rate recovery	2,95	3,47	3,92	4,39	5,16	5,92	6,64	7,5	8,31	9,56	10,8	12,3	l/s
	Water pressure drop recovery	34	47	42	41	48	47	52	49	51	50	54	53	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heatingg



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

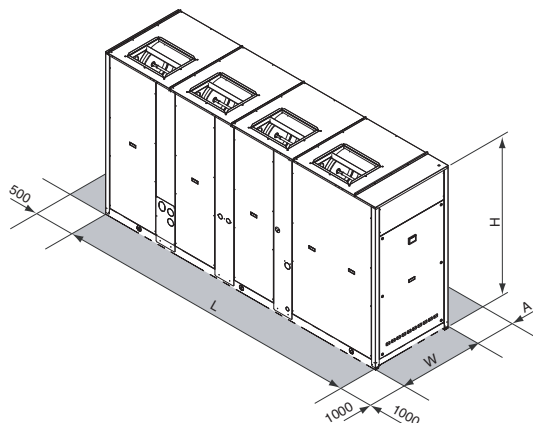

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
L		2480				3322			3322		4080		mm
W		954				1104			1104		1104		mm
H		1760				1760			2160		2160		mm
A		1600							2000				mm
Operating maximum weight*	1121	1125	1146	1189	1670	1751	1836	2051	2080	2124	2478	2520	kg

* Weight refers to the unit IP with tank and pumping module 2 pumps.

> RGA FC freecooling

AIR-WATER CHILLERS
FOR OUTDOOR INSTALLATION



NEW



Available range

Unit type

IR	Chiller
BR	Chiller Brine

Version

VB	Base version
VD	Desuperheater version
VR	Total recovery version

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Source temperature level

M	Medium temperature level
---	--------------------------

Unit description

This series of **air-water high-efficiency chillers with Free Cooling** function is the most convenient choice to meet the needs of plants with cold water demand constant throughout the year and then also during the colder months. Just in the winter season - due to the high temperature difference between the outside air and the water to be cooled- is enhanced the advantage of the chillers with free cooling.

The use of high-efficiency chillers with Free Cooling function allows **annual energy savings of up to 40%** compared to a solution with traditional chillers.

All units are suitable for outdoor installation. The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports and complete with crankcase heaters, brazed plate heat

exchanger, electronic expansion valve, dehydrator filter, liquid and humidity sight-glass, finned coil made of copper tubes with sub-cooling section and aluminum louvered fins. The circuit also includes copper pipes (with pressure taps of service and anti-condensation insulation), **low and high pressure transducers**, gas safety valve, high pressure switches, differential pressure switch on the plate heat exchanger.

The free cooling hydraulic circuit consists of a water coil made of copper tubes and aluminum louvered fins, 3-way motorized ball valve, safety valve, pressure gauge, air vent and water drain valves.

The plate heat exchanger and all the hydraulic pipes are thermally insulated in order to avoid condensate generation and to reduce thermal losses.

All units are also equipped as standard with **EC axial fans** driven by brushless motors and therefore with variable speed control of the fans that allows to optimize the operation of the unit during the intermediate seasons - when the load is satisfied only by the compressors- ensuring an accurate control of the condensing pressure and during both cold months- when the load is satisfied only by the free cooling- to adjust with precision and efficiency of the cooling capacity supplied to the plant.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, **circuit breakers to protect compressors and fans**, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with **IP54** minimum protection degree.

All the units are accurately built and individually tested in the factory. Only electric and hydraulic connections are required for installation.

Options

Storing and pumping module available in the configurations :

- Storage tank arranged as buffer on the flow or as primary-secondary buffer
- 1 or 2 pumps
- standard or high head pump
- modulating pump

Compressor starting

- standard (contactors)
- soft starter

Compressor power factor correction

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Tank antifreeze electrical heater

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

High and low pressure gauges

High temperature thermostat

Water flow switch

NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A30B10 FREE COOLING OFF (ONLY CHILLER)	Cooling capacity	53,3	62,9	68,9	80,9	92,6	107	120	132	148	168	186	215	235	kW
	Power input	15,4	18,3	20,8	23,9	28,7	32,6	35,8	39,8	44,6	51,4	56,8	64,7	71,3	kW
	EER	3,45	3,44	3,31	3,38	3,22	3,29	3,35	3,31	3,33	3,27	3,27	3,32	3,30	W/W
	Water flow rate	2,80	3,31	3,62	4,25	4,86	5,62	6,30	6,92	7,79	8,84	9,77	11,28	12,36	l/s
	Pressure drops	90	100	120	143	160	100	117	128	153	117	133	143	153	kPa
	Sound power level*	82	82	83	84	84	85	85	85	86	87	87	88	88	dB(A)
	Sound pressure level at 1 meter*	64	64	65	66	66	67	67	67	68	68	68	69	69	dB(A)
	Sound pressure level at 5 meters*	55	55	56	57	57	58	58	58	59	60	60	61	61	dB(A)
	Sound pressure level at 10 meters*	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
A(TFC)B10 FREE COOLING ON (ONLY FANS)	TFC	2,4	0,2	2,2	0,0	0,2	3,6	2,2	1,0	0,5	1,2	0,4	2,3	1,1	°C
	Cooling capacity	53,3	62,9	68,9	80,9	92,6	107	120	132	148	168	186	215	235	kW
	Power input	1,5	1,5	2,7	2,7	3,6	5,3	5,3	5,3	5,3	8,0	8,0	10,6	10,6	kW
	EER	35,5	41,9	25,5	30,0	25,7	20,2	22,6	24,9	28,0	21,2	23,4	20,3	22,2	W/W
	Water flow rate	2,80	3,31	3,62	4,25	4,86	5,62	6,30	6,92	7,79	8,84	9,77	11,28	12,36	l/s
	Pressure drops	86	95	113	134	153	99	115	126	138	147	161	163	174	kPa
	Sound power level*	77	77	79	80	81	82	82	83	84	86	86	87	87	dB(A)
	Sound pressure level at 1 meter*	59	59	61	62	63	64	64	65	66	67	67	68	68	dB(A)
	Sound pressure level at 5 meters*	50	50	52	53	54	55	55	56	57	59	59	60	60	dB(A)
Sound pressure level at 10 meters*	45	45	47	48	49	50	50	51	52	54	54	55	55	dB(A)	
IR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A30B10 FREE COOLING OFF (ONLY CHILLER)	Cooling capacity	51,1	60,4	66,2	77,7	88,8	103	115	126	142	161	178	206	226	kW
	Power input	15,9	18,9	21,1	24,5	29,2	32,6	36,1	40,3	45,4	51,7	57,4	64,7	71,8	kW
	EER	3,22	3,19	3,13	3,17	3,04	3,15	3,19	3,14	3,13	3,12	3,11	3,18	3,14	W/W
	Water flow rate	2,69	3,17	3,48	4,08	4,67	5,40	6,05	6,65	7,48	8,48	9,37	10,83	11,87	l/s
	Pressure drops	83	92	111	132	147	92	108	118	141	108	123	132	141	kPa
	Sound power level*	79	79	80	81	81	82	82	82	83	84	84	85	85	dB(A)
	Sound pressure level at 1 meter*	61	61	62	63	63	64	64	64	65	65	65	66	66	dB(A)
	Sound pressure level at 5 meters*	52	52	53	54	54	55	55	55	56	57	57	58	58	dB(A)
	Sound pressure level at 10 meters*	47	47	48	49	49	50	50	50	51	52	52	53	53	dB(A)
A(TFC)B10 FREE COOLING ON (ONLY FANS)	TFC	0,9	-1,7	0,6	-1,9	-1,7	2,1	0,6	-0,8	-1,4	-0,6	-1,4	0,7	-0,7	°C
	Cooling capacity	51,1	60,4	66,2	77,7	88,8	103	115	126	142	161	178	206	226	kW
	Power input	1,0	1,0	1,8	1,8	2,3	3,4	3,4	3,4	3,4	5,2	5,2	6,9	6,9	kW
	EER	52,5	61,9	37,7	44,3	38,0	29,8	33,4	36,7	41,3	31,2	34,5	29,9	32,8	W/W
	Water flow rate	2,69	3,17	3,48	4,08	4,67	5,40	6,05	6,65	7,48	8,48	9,37	10,83	11,87	l/s
	Pressure drops	79	88	104	123	141	91	106	116	127	135	149	150	161	kPa
	Sound power level*	74	74	76	77	77	78	78	79	80	82	82	83	83	dB(A)
	Sound pressure level at 1 meter*	56	56	58	59	59	60	60	61	62	63	63	64	64	dB(A)
	Sound pressure level at 5 meters*	47	47	49	50	50	51	51	52	53	55	55	56	56	dB(A)
Sound pressure level at 10 meters*	42	42	44	45	45	46	46	47	48	50	50	51	51	dB(A)	
IR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A30B10 FREE COOLING OFF (ONLY CHILLER)	Cooling capacity	50,1	59,1	64,8	76,1	87,0	101	113	124	139	158	175	202	221	kW
	Power input	15,9	19,1	20,6	24,5	28,8	31,5	35,8	40,1	45,4	50,1	57,1	62,8	71,2	kW
	EER	3,15	3,10	3,15	3,10	3,02	3,19	3,15	3,08	3,07	3,16	3,06	3,21	3,10	W/W
	Water flow rate	2,63	3,11	3,40	4,00	4,57	5,29	5,93	6,51	7,32	8,31	9,18	10,61	11,62	l/s
	Pressure drops	79	88	106	127	141	88	103	113	135	103	118	126	135	kPa
	Sound power level*	77	77	78	79	79	80	80	80	81	82	82	83	83	dB(A)
	Sound pressure level at 1 meter*	59	59	60	61	61	62	62	62	63	63	63	64	64	dB(A)
	Sound pressure level at 5 meters*	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
	Sound pressure level at 10 meters*	45	45	46	47	47	48	48	48	49	50	50	51	51	dB(A)
A(TFC)B10 FREE COOLING ON (ONLY FANS)	TFC	-0,7	-3,5	-0,9	-3,7	-3,5	0,7	-1,0	-2,5	-3,1	-2,3	-3,2	-0,9	-2,4	°C
	Cooling capacity	50,1	59,1	64,8	76,1	87,0	101	113	124	139	158	175	202	221	kW
	Power input	0,6	0,6	0,6	1,1	1,1	1,5	2,2	2,2	2,2	2,2	3,4	3,4	4,5	kW
	EER	83,5	93,3	102,2	66,7	76,3	66,1	50,4	55,3	62,2	70,6	52,0	60,1	49,4	W/W
	Water flow rate	2,63	3,11	3,40	4,00	4,57	5,29	5,93	6,51	7,32	8,31	9,18	10,61	11,62	l/s
	Pressure drops	76	84	100	118	135	87	102	112	122	130	142	144	154	kPa
	Sound power level*	71	71	73	74	74	75	75	76	77	79	79	80	80	dB(A)
	Sound pressure level at 1 meter*	53	53	55	56	56	57	57	58	59	60	60	61	61	dB(A)
	Sound pressure level at 5 meters*	44	44	46	47	47	48	48	49	50	52	52	53	53	dB(A)
Sound pressure level at 10 meters*	39	39	41	42	42	43	43	44	45	47	47	48	48	dB(A)	

The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
TFC (Total Free Cooling temperature) = Outdoor air temperature that allows the unit to meet the rated load with only Free Cooling
A30B10: source : air in 30°C d.b.
 brine plant (water + ethylene glycol 30%): in 15°C out 10°C
ATFCB10: source : air in TFC (Total Free Cooling temperature)°C d.b.
 brine plant (water + ethylene glycol 30%): out 10°C

*: Acoustic performance:
 Unit placed in free field on reflecting surface (directional factor equal to 2).
 The sound power level is measured according to ISO 9614 standard.
 The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3 - 50													V-ph-Hz
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Plant side heat exchanger type	stainless steel brazed plates													-
Source side heat exchanger type	finned coil													-
Freecooling side heat exchanger type	finned coil													-
Expansion valve	EXV (electronic expansion valve)													type
Fans type	EC axial													-
N° fans	2	3			2			3	4			n°		
Tank volume	200				400				460				l	
Freecooling valve	3-way motorized ball valve													type
Hydraulic fittings	2" VICTAULIC					2" 1/2 VICTAULIC								-

* to facilitate the operation of the hydraulic connection, the units are supplied complete with Victaulic hydraulic fittings.

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	36,9	40,1	44,8	51,8	59,8	75,2	89,8	97,7	106	123	136	160	170	A
FLI - Full load power input at maximum tolerated conditions	22,3	25,5	28,3	31,4	35,9	45,9	56,2	61,7	67,2	77,8	85,3	98,0	105	kW
MIC - Maximum inrush current of the unit	131	146	165	174	209	264	260	260	268	349	362	356	393	A
MIC SS - Maximum inrush current of the unit with soft starter options	79	88	99	104	125	158	156	156	161	210	217	214	236	A
Unit with standard pump	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	43,0	46,2	50,9	57,9	65,9	81,3	95,9	106	114	132	145	170	188	A
FLI - Full load power input at maximum tolerated conditions	25,8	28,9	31,8	34,8	39,4	49,3	59,7	66,3	71,8	82,4	89,9	104	115	kW
MIC - Maximum inrush current of the unit	138	152	172	180	215	270	266	268	276	358	371	367	410	A
MIC SS - Maximum inrush current of the unit with soft starter options	85	94	105	110	131	164	162	165	169	218	226	224	253	A
Unit with high head modulating pump	40.2*	50.2*	60.2*	70.2*	80.2*	90.2	100.2	115.2*	130.2*	145.2*	160.2*	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	45,6	48,8	53,5	60,5	68,5	83,9	98,5	108	116	134	147	173	192	A
FLI - Full load power input at maximum tolerated conditions	26,9	30,0	32,9	35,9	40,4	50,4	60,8	68,0	73,5	84,1	91,6	106	117	kW
MIC - Maximum inrush current of the unit	140	155	174	183	218	272	268	270	278	360	373	370	414	A
MIC SS - Maximum inrush current of the unit with soft starter options	88	96	108	113	134	167	165	166	171	220	228	227	257	A

* these models can only be equipped with 1 pump

Operative range

Temperature	Unit type	Cooling		
		min	max	
Outdoor air inlet temperature	IR, BR	-20	46 (50*)	(°C)
Plant site water outlet temperature	IR	5	25	(°C)
Plant site water outlet temperature	BR	-12	5	(°C)
Recovery water outlet temperature (VD)	IR, BR	30	70	(°C)
Recovery water outlet temperature (VR)	IR, BR	30	55	(°C)

* with ATC outdoor high temperature protection function

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The Total Recovery Version (VR) allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A30B10 FREE COOLING OFF (ONLY CHILLER)	Cooling capacity	55.4	65.4	71.7	84.1	96.3	111	125	137	154	175	193	223	245	kW
	Total power input	16.5	19.3	23.0	26.0	31.6	37.0	40.2	44.0	48.7	58.1	63.3	73.6	80.1	kW
	EER	3.36	3.39	3.12	3.24	3.05	3.00	3.10	3.11	3.17	3.01	3.05	3.03	3.05	W/W
	HRE	4.28	4.34	4.02	4.15	3.95	3.88	3.99	4.01	4.07	3.89	3.95	3.91	3.94	W/W
	Water flow rate	2.91	3.44	3.77	4.42	5.06	5.85	6.56	7.20	8.10	9.19	10.16	11.74	12.86	l/s
	Water pressure drop	97	108	130	155	173	108	126	138	166	127	144	154	165	kPa
	Heating recovery capacity	15.3	18.1	20.7	23.8	28.5	32.4	35.6	39.5	44.2	51.1	56.4	64.3	70.9	kW
	Water flow rate recovery	0.73	0.87	0.99	1.14	1.36	1.55	1.70	1.89	2.11	2.44	2.70	3.07	3.39	l/s
	Water pressure drop recovery	7	10	14	17	24	20	23	30	17	24	28	24	27	kPa

Total Recovery Version (VR) - NOMINAL performances

IR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A30B10 FREE COOLING OFF (ONLY CHILLER)	Cooling capacity	55.9	66.1	72.4	85.0	97.2	112	126	138	156	177	195	225	247	kW
	Total power input	13.4	16.1	17.4	20.4	24.1	26.2	29.3	33.1	37.7	41.7	46.9	51.9	58.3	kW
	EER	4.18	4.10	4.16	4.16	4.03	4.29	4.29	4.18	4.13	4.23	4.16	4.34	4.24	W/W
	HRE	9.32	9.15	9.28	9.28	9.01	9.54	9.54	9.31	9.21	9.41	9.27	9.64	9.43	W/W
	Water flow rate	2.94	3.47	3.80	4.46	5.11	5.91	6.62	7.27	8.18	9.28	10.25	11.85	12.98	l/s
	Water pressure drop	99	110	132	158	176	110	129	141	169	129	147	157	169	kPa
	Heating recovery capacity	68.6	81.4	88.9	104	120	137	154	170	191	216	240	275	302	kW
	Water flow rate recovery	3.3	3.9	4.2	5.0	5.7	6.6	7.3	8.1	9.1	10.3	11.4	13.1	14.4	l/s
	Water pressure drop recovery	45	64	54	58	63	61	66	60	66	66	67	68	69	kPa

The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit.

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input.

A30B10-W45: source : air in 30°C d.b.

brine plant (water + ethylene glycol 30%): in 15°C out 10°C

recovery : water in 40°C out 45°C

W10-W45:

brine plant (water + ethylene glycol 30%): in 15°C out 10°C

recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Free Cooling smart management depending on outdoor air and water plant temperatures
- Integrated management of the electronic expansion valve
- Integrated management for day/week working scheduling
- Sound management
- Climatic control
- Economy function
- Demand Limit
- Remote Stand by
- Alarms history



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

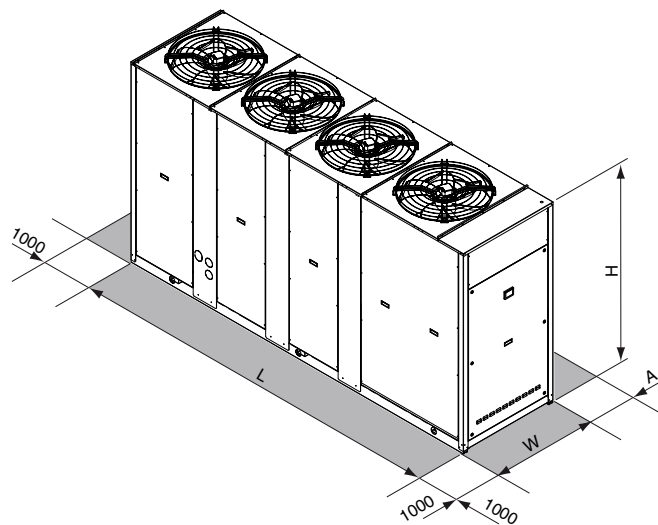

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322		4080		mm
W			1077				1267			1267		1267		mm
H			1930				1930			2193		2193		mm
A			1600							2000				mm
Operating maximum weight*	1185	1193	1216	1248	1302	1861	1941	2076	2193	2250	2347	2773	2800	kg

* Weight refers to the unit with tank and pumping module 2 pumps.

> RGW

WATER-WATER CHILLERS AND HEAT PUMPS FOR INDOOR INSTALLATION



Unit with closing panels

Available range

Unit type

IR	Chiller
IW	Heat pump (reversible on the water side)
IP	Heat pump (reversible on the refrigerant side)
BR	Chiller Brine
BW	Heat pump Brine (reversible on the water side)
BP	Heat pump Brine (reversible on the refrigerant side)

Version

VB	Base version
----	--------------

Acoustic setting up

AB	Base setting up
AS	Low noise setting up
AX	eXtra low noise setting up

Unit description

This series of water-water chillers and heat pumps satisfies the cooling and heating requirements of commercial and industrial plants of medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants, radiant floor plants and high efficiency radiators plants.

The refrigerant circuit is equipped with 2 scroll compressors, mounted on rubber vibration-damper supports, plant side heat exchanger brazed plate-type in stainless steel (AISI 316), complete with thermal insulation shell and differential pressure switch, source side exchanger brazed plate-type in stainless steel (AISI 316), complete with thermal insulation (IW, IP, BW, BP only) and differential pressure switch. (IP, BP only), thermostatic

expansion valve or electronic expansion valve (standard for IP, BP), 4-way valve, dehydrator filter, refrigerant circuit protected by refrigerant safety valve, low and high pressure switches, electrical panel for power and control complete with main breaker power supply with door lock function microprocessor controller with keyboard-display, and phase sequence controller (standard). When developing the range special attention has been paid to the choice of heat exchangers in order to obtain high efficiencies at full and partial loads to maximise the seasonal efficiency rating (ESEER) and therefore reduce consumption and running costs. The units can be chosen in Basic setting up (AB) (unit without closing panels), Low noise setting up (AS), featuring closing panels coated with acoustic material, Extra Low noise setting up (AX) featuring closing panels coated with superior acoustic material and soundproofing jackets on the compressors.

A wide range of accessories completes the commercial offer. These include pumping modules with 1 or 2 pumps available with standard or high head with a maximum of 4 pumps: 2 on plant side and 2 on source side.

The electronic controller can manage the various condensation control systems of the numerous applications required, enabling the control of 2-way or 3-way modulating valves (also offered as accessories) or the control of pumps under INVERTER. The units can therefore be combined with liquid coolers (dry-coolers), cooling towers, geothermal boreholes or use for water cooling city or well water. All the units are carefully built in compliance with the current regulations and individually tested. Installation therefore only requires the electrical and hydraulic connection.

Options

Pumping Modules

Available on various configurations:

- 1 or 2 pumps plant side
- 1 or 2 pumps source side
- pumps standard, high and extra high pressure head

Expansion valve

- thermostatic
- electronic (standard for IP, BP)

Suitable for outdoor installation

Accessories

Rubber vibration dampers

Remote controller

Serial Interface Modbus-RS 485

Programmer clock

Phase sequence and voltage controller

Low temperature kit

High and low pressure gauges

High temperature thermostat

Compressors shut-off valves

(for IR, BR, IW, BW only)

Outdoor air sensor

Water flow switch

Victaulic hydraulic fittings

Victaulic bends

Victaulic water shut-off valves

Victaulic water filter

2-way valve for cond./evap control

3-way valve for cond./evap control

Compressors start-up with soft starter

Compressors power factor correction

Electrical load protection with thermal magnetic circuit breakers

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
W30W7	Cooling capacity	69,5	78,5	91,4	104,3	117,2	132,1	146,9	168,8	190,5	214,3	238,1	kW
	Power input	16,4	18,1	21,9	25,2	28,6	32,3	36,3	41,3	46,4	53,0	59,7	kW
	EER	4,23	4,34	4,17	4,14	4,10	4,09	4,05	4,09	4,11	4,04	3,99	W/W
	ESEER	5,22	5,26	5,07	5,04	5,02	5,03	5,05	5,03	5,07	5,03	5,04	W/W
	Water flow rate plant side	3,3	3,8	4,4	5,0	5,6	6,4	7,1	8,1	9,2	10,3	11,5	l/s
	Pressure drops plant side	47	38	40	41	44	42	45	46	48	48	49	kPa
	Water flow rate source side	4,0	4,5	5,3	6,1	6,8	7,7	8,6	9,8	11,1	12,5	13,9	l/s
	Pressure drops source side	68	55	59	60	65	62	66	67	70	71	72	kPa
IW		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
W30W7	Cooling capacity	69,5	78,5	91,4	104,3	117,2	132,1	146,9	168,8	190,5	214,3	238,1	kW
	Power input	16,4	18,1	21,9	25,2	28,6	32,3	36,3	41,3	46,4	53,0	59,7	kW
	EER	4,23	4,34	4,17	4,14	4,10	4,09	4,05	4,09	4,11	4,04	3,99	-
	ESEER	5,22	5,26	5,07	5,04	5,02	5,03	5,05	5,03	5,07	5,03	5,04	-
	Water flow rate plant side	3,34	3,77	4,40	5,02	5,64	6,35	7,07	8,12	9,17	10,32	11,47	l/s
	Pressure drops plant side	47	38	40	41	44	42	45	46	48	48	49	kPa
	Water flow rate source side	4,03	4,54	5,32	6,07	6,83	7,71	8,58	9,84	11,09	12,52	13,94	l/s
	Pressure drops source side	68	55	59	60	65	62	66	67	70	71	72	kPa
W10W45	Heating capacity	78,7	87,6	103,8	117,9	132,1	149,2	166,5	190,7	215,0	242,3	270,6	kW
	Power input	20,6	22,5	27,1	30,9	34,8	39,2	44,1	50,2	56,5	63,8	71,4	kW
	COP	3,81	3,90	3,84	3,82	3,80	3,81	3,78	3,80	3,81	3,80	3,79	-
	Water flow rate plant side	3,73	4,16	4,92	5,59	6,26	7,07	7,88	9,03	10,18	11,47	12,80	l/s
	Pressure drops plant side	58	46	50	51	54	52	56	57	59	59	61	kPa
	Water flow rate source side	4,03	4,54	5,32	6,07	6,83	7,71	8,58	9,84	11,09	12,52	13,94	l/s
Pressure drops source side	68	55	59	60	65	62	66	67	70	71	72	kPa	
IP		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
W30W7	Cooling capacity	68,1	77,0	89,6	102,3	114,9	129,5	144,0	165,4	186,8	210,1	233,4	kW
	Power input	16,2	17,9	21,6	24,9	28,2	31,8	35,8	40,7	45,7	52,3	58,9	kW
	EER	4,20	4,31	4,14	4,11	4,07	4,07	4,03	4,07	4,09	4,02	3,96	-
	ESEER	5,16	5,20	5,02	5,01	5,00	5,01	5,02	5,00	5,02	5,00	5,01	-
	Water flow rate plant side	3,3	3,7	4,3	4,9	5,5	6,2	6,9	8,0	9,0	10,1	11,2	l/s
	Pressure drops plant side	45	36	38	39	42	40	43	44	46	46	47	kPa
	Water flow rate source side	3,95	4,45	5,22	5,96	6,71	7,57	8,43	9,66	10,89	12,29	13,69	l/s
	Pressure drops source side	66	53	56	58	62	60	64	65	68	68	70	kPa
W10W45	Heating capacity	77,7	86,6	102,8	116,8	130,8	147,7	165,4	188,8	212,8	239,8	267,9	kW
	Power input	20,7	22,5	27,1	31,0	34,9	39,3	44,2	50,3	56,4	64,0	71,6	kW
	COP	3,76	3,85	3,80	3,77	3,75	3,76	3,74	3,76	3,77	3,75	3,74	-
	Water flow rate plant side	3,7	4,1	4,9	5,5	6,2	7,0	7,8	8,9	10,1	11,4	12,7	l/s
	Pressure drops plant side	57	45	49	50	53	51	55	56	58	58	60	kPa
	Water flow rate source side	3,95	4,45	5,22	5,96	6,71	7,57	8,43	9,66	10,89	12,29	13,69	l/s
Pressure drops source side	66	53	56	58	62	60	64	65	68	68	70	kPa	

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 = Unit in **A CLASS**.

W30W7 = source : water in 30°C out 35°C / plant : water in 12°C out 7°C
W10W45 = source : water in 10°C / plant : water in 40°C out 45°C

Acoustic performances

Base setting up (AB)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level ^(E)	75	76	77	77	77	78	78	79	79	80	80	dB(A)
Sound pressure level at 1 meter	59	60	61	61	61	62	62	63	63	64	64	dB(A)
Sound pressure level at 5 meters	49	50	51	51	51	52	52	53	53	54	54	dB(A)
Sound pressure level at 10 meters	44	45	46	46	46	47	47	48	48	49	49	dB(A)
Low noise setting up (AS)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level ^(E)	71	72	73	73	73	74	74	75	75	76	76	dB(A)
Sound pressure level at 1 meter	55	56	57	57	57	58	58	59	59	60	60	dB(A)
Sound pressure level at 5 meters	45	46	47	47	47	48	48	49	49	50	50	dB(A)
Sound pressure level at 10 meters	40	41	42	42	42	43	43	44	44	45	45	dB(A)
eXtra low noise setting up (AX)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level ^(E)	67	68	69	69	69	70	70	71	71	72	72	dB(A)
Sound pressure level at 1 meter	51	52	53	53	53	54	54	55	55	56	56	dB(A)
Sound pressure level at 5 meters	41	42	43	43	43	44	44	45	45	46	46	dB(A)
Sound pressure level at 10 meters	36	37	38	38	38	39	39	40	40	41	41	dB(A)

(E): EUROVENT certified data

The acoustic performances are referred to units operating in cooling mode at nominal conditions W30/W7.
 Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Power supply	400 - 3 - 50											V-ph-Hz
Compressor type	scroll											-
N° compressors / N° refrigerant circuits	2 / 1											n°
Plant side heat exchanger type	stainless steel brazed plates											-
Source side heat exchanger type	stainless steel brazed plates											-
IN/OUT Plant side hydraulic fittings	2" 1/2 VICTAULIC											"
IN/OUT Source side hydraulic fittings	2" 1/2 VICTAULIC											"

Electrical data

Standard unit	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
FLA - Full load current at maximum tolerated conditions	45	51	62	68	74	82	90	105	120	142	164	A
FLI - Full load power input at maximum tolerated conditions	26	29	34	40	45	50	55	63	72	83	93	kW
MIC - Maximum instantaneous current of the unit	141	166	204	256	262	309	317	355	370	454	476	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	93	110	135	166	172	200	208	231	246	296	318	A
Unit with high head modulating pump	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
FLA - Full load current at maximum tolerated conditions	60	66	77	83	89	103	111	129	144	169	191	A
FLI - Full load power input at maximum tolerated conditions	35	38	42	48	54	62	67	77	86	98	109	kW
MIC - Maximum instantaneous current of the unit	155	180	219	271	277	330	338	379	394	481	503	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	108	124	149	181	187	221	229	255	270	323	345	A

Operating range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Water inlet temperature source side	IR, IW, IP, BR, BP	20 (5*)	50	10	25 (40*)	(°C)
Water outlet temperature plant side	IR, IW, IP	5	20	25	55	(°C)
Water outlet temperature plant side	BR, BP	-12	5	25	55	(°C)

* with condensation / evaporation control devices

CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :


- Adaptive function
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Condensation / evaporation control
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT


(reference drawing: unit with closing panel)

STANDARD UNIT

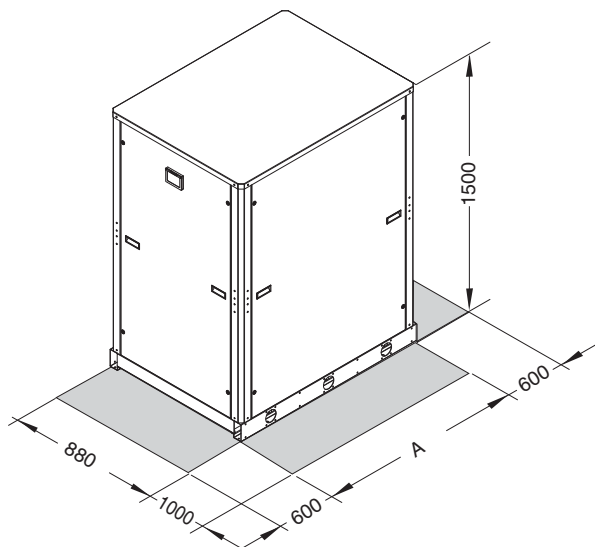

		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
STANDARD UNIT	A	880											mm
	Operating maximum weight	404	416	427	548	635	668	696	741	771	812	844	kg

STANDARD UNIT+ PUMPING MODULE MP

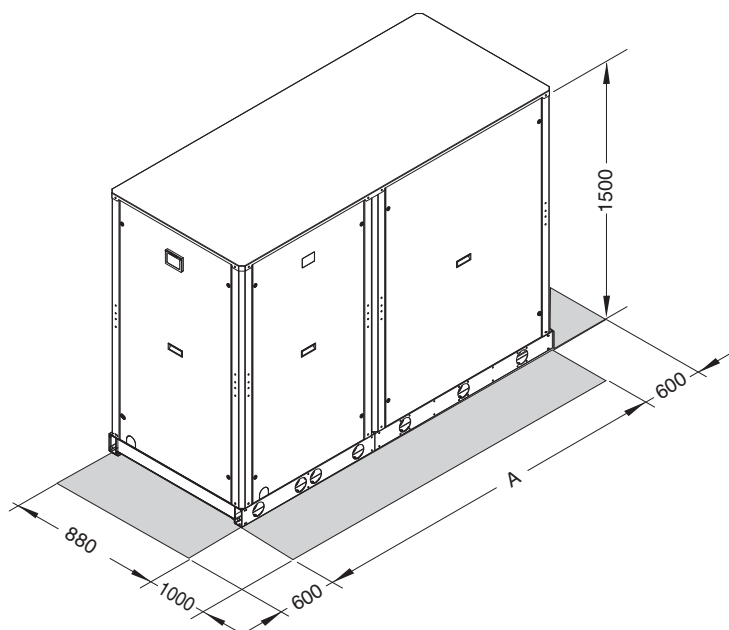

		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
STANDARD UNIT+ PUMPING MODULE MP	A (2+2 extra high head pumps)	2055											mm
	Operating maximum weight (2+2 extra high head pumps)	809	817	828	1059	1146	1225	1253	1321	1351	1415	1447	kg

> RVW

WATER-WATER CHILLERS FOR INDOOR INSTALLATION



Available range

Unit type

- IR Chiller
- IW Heat pump
(reversible on the water side)
- BR Chiller Brine
- BW Heat pump Brine
(reversible on the water side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Condenser Options

- T cooling tower water
- P well water
- S sea water

Unit description

This range of water-water chillers are designed to meet the climate control and air conditioning needs of large capacity systems in the industrial and commercial sectors. All the units are suitable for indoor installation and can be applied to fan coil plants and radiant floor plants.

Suitable for indoor installation, as standard the units are equipped with 1 or 2 TWIN-SCREW semihermetic compressors mounted on rubber vibration dampers able to modulate the capacity from minimum 25 (not for all configurations) to 100%, plant side exchanger shell and tube type complete with Victaulic water connections, fitted inside a shell of thermal insulation material to prevent condensation and heat exchange with the outside, optimised for R134a with high efficiency grooved tubes, protected by means of a water differential pressure switch, source side exchanger shell and tube type optimised for R134a with high efficiency grooved tubes complete with

Victaulic water connections, fitted inside a shell of thermal insulation material to prevent heat exchange (IW, BW only)

1 or 2 independent refrigerant circuits, complete with electronic expansion valve which optimises unit efficiency at full and partial loads and enables maximum seasonal efficiency, maximum and minimum pressure switch, PED safety valves, dehydrator filter, liquid/moisture indicator, compressor discharge and liquid shut-off valves, high and low pressure transducers, electrical panel with minimum protection IP54 containing the electrical equipment and all the components to control and command the unit complete with main supply breaker with door lock function, phase sequence control device, microprocessor controller with display (4 lines of 20 characters).

When developing the range special attention has been paid to the choice of heat exchangers in order to obtain high efficiencies at full loads and partial loads to maximise the seasonal efficiency rating (ESEER) and therefore reduce consumption and running costs

The units can be selected as Base setting up (AB) or as Low noise setting up (AS) that provides that compressor are positioned inside a soundproofed cabin, made with profiles and panels insulated with acoustic material.

The range is completed with numerous accessories and options.

The electronic controller can manage the various condensation control systems of the numerous applications required, enabling the control of 2-way or 3-way modulating valves or the control of pumps under INVERTER. The units can therefore be combined with liquid coolers (dry-coolers), cooling towers, geothermal boreholes or use for water cooling city or well water (condenser option P) or sea water (condenser option S). All the units are carefully built in compliance with the current regulations and individually tested. Installation therefore only requires the electrical and hydraulic connection.

Options

Compressor starting

- standard (contactors)
- soft starter

Compressors power factor correction

Electrical load protection

- standard (fuses)
- thermal magnetic circuit breakers

Evaporator flow switch (mounted)

Evaporator insulation higher thickness

Evaporator electrical heater for winter antifreeze

High and low pressure gauges

Compressor suction shut-off valve

Accessories

Rubber vibration dampers

External Water Storage Tank and Pumping

Module complete with insulated carbon steel tank, single or twin pump and all hydronic components.

Antifreeze electrical heaters for Storage tank

Remote controller

Serial Interface Modbus on RS 485

Programmer clock

Phase sequence and voltage controller

Water flow switch

NET NOMINAL performances - Standard plants - EUROVENT certified data

IR		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
W30W7	Cooling capacity	280	315	353	409	474	532	587	698	812	927	1056	1159	kW
	Power input	62,6	70,4	79,4	91,1	108	120	133	159	182	215	244	263	kW
	EER	4,47	4,48	4,45	4,49	4,40	4,42	4,41	4,38	4,45	4,30	4,33	4,41	W/W
	ESEER	4,83	4,77	4,78	4,83	4,84	4,79	4,84	4,82	4,90	4,83	4,86	4,87	W/W
	Water flow rate plant side	13,5	15,1	17,0	19,7	22,8	25,6	28,3	33,6	39,1	44,7	50,9	55,8	l/s
	Pressure drops plant side	46	37	46	44	55	43	54	52	45	57	59	45	kPa
	Water flow rate source side	16,3	18,3	20,6	23,8	27,6	31,1	34,3	40,8	47,3	54,2	61,8	67,7	l/s
	Pressure drops source side	29	25	26	28	38	27	25	26	28	38	27	25	kPa
IW		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
W30W7	Cooling capacity	280	315	353	409	474	532	587	698	812	927	1056	1159	kW
	Power input	62,6	70,4	79,4	91,1	108	120	133	159	182	215	244	263	kW
	EER	4,47	4,48	4,45	4,49	4,40	4,42	4,41	4,38	4,45	4,30	4,33	4,41	W/W
	ESEER	4,83	4,77	4,78	4,83	4,84	4,79	4,84	4,82	4,90	4,83	4,86	4,87	W/W
	Water flow rate plant side	13,5	15,1	17,0	19,7	22,8	25,6	28,3	33,6	39,1	44,7	50,9	55,8	l/s
	Pressure drops plant side	46	37	46	44	55	43	54	52	45	57	59	45	kPa
	Water flow rate source side	16,3	18,3	20,6	23,8	27,6	31,1	34,3	40,8	47,3	54,2	61,8	67,7	l/s
	Pressure drops source side	29	25	26	28	38	27	25	26	28	38	27	25	kPa
W10W45	Heating capacity	311	350	395	455	534	592	659	783	908	1055	1184	1304	kW
	Power input	72,8	82,7	93,4	104	128	139	155	186	213	256	279	311	kW
	COP	4,28	4,23	4,24	4,36	4,16	4,26	4,25	4,20	4,27	4,12	4,25	4,19	W/W
	Water flow rate plant side	14,8	16,7	18,8	21,7	25,4	28,2	31,4	37,3	43,2	50,2	56,4	62,1	l/s
	Pressure drops plant side	24	21	22	23	32	22	21	22	23	33	22	21	kPa
	Water flow rate source side	16,3	18,3	20,6	23,8	27,6	31,1	34,3	40,8	47,3	54,2	61,8	67,7	l/s
	Pressure drops source side	29	25	26	28	38	27	25	26	28	38	27	25	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

ESEER (European Seasonal Energy Efficiency Ratio)
 _____ = Unit in **A CLASS**.
W30W7 = source : water in 30°C out 35°C / plant : water in 12°C out 7°C
W10W45 = source : water in 10°C / plant : water in 40°C out 45°C

Acoustic performances

Base setting up (AB)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level ^(E)	97	97	97	98	98	98	98	99	100	100	100	100	dB(A)
Sound pressure level at 1 meter	79	79	79	80	80	80	80	80	81	81	81	81	dB(A)
Sound pressure level at 5 meters	70	70	70	72	72	72	71	72	73	73	73	73	dB(A)
Sound pressure level at 10 meters	65	65	65	67	67	67	66	67	68	68	68	68	dB(A)
Low noise setting up (AS)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level ^(E)	92	93	92	93	93	94	94	94	95	95	96	96	dB(A)
Sound pressure level at 1 meter	74	75	74	75	75	76	76	75	76	76	77	77	dB(A)
Sound pressure level at 5 meters	65	66	65	66	66	67	67	67	68	68	69	69	dB(A)
Sound pressure level at 10 meters	60	61	60	61	61	62	62	62	63	63	64	64	dB(A)

(E): EUROVENT certified data
 The acoustic performances are referred to units operating in cooling mode at nominal conditions W30/W7.
 Unit placed in free field on reflecting surface (directional factor equal to 2).
 The sound power level is measured according to ISO 9614 standard.
 The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

TECHNICAL DATA	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Power supply	400 - 3 - 50												V-ph-Hz
Compressor type	twin-screw												-
N° compressors / N° refrigerant circuits	1 / 1						2 / 2						n°
Part load	25 / 100% continuous						12.5 / 100% continuous						-
Plant side heat exchanger type / N°	shell and tube / 1						shell and tube / 2						-
Source side heat exchanger type / N°	shell and tube / 1						shell and tube / 2						-
IN/OUT Plant hydraulic fittings (victaulic)	DN125	DN125	DN125	DN150	DN150	DN150	DN200	DN150	DN200	DN200	DN200	DN200	-
IN/OUT Source hydraulic fittings (victaulic)	DN100	DN100	DN100	DN100	DN100	DN125	DN125	DN100	DN100	DN100	DN125	DN125	-

Electrical data

Standard unit	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
FLA - Full load current at maximum tolerated conditions	162	181	211	232	270	309	340	422	464	540	618	680	A
FLI - Full load power input at maximum tolerated conditions	99	110	129	144	169	190	209	257	287	339	380	418	kW
MIC - Maximum instantaneous current of the unit	520	612	665	436	465	586	650	876	668	735	895	990	A

Operative range

Temperature	Tipo Unità	Cooling		Heating		
		min	max	min	max	
Water inlet temperature source side	IR, IW, BR	20 (5*)	50	10	25 (40*)	(°C)
Water outlet temperature plant side	IR, IW	5	15	25	55	(°C)
Water outlet temperature plant side	BR	-8	5	25	55	(°C)
Water outlet temperature Desuperheater (VD)	IR, BR	35	50	-	-	(°C)
Water outlet temperature total Recovery (VR)	IR, BR	25	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Double Set Point
- Demand Limit
- Dinamic set point
- Integrative heating
- Condensation / evaporation control
- Remote stand by
- Remote cooling-heating



VD and VR versions

These units allow to recover the heating power through an additional heat exchanger.

DESUPERHEATERS VERSION VD

Allows the production of cold water as in the base version and, simultaneously, of hot water at temperatures from 35 to 50 °C. This is achieved by inserting, between the compressor and condenser, a heat exchanger water-gas cooler which allows for heat recovery from 15 to 20% of thermal power.

TOTAL RECOVERY VERSION VR

Allows the production of cold water and simultaneously of hot water at temperatures from 25 to 55 °C. This is achieved using a suitable heat exchanger that has a double water circuit: one for condensation and a second for heat recovery. The management to the two hydraulic circuits is in charge of the user.

Desupeheater Version (VD) - NET NOMINAL performances

IR	Base setting up (AB)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
W30W7 - W45	Cooling capacity	291	328	367	425	493	553	610	725	844	963	1097	1204	kW
	Total power input	61	69	77	89	105	118	130	156	178	210	238	257	kW
	EER	4,76	4,77	4,74	4,78	4,68	4,71	4,70	4,66	4,74	4,58	4,61	4,69	W/W
	HRE	5,65	5,67	5,63	5,68	5,56	5,60	5,59	5,55	5,64	5,45	5,49	5,59	W/W
	Water flow rate plant side	14,0	15,8	17,7	20,5	23,8	26,6	29,4	35,0	40,6	46,5	53,0	58,0	l/s
	Water pressure drop plant side	50	40	50	48	59	47	58	56	49	62	64	49	kPa
	Water flow rate source side	16,3	18,3	20,6	23,8	27,6	31,1	34,3	40,8	47,3	54,2	61,8	67,7	l/s
	Water pressure drop source side	29	25	26	28	38	27	25	26	28	38	27	25	kPa
	Heating recovery capacity	54,4	61,7	69,1	79,2	92,2	105	115	138	158	184	210	229	kW
	Water flow rate recovery	2,60	2,95	3,30	3,79	4,40	5,02	5,50	6,60	7,57	8,81	10,0	11,0	l/s
	Water pressure drop recovery	6	8	7	10	9	7	9	7	10	9	7	9	kPa

Total Recovery Version (VR) - NET NOMINAL performances

IR	Base setting up (AB)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
W30W7 - W45	Cooling capacity	250	281	317	364	426	475	527	625	724	833	943	1039	kW
	Total power input	72	82	92	104	126	138	155	186	210	251	278	308	kW
	EER	3,47	3,45	3,44	3,49	3,39	3,44	3,40	3,37	3,44	3,32	3,39	3,38	W/W
	HRE	7,90	7,86	7,83	7,93	7,74	7,83	7,74	7,68	7,84	7,58	7,73	7,71	W/W
	Water flow rate plant side	12,0	13,5	15,2	17,5	20,5	22,8	25,3	30,0	34,8	40,1	45,4	49,9	l/s
	Water pressure drop plant side	36	29	37	35	44	34	43	42	36	46	47	36	kPa
	Heating recovery capacity	318	359	404	464	546	607	674	801	925	1072	1208	1332	kW
	Water flow rate recovery	15,2	17,2	19,3	22,2	26,1	29,0	32,2	38,3	44,2	51,2	57,7	63,6	l/s
	Water pressure drop recovery	25	22	23	24	34	24	22	23	24	34	24	22	kPa


Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

W30W7 - W45 = source : water in 30°C d.b. out 35°C / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

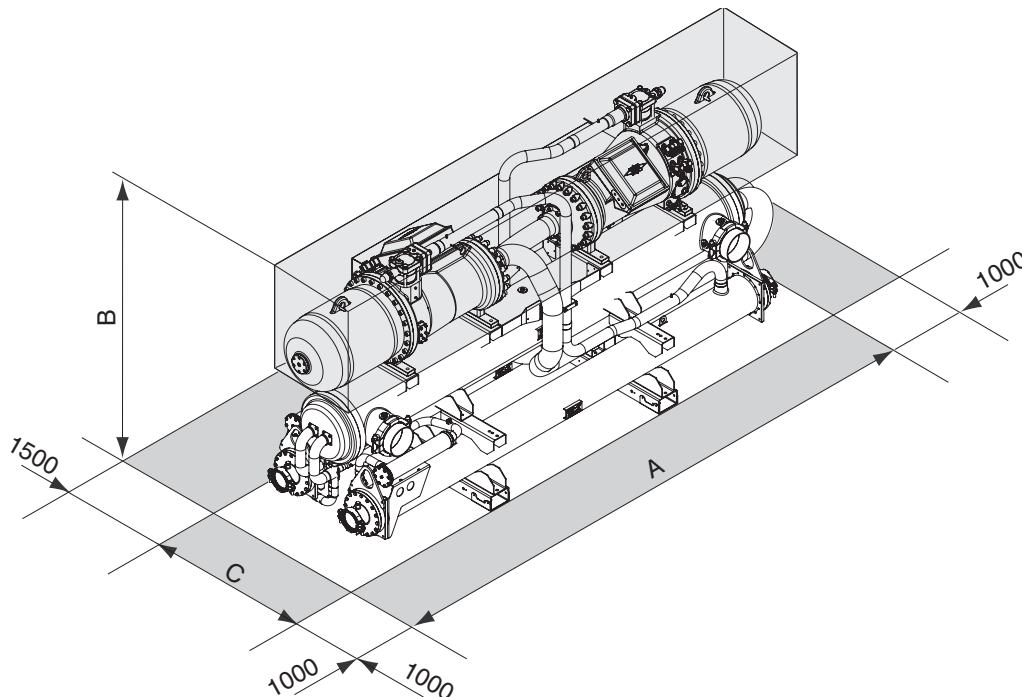

Modello	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
A	4084	4084	4084	4084	4084	4114	4114	4320	4463	4463	4463	4463	mm
B	1878	1878	1878	1904	1904	2002	2089	1932	1993	1993	2090	2090	mm
C	1043	1043	1043	1118	1118	1118	1118	1218	1218	1218	1256	1256	mm
Operating maximum weight	1929	1947	1984	2585	2618	2785	3134	3747	5042	5059	5512	5682	kg

> CXA

CONDENSING UNITS FOR OUTDOOR INSTALLATION

Available range

Unit type

- SR Condensing unit
 SP Reversible condensing unit
 (reversible on the refrigerant side)

Versions

- VB Base Version

Acoustic setting up

- AB Base setting up

NEW



Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

It is possible for example to connect direct expansion coils placed inside air handling units or remote plate heat exchangers placed inside technical rooms. In both cases the lack of outdoor hydraulic pipes eliminates the freezing problems and avoids brine solutions to be used.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with rotary or scroll compressor

(according to the model) mounted on damper supports, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins and shut off valves on the liquid line and on the gas line. The reversible units are moreover supplied with reverse cycle valve, thermostatic expansion valve (working in heating mode) and liquid receiver.

The circuit is protected by high and low pressure switches.

All the units are equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

All the units are supplied with an outdoor temperature sensor, already installed on the unit, in order to realize the climatic control.

All three-phase power supply units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Remote plate heat exchanger

Liquid line

TECHNICAL DATA	6.1	7.1	9.1	11.1	14.1	17.1	
Power supply	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50 400 - 3N - 50	230 - 1 - 50 400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	V-ph-Hz
Compressor type	rotativo	rotativo	scroll	scroll	scroll	scroll	-
N° compressors / N° refrigerant circuits	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1	n°
Source side heat exchanger type	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	-
Fans type	axial	axial	axial	axial	axial	axial	-
N° fans	1	1	1	1	1	1	n°
Liquid line connection	3/8"	3/8"	1/2"	1/2"	1/2"	1/2"	-
Gas line connection	5/8"	5/8"	7/8"	7/8"	7/8"	7/8"	-

OPERATING LIMITS	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	5	48	-15	42	°C
Evaporating temperature (dew point)	SR, SP	1	20	-	-	°C
Condensing temperature (dew point)	SP	-	-	35	60	°C

NOMINAL performances

SR	Base acoustic setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
A35E5	Cooling capacity	6,73	8,05	10,2	11,8	15,0	18,8	kW
	Power input	2,14	2,82	3,69	4,11	5,09	6,59	kW
	EER	3,15	2,85	2,76	2,86	2,95	2,85	-
SP	Base acoustic setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
A35E5	Cooling capacity	6,50	7,71	10,0	11,6	14,8	18,6	kW
	Power input	2,15	2,83	3,70	4,11	5,10	6,59	kW
	EER	3,03	2,72	2,70	2,81	2,90	2,82	-
A7C50	Heating capacity	6,68	7,81	9,89	10,9	14,6	17,8	kW
	Power input	2,32	2,82	3,78	4,19	5,07	6,58	kW
	COP	2,88	2,77	2,62	2,60	2,88	2,71	-
A7C45	Heating capacity	7,38	8,63	10,9	12,1	16,1	19,6	kW
	Power input	2,04	2,49	3,33	3,69	4,47	5,80	kW
	COP	3,62	3,47	3,27	3,28	3,60	3,38	-

The values are referred to units without options and accessories.

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C - subcooling 5°C

A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - superheating 5°C - subcooling 5°C

A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : temperatura di condensazione (dew point) 45°C - superheating 5°C - subcooling 5°C

Acoustic performances

Base acoustic setting up (AB)	6.1	7.1	9.1	11.1	14.1	17.1	
Sound power level	69	69	72	72	74	74	dB(A)
Sound pressure level at 1 metre	55	55	57	57	59	59	dB(A)
Sound pressure level at 5 metres	44	44	46	46	48	48	dB(A)
Sound pressure level at 10 metres	38	38	41	41	43	43	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 3744 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.


CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.

- compressor and pump or fan operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output

The main functions available are :

- water or air temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode (automatic set point adjustment according to outdoor air temperature)
- dynamic defrost cycle management according to outdoor air temperature
- alarm memory management and diagnostic
- fans management by means of continuous rotational speed control
- pump or fan management on the plant side
- integrative electrical heaters management in heating mode (2 step logic)

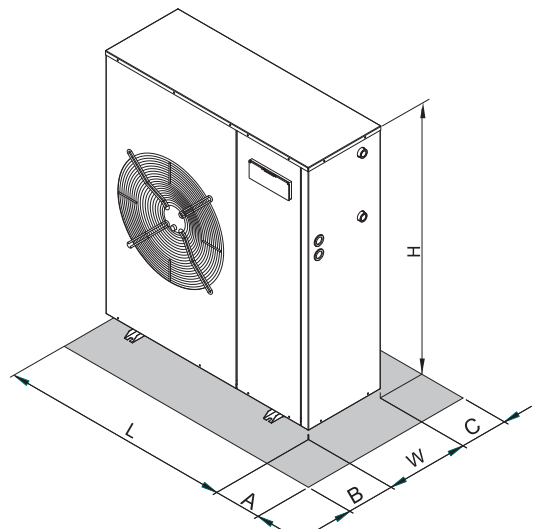

DIMENSIONS AND MINIMUM OPERATING AREA

	6.1	7.1	9.1	11.1	14.1	17.1	
L	994	994	994	994	994	994	mm
W	356	356	356	356	356	356	mm
H	903	903	1153	1153	1453	1453	mm
A	400	400	400	400	400	400	mm
B	600	600	600	600	600	600	mm
C	200	200	200	200	200	200	mm

> CMA² - CMA² HE

CONDENSING UNITS
FOR OUTDOOR INSTALLATION



FUNZIONE
ADAPTIVE



Available range

Unit type

- SR Condensing unit
- SP Reversible condensing unit (reversible on the refrigerant side)

Versions

- VB Base Version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

It is possible for example to connect direct expansion coils placed inside air handling units or remote plate heat exchangers placed inside technical rooms. In both cases the lack of outdoor hydraulic pipes eliminates the freezing problems and avoids brine solutions to be used.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is

equipped with scroll compressor mounted on damper supports, axial fans with safety protection grilles, finned coil made of copper pipes and aluminium louvered fins and shut off valves on the liquid line and on the gas line. The reversible units are moreover supplied with reverse cycle valve, thermostatic expansion valve (working in heating mode) and liquid receiver.

The circuit is protected by high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are supplied with an outdoor temperature sensor, already installed on the unit, in order to realize the climatic control.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Electrical loads protection

- fuses
- thermal magnetic circuit breakers

Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Remote plate heat exchanger

Liquid line

NET NOMINAL performances - CMA²

SR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,4	24,2	28,0	32,9	37,7	43,8	kW
	Power input	6,75	7,53	8,67	10,66	11,99	13,85	kW
	EER	3,17	3,21	3,23	3,08	3,14	3,17	W/W
SR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,5	23,2	26,9	31,6	36,2	42,1	kW
	Power input	7,26	8,14	9,34	11,45	12,97	14,92	kW
	EER	2,83	2,85	2,88	2,76	2,79	2,82	W/W
SP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,9	23,5	27,2	32,0	36,7	42,8	kW
	Power input	6,82	7,65	8,76	10,78	12,12	14,00	kW
	EER	3,06	3,07	3,11	2,97	3,02	3,06	W/W
A7C50	Heating capacity	20,0	22,5	26,1	30,9	35,5	40,1	kW
	Power input	6,87	7,71	8,95	11,07	12,42	13,97	kW
	COP	2,91	2,92	2,92	2,79	2,86	2,87	W/W
A7C45	Heating capacity	22,0	24,8	28,8	34,1	39,1	44,2	kW
	Power input	6,05	6,79	7,88	9,76	10,88	12,25	kW
	COP	3,64	3,66	3,66	3,50	3,60	3,61	W/W
SP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,0	22,6	26,2	30,7	35,2	41,0	kW
	Power input	7,32	8,23	9,41	11,54	13,09	15,05	kW
	EER	2,73	2,74	2,79	2,66	2,69	2,72	W/W
A7C50	Heating capacity	18,9	21,4	24,9	29,6	33,8	38,2	kW
	Power input	6,63	7,41	8,61	10,66	12,02	13,40	kW
	COP	2,85	2,89	2,89	2,77	2,81	2,85	W/W
A7C45	Heating capacity	20,9	23,6	27,5	32,6	37,3	42,2	kW
	Power input	5,84	6,52	7,59	9,39	10,58	11,88	kW
	COP	3,58	3,62	3,62	3,47	3,52	3,55	W/W

NET NOMINAL performances - CMA² HE

SR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	22,3	24,9	29,0	34,9	39,6	46,2	kW
	Power input	6,12	6,83	7,83	9,52	10,84	12,46	kW
	EER	3,63	3,65	3,70	3,66	3,65	3,71	W/W
SR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,4	23,9	27,9	33,6	38,1	44,6	kW
	Power input	6,62	7,38	8,47	10,29	11,61	13,21	kW
	EER	3,24	3,23	3,29	3,26	3,29	3,38	W/W
SP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,8	23,8	27,8	33,6	39	44,1	kW
	Power input	6,07	7,03	8,16	10,1	11,7	13,2	kW
	EER	3,60	3,39	3,4	3,34	3,33	3,33	W/W
A7C50	Heating capacity	20,5	23,2	27,0	31,8	36,5	42,4	kW
	Power input	6,46	7,13	8,21	10,01	11,40	12,91	kW
	COP	3,18	3,26	3,29	3,17	3,20	3,29	W/W
A7C45	Heating capacity	22,7	25,6	29,8	35,1	40,2	46,8	kW
	Power input	5,69	6,28	7,23	8,78	10,04	11,44	kW
	COP	3,98	4,08	4,12	3,99	4,01	4,09	W/W
SP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,9	23,8	27,8	33,6	39	44,1	kW
	Power input	6,55	7,03	8,16	10,1	11,7	13,2	kW
	EER	3,20	3,39	3,4	3,34	3,33	3,33	W/W
A7C50	Heating capacity	19,5	22,1	25,9	30,4	34,6	40,4	kW
	Power input	6,24	6,91	7,95	9,64	10,98	12,51	kW
	COP	3,12	3,19	3,25	3,15	3,16	3,23	W/W
A7C45	Heating capacity	21,5	24,3	28,5	33,6	38,3	44,6	kW
	Power input	5,50	6,09	7,00	8,50	9,71	11,03	kW
	COP	3,91	3,99	4,08	3,96	3,95	4,05	W/W

The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C

A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C

A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level	77	77	78	81	82	82	dB(A)
Sound pressure level at 1 meter	61	62	62	65	66	66	dB(A)
Sound pressure level at 5 meters	51	51	52	55	55	56	dB(A)
Sound pressure level at 10 meters	46	46	47	50	50	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	59	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	48	48	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Source side heat exchanger type	finned coil						-
Fans type	axial						-
N° fans	1						n°
Tank volume	5/8"						-
Hydraulic fittings	1" 1/8						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	18,8	20,8	22,9	25,9	29,9	34,0	A
FLI - Full load power input at maximum tolerated conditions	10,8	12,1	13,4	15,8	18,4	21,0	kW
MIC - Maximum instantaneous current of the unit	98	114	121	129	144	178	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	55	64	68	73	82	102	A

Operating range

Temperature	Unit type	Cooling		Heating		°C
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10*	48 (STD) 50 (HE)	-15	42	°C
Evaporating temperature (dew point)	SR, SP	0	15	-	-	°C
Condensing temperature (dew point)	SP	-	-	30	60	°C

* with fans modulating control option (condensation / evaporation control)

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water or air temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode (automatic set point adjustment according to outdoor air temperature)
- dynamic defrost cycle management according to outdoor air temperature
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump or fan management on the plant side
- integrative electrical heaters management in heating mode (2 step logic)
- compressor and pump or fan operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

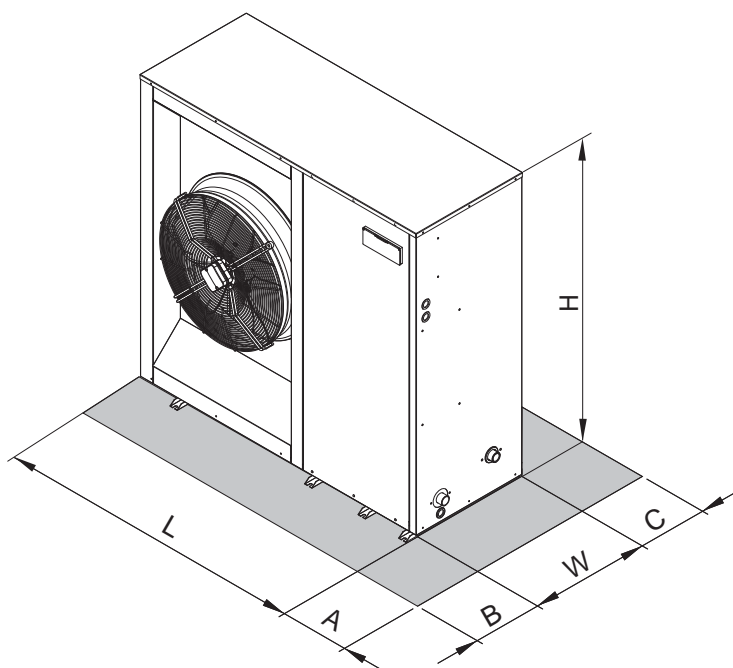

	19.1	22.1	26.1	30.1	35.1	40.1	
L	1494	1494	1494	1704	1704	1704	mm
W	576	576	576	576	576	576	mm
H	1453	1453	1453	1453	1453	1453	mm
A	400	400	400	400	400	400	mm
B	600	600	600	600	600	600	mm
C	200	200	200	200	200	200	mm
CMA unit - maximum weight operation	221	224	239	257	277	279	kg
CMA HE unit - maximum weight operation	236	239	259	279	302	304	kg

> CMP² - CMP² HE

CONDENSING UNITS
FOR INDOOR INSTALLATION



Available range

Unit type

- SR Condensing unit
- SP Reversible condensing unit (reversible on the refrigerant side)

Versions

- VB Base Version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of small and medium size.

All the units are suitable for indoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

It is possible for example to connect direct expansion coils placed inside air handling units or remote plate heat exchangers placed inside technical rooms. In both cases the lack of outdoor hydraulic pipes eliminates the freezing problems and avoids brine solutions to be used.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is

equipped with scroll compressor mounted on damper supports, centrifugal fans (plug fan), finned coil made of copper pipes and aluminium louvered fins and shut off valves on the liquid line and on the gas line. The reversible units are moreover supplied with reverse cycle valve, thermostatic expansion valve (working in heating mode) and liquid receiver.

The circuit is protected by high and low pressure switches.

All the units are equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors.

All the units are supplied with an outdoor temperature sensor, already installed on the unit, in order to realize the climatic control.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Electrical loads protection

- fuses
 - thermal magnetic circuit breakers
- Compressor power factor correction

Accessories

Rubber vibration dampers

Coil protection grille

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Remote plate heat exchanger

Liquid line

NET NOMINAL performances - CMP²

SR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,4	24,2	28,0	32,9	37,7	43,8	kW
	Power input	6,75	7,53	8,67	10,66	11,99	13,85	kW
	EER	3,17	3,21	3,23	3,08	3,14	3,17	W/W
SR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,5	23,2	26,9	31,6	36,2	42,1	kW
	Power input	7,26	8,14	9,34	11,45	12,97	14,92	kW
	EER	2,83	2,85	2,88	2,76	2,79	2,82	W/W
SP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,9	23,5	27,2	32,0	36,7	42,8	kW
	Power input	6,82	7,65	8,76	10,78	12,12	14,00	kW
	EER	3,06	3,07	3,11	2,97	3,02	3,06	W/W
A7C50	Heating capacity	20,0	22,5	26,1	30,9	35,5	40,1	kW
	Power input	6,87	7,71	8,95	11,07	12,42	13,97	kW
	COP	2,91	2,92	2,92	2,79	2,86	2,87	W/W
A7C45	Heating capacity	22,0	24,8	28,8	34,1	39,1	44,2	kW
	Power input	6,05	6,79	7,88	9,76	10,88	12,25	kW
	COP	3,64	3,66	3,66	3,50	3,60	3,61	W/W
SP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,0	22,6	26,2	30,7	35,2	41,0	kW
	Power input	7,32	8,23	9,41	11,54	13,09	15,05	kW
	EER	2,73	2,74	2,79	2,66	2,69	2,72	W/W
A7C50	Heating capacity	18,9	21,4	24,9	29,6	33,8	38,2	kW
	Power input	6,63	7,41	8,61	10,66	12,02	13,40	kW
	COP	2,85	2,89	2,89	2,77	2,81	2,85	W/W
A7C45	Heating capacity	20,9	23,6	27,5	32,6	37,3	42,2	kW
	Power input	5,84	6,52	7,59	9,39	10,58	11,88	kW
	COP	3,58	3,62	3,62	3,47	3,52	3,55	W/W

NET NOMINAL performances - CMP² HE

SR	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	22,3	24,9	29,0	34,9	39,6	46,2	kW
	Power input	6,12	6,83	7,83	9,52	10,84	12,46	kW
	EER	3,63	3,65	3,70	3,66	3,65	3,71	W/W
SR	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,4	23,9	27,9	33,6	38,1	44,6	kW
	Power input	6,62	7,38	8,47	10,29	11,61	13,21	kW
	EER	3,24	3,23	3,29	3,26	3,29	3,38	W/W
SP	Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	21,8	23,8	27,8	33,6	39	44,1	kW
	Power input	6,07	7,03	8,16	10,1	11,7	13,2	kW
	EER	3,60	3,39	3,4	3,34	3,33	3,33	W/W
A7C50	Heating capacity	20,5	23,2	27,0	31,8	36,5	42,4	kW
	Power input	6,46	7,13	8,21	10,01	11,40	12,91	kW
	COP	3,18	3,26	3,29	3,17	3,20	3,29	W/W
A7C45	Heating capacity	22,7	25,6	29,8	35,1	40,2	46,8	kW
	Power input	5,69	6,28	7,23	8,78	10,04	11,44	kW
	COP	3,98	4,08	4,12	3,99	4,01	4,09	W/W
SP	Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
A35E5	Cooling capacity	20,9	23,8	27,8	33,6	39	44,1	kW
	Power input	6,55	7,03	8,16	10,1	11,7	13,2	kW
	EER	3,20	3,39	3,4	3,34	3,33	3,33	W/W
A7C50	Heating capacity	19,5	22,1	25,9	30,4	34,6	40,4	kW
	Power input	6,24	6,91	7,95	9,64	10,98	12,51	kW
	COP	3,12	3,19	3,25	3,15	3,16	3,23	W/W
A7C45	Heating capacity	21,5	24,3	28,5	33,6	38,3	44,6	kW
	Power input	5,50	6,09	7,00	8,50	9,71	11,03	kW
	COP	3,91	3,99	4,08	3,96	3,95	4,05	W/W

The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C

A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C

A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level	76	76	77	80	81	81	dB(A)
Sound pressure level at 1 meter	60	60	61	64	65	65	dB(A)
Sound pressure level at 5 meters	50	50	51	54	55	55	dB(A)
Sound pressure level at 10 meters	45	45	46	49	49	50	dB(A)
Low noise setting up (AS)	19.1	22.1	26.1	30.1	35.1	40.1	
Sound power level	74	74	75	78	79	79	dB(A)
Sound pressure level at 1 meter	58	58	59	62	63	63	dB(A)
Sound pressure level at 5 meters	48	48	49	52	53	53	dB(A)
Sound pressure level at 10 meters	43	43	44	47	47	48	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	19.1	22.1	26.1	30.1	35.1	40.1	
Power supply	400 - 3N - 50						V-ph-Hz
Compressor type	scroll						-
N° compressors / N° refrigerant circuits	1 / 1						n°
Source side heat exchanger type	finned coil						-
Fans type	centrifugal (plug fan)						-
N° fans	1						n°
Tank volume	5/8"						-
Hydraulic fittings	1" 1/8						-

Electrical data

Standard unit	19.1	22.1	26.1	30.1	35.1	40.1	
FLA - Full load current at maximum tolerated conditions	28,9	30,9	33,0	28,0	32,0	36,1	A
FLI - Full load power input at maximum tolerated conditions	13,0	14,3	15,6	16,8	19,4	22,0	kW
MIC - Maximum instantaneous current of the unit	108	124	131	131	146	180	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	65	74	78	75	84	104	A

Operating range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10	48 (STD) 50 (HE)	-15	42	°C
Evaporating temperature (dew point)	SR, SP	0	15	-	-	°C
Condensing temperature (dew point)	SP	-	-	30	60	°C

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a wiring board, all the electrical loads and the control devices are connected. The user interface is realized by a display and four buttons that allow to view and, if necessary, modify all the operating parameters of the unit. It's available, as an accessory, a remote control that reports all the functionalities of the user interface placed on the unit.


The main functions available are :

- water or air temperature management (through set point adjustment)
- adaptive function
- climatic control in heating and in cooling mode (automatic set point adjustment according to outdoor air temperature)
- dynamic defrost cycle management according to outdoor air temperature
- alarm memory management and diagnostic

- fans management by means of continuous rotational speed control
- pump or fan management on the plant side
- integrative electrical heaters management in heating mode (2 step logic)
- compressor and pump or fan operating hours recording
- serial communication through Modbus protocol
- remote stand by
- remote cooling-heating
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

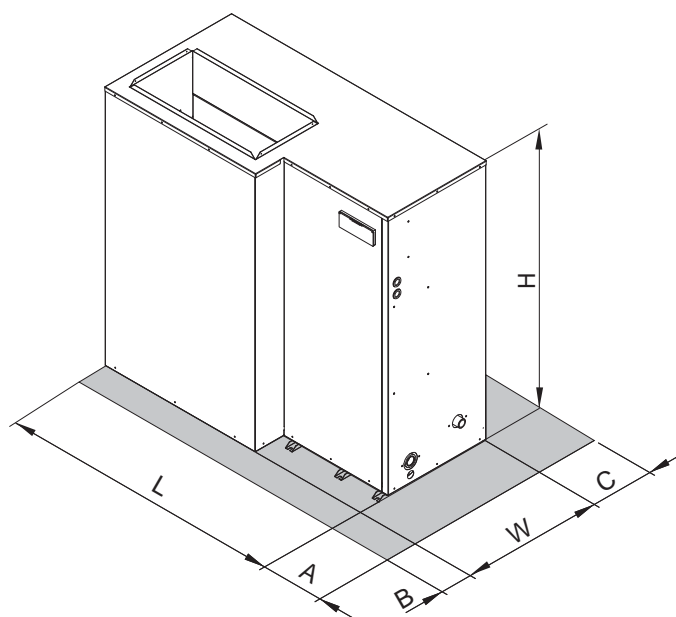

	19.1	22.1	26.1	30.1	35.1	40.1	
L	1494	1494	1494	1704	1704	1704	mm
W	744	744	744	744	744	744	mm
H	1453	1453	1453	1453	1453	1453	mm
A	400	400	400	400	400	400	mm
B	450	450	450	450	450	450	mm
C	200	200	200	200	200	200	mm
CMP unit - maximum weight operation	256	259	274	278	298	300	kg
CMP HE unit - maximum weight operation	271	274	294	303	323	325	kg

> CGA

CONDENSING UNITS FOR OUTDOOR INSTALLATION



ADAPTIVE
FUNCTION



Available range

Unit type

- SR Condensing unit
- SP Heat pump condensing unit (reversible on the refrigerant side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up
- AX eXtra low noise setting up

Source temperature level

- M Medium temperature level
- A High temperature level

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, thermostatic expansion valve (only for SP), reverse cycle valve, axial fans with safety protec-

tion grilles, finned coil made of copper pipes and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for SP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Remote plate heat exchanger

Liquid line

NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216	kW
	Power input	15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6	kW
	EER	3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06	W/W
SR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,4	56,1	61,3	72,0	82,4	95,3	106	118	132	150	165	189	210	kW
	Power input	16,1	19,2	21,3	24,6	28,8	33,4	36,9	41,0	46,3	52,8	58,6	66,2	73,4	kW
	EER	2,94	2,92	2,88	2,93	2,86	2,85	2,87	2,88	2,85	2,84	2,82	2,85	2,86	W/W
SR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	46,3	54,8	59,9	70,4	80,5	93,1	104	114	129	146	162	184	204	kW
	Power input	16,2	19,6	21,9	25,1	29,6	32,5	38,0	42,2	47,7	53,8	59,8	68,1	75,5	kW
	EER	2,86	2,80	2,74	2,80	2,72	2,86	2,74	2,70	2,70	2,71	2,71	2,70	2,70	W/W
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214	kW
	Power input	15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3	kW
	EER	3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04	W/W
A7C50	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW
	Power input	15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8	kW
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	W/W
A7C45	Heating capacity	49,4	58,4	63,9	75,0	85,9	99,3	111	122	137	156	173	196	218	kW
	Power input	14,6	17,6	19,3	22,6	25,6	31,0	33,3	38,1	41,6	48,1	52,7	60,4	66,4	kW
	COP	3,39	3,31	3,31	3,33	3,35	3,20	3,33	3,21	3,30	3,24	3,27	3,25	3,28	W/W
SP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	45,4	54,9	59,6	69,7	76,8	92,4	103	114	126	143	160	185	205	kW
	Power input	15,9	19,8	21,6	25,2	28,3	33,8	37,4	41,6	46,6	52,7	59,0	66,4	74,5	kW
	EER	2,86	2,77	2,76	2,77	2,71	2,73	2,75	2,74	2,70	2,71	2,71	2,79	2,75	W/W
A7C50	Heating capacity	46,6	56,0	61,1	71,9	80,2	96,2	106	121	132	149	167	190	209	kW
	Power input	14,6	17,7	19,4	22,6	25,7	31,1	33,4	38,2	41,7	48,2	52,9	60,5	66,7	kW
	COP	3,19	3,16	3,15	3,18	3,12	3,09	3,17	3,17	3,17	3,09	3,16	3,14	3,13	W/W
A7C45	Heating capacity	47,9	56,7	61,9	72,7	83,2	96,3	107	119	133	152	167	191	212	kW
	Power input	13,9	16,9	18,5	21,5	24,5	29,6	31,8	36,4	39,7	45,9	50,4	57,6	63,5	kW
	COP	3,44	3,36	3,35	3,38	3,40	3,25	3,37	3,28	3,36	3,30	3,31	3,31	3,34	W/W
SP	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	44,5	53,7	58,4	68,3	75,3	90,5	101	111	124	140	157	180	201	kW
	Power input	17,0	20,9	22,8	26,6	29,9	35,7	39,5	44,0	49,2	55,6	62,3	70,3	78,7	kW
	EER	2,62	2,57	2,56	2,57	2,52	2,54	2,56	2,52	2,52	2,52	2,52	2,56	2,55	W/W
A7C50	Heating capacity	44,9	54,0	58,9	69,4	77,4	92,8	103	117	127	144	161	183	201	kW
	Power input	13,9	16,8	18,5	21,6	24,5	29,7	31,9	36,4	39,8	46,0	50,4	57,7	63,5	kW
	COP	3,23	3,21	3,18	3,21	3,16	3,12	3,23	3,21	3,19	3,13	3,19	3,17	3,17	W/W
A7C45	Heating capacity	46,8	55,3	60,5	71,1	81,3	94,0	105	115	130	147	164	186	206	kW
	Power input	13,2	16,0	17,6	20,6	23,3	28,3	30,4	34,7	37,9	43,8	48,0	54,9	60,5	kW
	COP	3,53	3,46	3,44	3,46	3,49	3,33	3,46	3,32	3,44	3,37	3,41	3,38	3,41	W/W

The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C
A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C
A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	82	82	83	84	84	85	85	85	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	66	67	67	67	68	69	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	57	58	58	58	59	60	60	61	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	79	79	80	81	81	82	82	82	83	84	84	85	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	63	64	64	64	65	66	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	54	55	55	55	56	57	57	58	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	49	50	50	50	51	52	52	53	53	dB(A)
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	77	77	78	79	79	80	80	80	81	82	82	83	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	61	62	62	62	63	64	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	47	48	48	48	49	50	50	51	51	dB(A)

The values are referred to units without options and accessories.

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2		
Power supply	400 - 3+N - 50					400 - 3 - 50								V-ph-Hz	
Compressor type														scroll	-
N° compressors / N° refrigerant circuits														2 / 1	n°
Source side heat exchanger type														finned coil	-
Fans type														axial	-
N° fans	2			3			2		3		4			n°	
Liquid line connection	7/8"						1 1/8"			1 3/8"				-	
Gas line connection	1 5/8"						2 1/8"							-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	170	A
FLI - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	103	kW
MIC - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	391	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	272	A

Operative range

Temperature	Unit type	Cooling		Heating		°C
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10*	45	-7	40*	°C
Evaporating temperature (dew point)	SR, SP	1	15	-	-	°C
Condensing temperature (dew point)	SP	-	-	30	60	°C
Water outlet temperature (VD)	SR, SP	30	70	30	70	(°C)

* with fans modulating control option (condensation / evaporation control)

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat. **The Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	15,1	17,9	19,8	23,0	26,8	31,1	34,4	38,2	43,1	49,3	54,7	61,8	68,4	kW
	EER	3,37	3,36	3,32	3,36	3,30	3,28	3,34	3,30	3,29	3,27	3,24	3,27	3,29	W/W
	Heating recovery capacity	14,8	17,4	19,1	22,4	25,6	29,6	33,2	36,5	41,0	46,6	51,5	58,6	65,1	kW
	Water flow rate recovery	0,70	0,83	0,91	1,07	1,22	1,42	1,59	1,74	1,96	2,23	2,46	2,80	3,11	l/s
	Water pressure drop recovery	7	11	13	17	22	18	22	12	16	20	24	20	24	kPa
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	49,2	59,4	64,6	75,5	83,2	100	111	124	137	155	173	200	222	kW
	Total power input	14,9	18,1	19,8	23,1	25,9	30,9	34,2	38,1	42,6	48,2	54,0	60,8	68,1	kW
	EER	3,30	3,28	3,26	3,27	3,21	3,24	3,25	3,25	3,22	3,22	3,20	3,29	3,26	W/W
	Heating recovery capacity	14,3	17,2	18,7	21,9	24,1	29,1	32,2	35,8	39,7	45,0	50,2	58,0	64,5	kW
	Water flow rate recovery	0,68	0,82	0,89	1,05	1,15	1,39	1,54	1,71	1,90	2,15	2,40	2,77	3,08	l/s
	Water pressure drop recovery	7	11	12	17	20	17	20	12	15	19	23	20	23	kPa

Total Recovery Version (VR) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	14,9	17,7	19,6	22,7	26,5	30,8	34,1	37,8	42,7	48,8	54,1	61,2	67,7	kW
	EER	3,42	3,40	3,36	3,41	3,34	3,31	3,37	3,33	3,33	3,30	3,27	3,30	3,32	W/W
	Heating recovery capacity	65,0	76,9	84,5	98,9	114	131	147	162	182	207	229	260	289	kW
	Water flow rate recovery	3,11	3,67	4,04	4,73	5,43	6,28	7,02	7,73	8,70	9,89	10,9	12,4	13,8	l/s
	Water pressure drop recovery	41	57	48	53	59	58	62	56	61	61	62	65	65	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

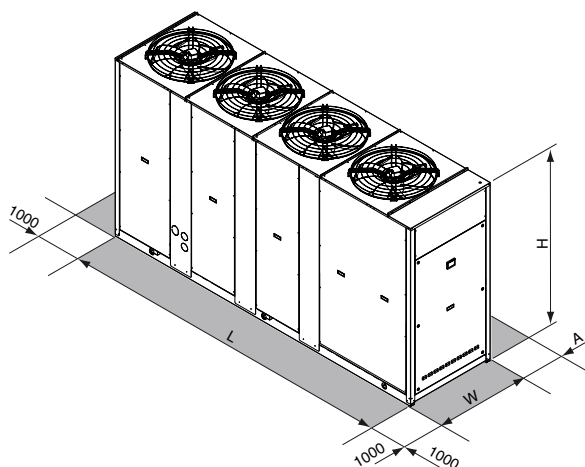

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322		4080		mm
W			954				1104			1104		1104		mm
H			1930				1793			2193		2193		mm
A				1600							2000			mm
Operating maximum weight	635	639	639	680	705	953	1034	1065	1181	1240	1292	1435	1481	kg

> CGA HE

CONDENSING UNITS FOR OUTDOOR INSTALLATION



Available range

Unit type

- SR Condensing unit
- SP Heat pump condensing unit
(reversible on the refrigerant side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up
- AX eXtra low noise setting up

Source temperature level

- M Medium temperature level
- A High temperature level

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, thermostatic expansion valve (only for SP), reverse cycle valve, axial fans with safety protec-

tion grilles, finned coil made of copper pipes and aluminium louvered fins with sub-cooling section. The circuit is protected by a safety gas valve, high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for SP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Remote plate heat exchanger

Liquid line

NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	51,2	60,7	68,5	76,7	90,5	103,0	116	131	145	166	188	214	kW
	Power input	14,8	17,0	19,7	21,8	27,0	30,9	34,3	38,3	42,3	49,5	54,8	63,9	kW
	EER	3,46	3,57	3,48	3,52	3,35	3,33	3,38	3,42	3,43	3,35	3,43	3,35	W/W
SR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	48,8	57,9	65,2	73,1	86,3	98,2	110	124	138	159	179	204	kW
	Power input	15,4	17,7	20,5	22,7	27,5	31,8	35,4	39,6	43,9	51,0	56,8	65,7	kW
	EER	3,17	3,27	3,18	3,22	3,14	3,09	3,11	3,13	3,14	3,12	3,15	3,11	W/W
SR	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	48,0	56,8	64,2	71,8	84,8	96,6	108	122	136	156	176	200	kW
	Power input	15,6	18,0	20,7	23,0	27,8	32,2	35,8	40,2	44,7	51,5	57,4	66,4	kW
	EER	3,08	3,16	3,10	3,12	3,05	3,00	3,02	3,03	3,04	3,03	3,07	3,01	W/W
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	49,1	58,2	65,9	73,7	88,2	100,2	112	125	139	160	180	207	kW
	Power input	14,5	16,9	19,3	21,5	26,5	30,0	33,6	37,5	41,4	48,1	53,8	62,2	kW
	EER	3,39	3,44	3,41	3,43	3,33	3,34	3,33	3,33	3,36	3,33	3,35	3,33	W/W
A7C50	Heating capacity	49,2	58,0	65,6	73,6	87,9	99,8	112	125	140	160	180	206	kW
	Power input	15,3	17,8	20,4	22,9	27,4	31,0	34,8	39,0	43,5	50,0	55,9	64,2	kW
	COP	3,22	3,26	3,22	3,21	3,21	3,22	3,22	3,21	3,22	3,20	3,22	3,21	W/W
A7C45	Heating capacity	51,7	61,3	69,2	77,5	91,4	104,0	117	132	146	168	190	216	kW
	Power input	14,6	16,9	19,4	21,8	26,1	29,5	33,1	37,1	41,4	47,6	53,2	61,1	kW
	COP	3,55	3,62	3,56	3,55	3,50	3,53	3,54	3,56	3,54	3,52	3,57	3,54	W/W
SP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	46,8	55,4	62,7	70,2	84,0	95,5	107	119	133	152	172	198	kW
	Power input	15,1	17,6	20,0	22,4	27,0	30,8	34,6	38,8	43,0	49,5	55,7	63,9	kW
	EER	3,10	3,15	3,14	3,13	3,11	3,10	3,09	3,07	3,09	3,07	3,09	3,10	W/W
A7C50	Heating capacity	47,9	56,5	63,9	71,7	85,6	97,2	109	122	136	156	175	201	kW
	Power input	14,7	17,2	19,7	22,2	26,0	29,6	33,4	37,5	42,0	47,9	53,7	61,4	kW
	COP	3,26	3,28	3,24	3,23	3,29	3,28	3,26	3,25	3,24	3,26	3,26	3,27	W/W
A7C45	Heating capacity	49,3	58,5	65,9	73,8	87,2	99,2	111	125	139	161	181	206	kW
	Power input	14,0	16,4	18,8	21,1	24,8	28,2	31,8	35,7	40,0	45,6	51,1	58,5	kW
	COP	3,52	3,57	3,51	3,49	3,52	3,52	3,49	3,51	3,49	3,52	3,54	3,52	W/W
SP	eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5	Cooling capacity	46,0	54,5	61,7	69,0	82,6	93,9	105	118	131	150	168	194	kW
	Power input	15,3	17,9	20,3	22,7	27,3	31,2	35,1	39,4	43,7	50,0	56,3	64,6	kW
	EER	3,01	3,04	3,04	3,04	3,03	3,01	2,99	2,99	3,00	3,00	2,98	3,00	W/W
A7C50	Heating capacity	47,4	55,8	63,1	70,8	84,6	96,0	108	120	135	154	173	198	kW
	Power input	14,5	16,9	19,3	21,7	25,5	29,0	32,7	36,8	41,2	46,8	52,6	60,1	kW
	COP	3,27	3,30	3,27	3,26	3,32	3,31	3,30	3,26	3,28	3,29	3,29	3,29	W/W
A7C45	Heating capacity	48,5	57,4	64,8	72,5	85,6	97,6	109	123	137	158	178	202	kW
	Power input	13,8	16,1	18,4	20,7	24,3	27,6	31,1	35,0	39,2	44,6	50,1	57,2	kW
	COP	3,51	3,57	3,53	3,51	3,53	3,53	3,50	3,52	3,50	3,54	3,55	3,53	W/W

The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C

A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C

A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level	82	82	83	84	85	85	85	85	86	87	87	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	67	67	67	67	68	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	58	58	58	58	59	60	60	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	53	53	53	53	54	55	55	56	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level	79	79	80	81	82	82	82	82	83	84	84	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	64	64	64	64	65	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	55	55	55	55	56	57	57	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	50	50	50	50	51	52	52	53	dB(A)
eXtra low noise setting up (AX)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Sound power level	77	77	78	79	80	80	80	80	81	82	82	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	62	62	62	62	63	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	53	53	53	53	54	55	55	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	48	48	48	48	49	50	50	51	dB(A)

The values are referred to units without options and accessories.

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
Power supply	400 - 3+N - 50				400 - 3 - 50								V-ph-Hz
Compressor type	scroll												-
N° compressors / N° refrigerant circuits	2 / 1												n°
Source side heat exchanger type	finned coil												-
Fans type	axial												-
N° fans	2	3		2				3		4			n°
Liquid line connection	7/8"				1 1/8"				1 3/8"				-
Gas line connection	1 5/8"				2 1/8"								-

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
FLA - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	A
FLI - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	kW
MIC - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10*	45	-7	40*	°C
Evaporating temperature (dew point)	SR, SP	1	15	-	-	°C
Condensing temperature (dew point)	SP	-	-	30	60	°C
Water outlet temperature (VD)	SR, SP	30	70	30	70	(°C)

* with fans modulating control option (condensation / evaporation control)

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat. **The Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desuperheater Version (VD) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5 - W45	Cooling capacity	53,2	63,1	71,2	79,7	94,1	107	120	136	151	173	195	222	kW
	Total power input	14,4	16,5	19,1	21,1	26,2	30,0	33,2	37,2	41,1	48,0	53,2	62,0	kW
	EER	3,69	3,82	3,73	3,78	3,59	3,57	3,61	3,66	3,67	3,60	3,67	3,58	W/W
	Heating recovery capacity	15,4	18,3	20,7	23,1	27,3	31,1	34,9	39,4	43,6	50,2	56,7	64,5	kW
	Water flow rate recovery	0,74	0,87	0,99	1,10	1,30	1,48	1,67	1,88	2,09	2,40	2,71	3,08	l/s
	Water pressure drop recovery	8	12	15	18	25	20	24	14	18	24	29	24	kPa
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5 - W45	Cooling capacity	51,1	60,5	68,5	76,6	91,8	104	117	130	145	166	188	216	kW
	Total power input	14,1	16,4	18,7	20,8	25,7	29,1	32,6	36,4	40,2	46,6	52,2	60,3	kW
	EER	3,62	3,69	3,66	3,68	3,57	3,57	3,59	3,57	3,61	3,56	3,60	3,58	W/W
	Heating recovery capacity	14,8	17,6	19,9	22,2	26,6	30,2	33,9	37,8	42,0	48,2	54,4	62,5	kW
	Water flow rate recovery	0,71	0,84	0,95	1,06	1,27	1,44	1,62	1,81	2,01	2,30	2,60	2,99	l/s
	Water pressure drop recovery	7	11	14	17	24	19	22	13	17	22	27	23	kPa

Total Recovery Version (VR) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
A35E5 - W45	Cooling capacity	53,2	63,1	71,2	79,7	94,1	107	120	136	151	173	195	222	kW
	Total power input	14,2	16,4	18,9	20,9	25,9	29,7	32,9	36,8	40,6	47,5	52,6	61,4	kW
	EER	3,75	3,85	3,77	3,81	3,63	3,60	3,65	3,70	3,72	3,64	3,71	3,62	W/W
	Heating recovery capacity	66,8	78,7	89,1	99,6	119	135	151	171	189	218	245	281	kW
	Water flow rate recovery	3,19	3,76	4,26	4,76	5,68	6,47	7,23	8,16	9,03	10,42	11,7	13,4	l/s
	Water pressure drop recovery	43	60	54	53	64	61	65	63	66	67	71	76	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

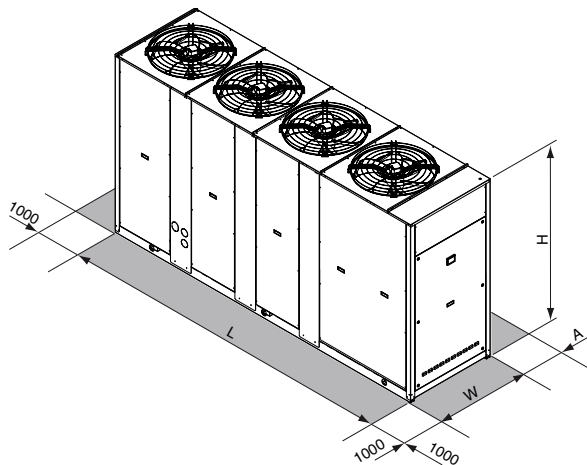

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	
L		2480				3322			3322		4080		mm
W		954				1104			1104		1104		mm
H		1930				1793			2193		2193		mm
A		1600							2000				mm
Operating maximum weight	635	639	639	680	705	953	1034	1065	1181	1240	1292	1435	kg



Available range

Unit type

- SR Condensing unit
- SP Heat pump condensing unit (reversible on the refrigerant side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Source temperature level

- M Medium temperature level
- A High temperature level

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on

damper supports, thermostatic expansion valve (only for SP), reverse cycle valve, double inlet centrifugal fans with forward curved blades, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control INVERTER (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

(standard for SP)

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for SP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Remote plate heat exchanger

Liquid line

NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216	kW
	Power input	15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6	kW
	EER	3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06	W/W
SR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216	kW
	Power input	15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6	kW
	EER	3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06	W/W
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214	kW
	Power input	15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3	kW
	EER	3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04	W/W
A7C50	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW
	Power input	15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8	kW
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	W/W
A7C45	Heating capacity	52,6	63,3	68,9	81,2	90,5	109	120	136	149	168	188	215	235	kW
	Power input	13,5	16,3	17,9	20,9	23,7	28,7	30,8	35,2	38,5	44,4	48,8	55,8	61,4	kW
	COP	3,90	3,88	3,85	3,89	3,82	3,80	3,90	3,86	3,87	3,78	3,85	3,85	3,83	W/W
SP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214	kW
	Power input	15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3	kW
	EER	3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04	W/W
A7C50	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW
	Power input	15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8	kW
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	W/W
A7C45	Heating capacity	52,6	63,3	68,9	81,2	90,5	109	120	136	149	168	188	215	235	kW
	Power input	13,5	16,3	17,9	20,9	23,7	28,7	30,8	35,2	38,5	44,4	48,8	55,8	61,4	kW
	COP	3,90	3,88	3,85	3,89	3,82	3,80	3,90	3,86	3,87	3,78	3,85	3,85	3,83	W/W

The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C
A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C
A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	88	88	89	89	89	91	91	91	96	97	97	98	98	dB(A)
Sound pressure level at 1 meter	70	70	71	71	71	73	73	73	78	79	79	80	80	dB(A)
Sound pressure level at 5 meters	61	61	62	62	62	65	65	65	69	70	70	71	71	dB(A)
Sound pressure level at 10 meters	56	56	57	57	57	59	59	59	64	65	65	66	66	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	85	85	86	86	86	88	88	88	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	67	67	68	68	68	70	70	70	75	76	76	77	77	dB(A)
Sound pressure level at 5 meters	58	58	59	59	59	62	62	62	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	53	53	54	54	54	56	56	56	61	62	62	63	63	dB(A)

The values are referred to units without options and accessories.

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3 - 50													V-ph-Hz
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Source side heat exchanger type	finned coil													-
Fans type	centrifugal													-
N° fans	1			2			3			4			n°	
Liquid line connection	7/8"			1 1/8"			1 3/8"			-			-	
Gas line connection	1 5/8"			2 1/8"			-			-			-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	43,2	48,8	56,7	62,1	73,0	80,5	95,0	103	117	145	158	188	199	A
FLI - Full load power input at maximum tolerated conditions	25,2	28,0	33,0	35,6	40,8	47,3	58,3	63,8	72,8	88,7	96,3	113	120	kW
MIC - Maximum instantaneous current of the unit	137	147	152	177	216	269	264	272	278	370	383	384	420	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	92,4	99,4	105	121	147	179	180	188	194	222	268	277	301	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10*	48	-10	40*	°C
Evaporating temperature (dew point)	SR, SP	1	20	-	-	°C
Condensing temperature (dew point)	SP	-	-	35	60	°C
Water outlet temperature (VD)	SR, SP	30	70	30	70	(°C)
Water outlet temperature (VR)	SR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

Aeraulic performance

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Available static head	150	150	150	150	150	150	150	150	150	150	150	150	150	Pa

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	15,1	17,9	19,8	23,0	26,8	31,1	34,4	38,2	43,1	49,3	54,7	61,8	68,4	kW
	EER	3,37	3,36	3,32	3,36	3,30	3,28	3,34	3,30	3,29	3,27	3,24	3,27	3,29	W/W
	Heating recovery capacity	14,8	17,4	19,1	22,4	25,6	29,6	33,2	36,5	41,0	46,6	51,5	58,6	65,1	kW
	Water flow rate recovery	0,70	0,83	0,91	1,07	1,22	1,42	1,59	1,74	1,96	2,23	2,46	2,80	3,11	l/s
	Water pressure drop recovery	7	11	13	17	22	18	22	12	16	20	24	20	24	kPa
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	49,2	59,4	64,6	75,5	83,2	100	111	124	137	155	173	200	222	kW
	Total power input	14,9	18,1	19,8	23,1	25,9	30,9	34,2	38,1	42,6	48,2	54,0	60,8	68,1	kW
	EER	3,30	3,28	3,26	3,27	3,21	3,24	3,25	3,25	3,22	3,22	3,20	3,29	3,26	W/W
	Heating recovery capacity	14,3	17,2	18,7	21,9	24,1	29,1	32,2	35,8	39,7	45,0	50,2	58,0	64,5	kW
	Water flow rate recovery	0,68	0,82	0,89	1,05	1,15	1,39	1,54	1,71	1,90	2,15	2,40	2,77	3,08	l/s
	Water pressure drop recovery	7	11	12	17	20	17	20	12	15	19	23	20	23	kPa

Total Recovery Version (VR) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	14,9	17,7	19,6	22,7	26,5	30,8	34,1	37,8	42,7	48,8	54,1	61,2	67,7	kW
	EER	3,42	3,40	3,36	3,41	3,34	3,31	3,37	3,33	3,33	3,30	3,27	3,30	3,32	W/W
	Heating recovery capacity	65,0	76,9	84,5	98,9	114	131	147	162	182	207	229	260	289	kW
	Water flow rate recovery	3,11	3,67	4,04	4,73	5,43	6,28	7,02	7,73	8,70	9,89	10,9	12,4	13,8	l/s
	Water pressure drop recovery	41	57	48	53	59	58	62	56	61	61	62	65	65	kPa

Data declared according to EN 14511. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

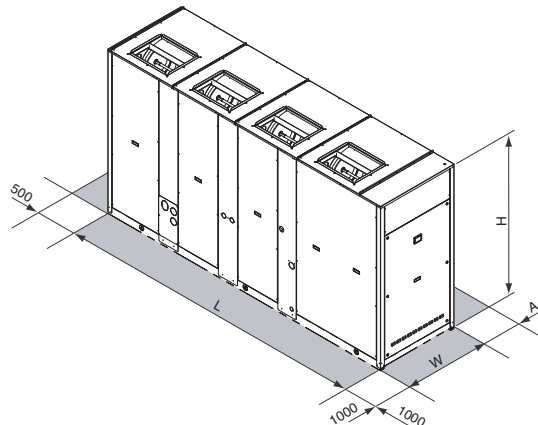

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322			4080	mm
W			954				1104			1104			1104	mm
H			1760				1760			2160			2160	mm
A			1600							2000				mm
Operating maximum weight	1078	1082	1102	1143	1168	1684	1765	1825	2000	2042	2094	2423	2467	kg



Available range

Unit type

- SR Condensing unit
- SP Heat pump condensing unit (reversible on the refrigerant side)

Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Source temperature level

- M Medium temperature level
- A High temperature level

Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on

damper supports, thermostatic expansion valve (only for SP), reverse cycle valve, double inlet centrifugal fans with forward curved blades, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

Options

Compressor starting

- standard (contactors)
- soft starter

Fans control

- on-off control
- modulating control INVERTER (condensation / evaporation control)

Compressor power factor correction

Electrical load protection

- fuses
- thermal magnetic circuit breakers

Coil condensate tray

(standard for SP)

Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for SP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Remote plate heat exchanger

Liquid line

NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216	kW
	Power input	15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6	kW
	EER	3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06	W/W
SR	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216	kW
	Power input	15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6	kW
	EER	3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06	W/W
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214	kW
	Power input	15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3	kW
	EER	3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04	W/W
A7C50	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW
	Power input	15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8	kW
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	W/W
A7C45	Heating capacity	52,6	63,3	68,9	81,2	90,5	109	120	136	149	168	188	215	235	kW
	Power input	13,5	16,3	17,9	20,9	23,7	28,7	30,8	35,2	38,5	44,4	48,8	55,8	61,4	kW
	COP	3,90	3,88	3,85	3,89	3,82	3,80	3,90	3,86	3,87	3,78	3,85	3,85	3,83	W/W
SP	Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5	Cooling capacity	47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214	kW
	Power input	15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3	kW
	EER	3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04	W/W
A7C50	Heating capacity	47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214	kW
	Power input	15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8	kW
	COP	3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07	W/W
A7C45	Heating capacity	52,6	63,3	68,9	81,2	90,5	109	120	136	149	168	188	215	235	kW
	Power input	13,5	16,3	17,9	20,9	23,7	28,7	30,8	35,2	38,5	44,4	48,8	55,8	61,4	kW
	COP	3,90	3,88	3,85	3,89	3,82	3,80	3,90	3,86	3,87	3,78	3,85	3,85	3,83	W/W

The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
COP (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

A35E5 = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C - superheating 5°C
A7C50 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C
A7C45 = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

Acoustic performances

Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	88	88	89	89	89	91	91	91	96	97	97	98	98	dB(A)
Sound pressure level at 1 meter	70	70	71	71	71	73	73	73	78	79	79	80	80	dB(A)
Sound pressure level at 5 meters	61	61	62	62	62	65	65	65	69	70	70	71	71	dB(A)
Sound pressure level at 10 meters	56	56	57	57	57	59	59	59	64	65	65	66	66	dB(A)
Low noise setting up (AS)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Sound power level	85	85	86	86	86	88	88	88	93	94	94	95	95	dB(A)
Sound pressure level at 1 meter	67	67	68	68	68	70	70	70	75	76	76	77	77	dB(A)
Sound pressure level at 5 meters	58	58	59	59	59	62	62	62	66	67	67	68	68	dB(A)
Sound pressure level at 10 meters	53	53	54	54	54	56	56	56	61	62	62	63	63	dB(A)

The values are referred to units without options and accessories.

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Power supply	400 - 3 - 50													V-ph-Hz
Compressor type	scroll													-
N° compressors / N° refrigerant circuits	2 / 1													n°
Source side heat exchanger type	finned coil													-
Fans type	centrifugal													-
N° fans	1			2			3			4			n°	
Liquid line connection	7/8"			1 1/8"			1 3/8"			-			-	
Gas line connection	1 5/8"			2 1/8"			-			-			-	

Electrical data

Standard unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
FLA - Full load current at maximum tolerated conditions	43,2	48,8	56,7	62,1	73,0	80,5	95,0	103	117	145	158	188	199	A
FLI - Full load power input at maximum tolerated conditions	25,2	28,0	33,0	35,6	40,8	47,3	58,3	63,8	72,8	88,7	96,3	113	120	kW
MIC - Maximum instantaneous current of the unit	137	147	152	177	216	269	264	272	278	370	383	384	420	A
MIC SS - Maximum instantaneous current of the unit with soft starter options	92,4	99,4	105	121	147	179	180	188	194	222	268	277	301	A

Operative range

Temperature	Unit type	Cooling		Heating		
		min	max	min	max	
Outdoor air inlet temperature	SR, SP	-10*	48	-10	40*	°C
Evaporating temperature (dew point)	SR, SP	1	20	-	-	°C
Condensing temperature (dew point)	SP	-	-	35	60	°C
Water outlet temperature (VD)	SR, SP	30	70	30	70	(°C)
Water outlet temperature (VR)	SR	30	55	-	-	(°C)

* with fans modulating control option (condensation / evaporation control)

Aeraulic performance

Unit	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Available static head	150	150	150	150	150	150	150	150	150	150	150	150	150	Pa

VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger. The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	15,1	17,9	19,8	23,0	26,8	31,1	34,4	38,2	43,1	49,3	54,7	61,8	68,4	kW
	EER	3,37	3,36	3,32	3,36	3,30	3,28	3,34	3,30	3,29	3,27	3,24	3,27	3,29	W/W
	Heating recovery capacity	14,8	17,4	19,1	22,4	25,6	29,6	33,2	36,5	41,0	46,6	51,5	58,6	65,1	kW
	Water flow rate recovery	0,70	0,83	0,91	1,07	1,22	1,42	1,59	1,74	1,96	2,23	2,46	2,80	3,11	l/s
	Water pressure drop recovery	7	11	13	17	22	18	22	12	16	20	24	20	24	kPa
SP	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	49,2	59,4	64,6	75,5	83,2	100	111	124	137	155	173	200	222	kW
	Total power input	14,9	18,1	19,8	23,1	25,9	30,9	34,2	38,1	42,6	48,2	54,0	60,8	68,1	kW
	EER	3,30	3,28	3,26	3,27	3,21	3,24	3,25	3,25	3,22	3,22	3,20	3,29	3,26	W/W
	Heating recovery capacity	14,3	17,2	18,7	21,9	24,1	29,1	32,2	35,8	39,7	45,0	50,2	58,0	64,5	kW
	Water flow rate recovery	0,68	0,82	0,89	1,05	1,15	1,39	1,54	1,71	1,90	2,15	2,40	2,77	3,08	l/s
	Water pressure drop recovery	7	11	12	17	20	17	20	12	15	19	23	20	23	kPa

Total Recovery Version (VR) - NOMINAL performances

SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	kW
	Total power input	14,9	17,7	19,6	22,7	26,5	30,8	34,1	37,8	42,7	48,8	54,1	61,2	67,7	kW
	EER	3,42	3,40	3,36	3,41	3,34	3,31	3,37	3,33	3,33	3,30	3,27	3,30	3,32	W/W
	Heating recovery capacity	65,0	76,9	84,5	98,9	114	131	147	162	182	207	229	260	289	kW
	Water flow rate recovery	3,11	3,67	4,04	4,73	5,43	6,28	7,02	7,73	8,70	9,89	10,9	12,4	13,8	l/s
	Water pressure drop recovery	41	57	48	53	59	58	62	56	61	61	62	65	65	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

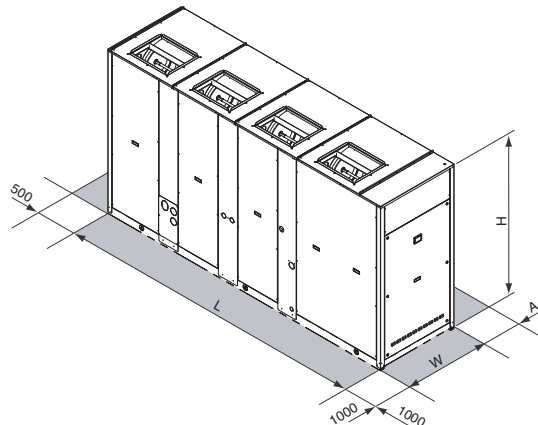

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L			2480				3322			3322		4080		mm
W			954				1104			1104		1104		mm
H			1760				1760			2160		2160		mm
A			1600							2000				mm
Operating maximum weight	1078	1082	1102	1143	1168	1684	1765	1825	2000	2042	2094	2423	2467	kg

> EGW

CONDENSERLESS UNITS FOR INDOOR INSTALLATION



ADAPTIVE
FUNCTION



Unit with closing panels

Available range

Unit type

- IR Condenserless unit
- BR Condenserless unit Brine

Version

- VB Base version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up
- AX eXtra low noise setting up

Unit description

This series of condenserless unit satisfies the cooling and heating requirements of commercial and industrial plants of medium size.

All the units are suitable for indoor installation and can be applied to fan coil plants and radiant floor plants.

The refrigerant circuit is equipped with 2 scroll compressors, mounted on rubber vibration-damper supports, plant side heat exchanger brazed plate-type in stainless steel (AISI 316), complete with thermal insulation shell and differential pressure switch, thermostatic expansion valve or electronic expansion valve (as option), dehydrator filter, solenoid valve to shut-off the liquid line, shut-off ball valves on

the discharge and liquid lines, refrigerant circuit protected by refrigerant safety valve, low and high pressure switches, electrical panel for power and control complete with main breaker power supply with door lock function microprocessor controller with keyboard-display, and phase sequence controller (standard). The units can be chosen in Basic setting up (AB) (unit without closing panels), Low noise setting up (AS), featuring closing panels coated with acoustic material, Extra Low noise setting up (AX) featuring closing panels coated with superior acoustic material and soundproofing jackets on the compressors.

The units are suitable to be combined with remote condensers cooled by air (coil and fans) or remote condensers cooled by water (plates or shell and tube heat exchanger). The electronic controller can manage the numerous ways used on the market for the head pressure control for condensation by air and for condensation by water. A wide range of options and accessories completes the commercial offer. All the units are carefully built in compliance with the current regulations and individually tested.

The units are supplied with charge of NITROGEN in order to avoid the entrance of air inside the refrigerant circuit.

Options

Expansion valve

- thermostatic
- electronic

Suitable for outdoor installation

Accessories

- Rubber vibration dampers
- Remote controller
- Serial Interface Modbus-RS 485
- Programmer clock
- Phase sequence and voltage controller
- Low temperature kit
- High and low pressure gauges
- High temperature thermostat
- Compressors shut-off valves
- Outdoor air sensor
- Water flow switch
- Victaulic hydraulic fittings
- Victaulic bends
- Victaulic water shut-off valves
- Victaulic water filter
- 2-way valve for condensing control
- 3-way valve for condensing control
- Compressors start-up with soft starter
- Compressors power factor correction
- Electrical load protection with thermal magnetic circuit breakers
- Remote condenser cooled by air

CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Condensation control
- Remote stand by



NET NOMINAL performances - Standard plants

IR	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2		
C45W7	Cooling capacity	64,8	72,1	85,5	97,2	109	123	138	158	178	201	222	kW
	Power input	17,8	19,5	23,5	26,8	30,2	34,2	38,3	43,6	48,9	55,3	61,6	kW
	EER	3,63	3,69	3,64	3,63	3,60	3,59	3,59	3,61	3,63	3,63	3,60	W/W
	Water flow rate source side	3,12	3,46	4,11	4,67	5,24	5,90	6,62	7,58	8,54	9,66	10,7	l/s
	Pressure drops source side	41	32	35	36	38	36	39	40	42	42	42	kPa
C50W7	Cooling capacity	60,7	67,7	80,6	91,5	102,5	115,4	129,3	148,2	167,0	188,9	208,7	kW
	Power input	19,7	21,7	26,2	29,8	33,5	37,8	42,2	48,1	53,9	61,0	68,0	kW
	EER	3,07	3,12	3,08	3,07	3,06	3,05	3,06	3,08	3,10	3,10	3,07	W/W
	Water flow rate source side	2,91	3,25	3,87	4,40	4,92	5,54	6,21	7,12	8,03	9,08	10,0	l/s
	Pressure drops source side	36	28	31	31	34	32	35	35	37	37	38	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.
EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit
C50W7 = condensing temperature (dew point) = 50 °C - subcooling = 5°C - plant : water in 12°C out 7°C
C45W7 = condensing temperature (dew point) = 45 °C - subcooling = 5°C - plant : water in 12°C out 7°C

Acoustic performances

Base setting up (AB)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	75	76	77	77	77	78	78	79	79	80	80	dB(A)
Sound pressure level at 1 meter	59	60	61	61	61	62	62	63	63	64	64	dB(A)
Sound pressure level at 5 meters	49	50	51	51	51	52	52	53	53	54	54	dB(A)
Sound pressure level at 10 meters	44	45	46	46	46	47	47	48	48	49	49	dB(A)
Low noise setting up (AS)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	71	72	73	73	73	74	74	75	75	76	76	dB(A)
Sound pressure level at 1 meter	55	56	57	57	57	58	58	59	59	60	60	dB(A)
Sound pressure level at 5 meters	45	46	47	47	47	48	48	49	49	50	50	dB(A)
Sound pressure level at 10 meters	40	41	42	42	42	43	43	44	44	45	45	dB(A)
eXtra low noise setting up (AX)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	67	68	69	69	69	70	70	71	71	72	72	dB(A)
Sound pressure level at 1 meter	51	52	53	53	53	54	54	55	55	56	56	dB(A)
Sound pressure level at 5 meters	41	42	43	43	43	44	44	45	45	46	46	dB(A)
Sound pressure level at 10 meters	36	37	38	38	38	39	39	40	40	41	41	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions C50W7.
 Unit placed in free field on reflecting surface (directional factor equal to 2).
 The sound power level is measured according to ISO 9614 standard.
 The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Power supply	400 - 3 - 50											V-ph-Hz
Max working pressure (HP-PS)	43											bar
Compressor type	scroll											-
N° compressors / N° refrigerant circuits	2 / 1											n°
Plant side heat exchanger type	stainless steel brazed plates											-
IN/OUT Plant side hydraulic fittings	2" 1/2 VICTAULIC											"
Refrigerant liquid line fitting	28 ODS					35 ODS						mm
Refrigerant gas line fitting	42 ODS											mm

Electrical data


Standard unit	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
FLA - Full load current at maximum tolerated conditions	45	51	62	68	74	82	90	105	120	142	164	A
FLI - Full load power input at maximum tolerated conditions	26	29	34	40	45	50	55	63	72	83	93	kW
MIC - Maximum instantaneous current of the unit	141	166	204	256	262	309	317	355	370	454	476	A

Operating range

Temperature	Unit type	Cooling		
		min	max	
Condensing temp (dew point)	IR, BR	30	60	(°C)
Water outlet temperature plant side	IR	5	20	(°C)
Water outlet temperature plant side	BR	-12	5	(°C)

DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

(reference drawing: unit with closing panel)

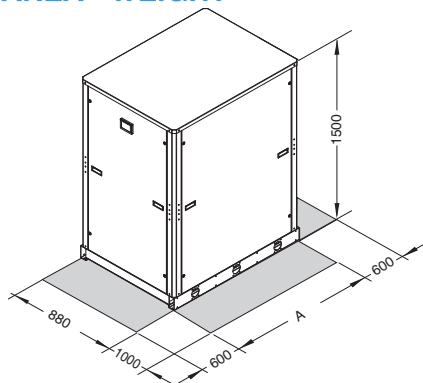

Models	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2		
A	880											1175	mm
Operating maximum weight	368	378	385	501	581	607	632	669	694	724	747	kg	

Remote condenser

This series of remote axial condensers uses copper pipes with special internal riffling and a high efficiency fin.

The fin has been specially designed to guarantee a high thermal exchange coefficient with low air pressure drops. By combining both special tubes and fins the following features can be achieved:

- Maximum capacity related to the heat exchanger's dimensions.
- Minimum refrigerant charge.
- The most strict environment standards for sound pollution can be met.

This new series of axial condensers is equipped with scythe-shaped blades to reduce the sound emission. From the noise level point of view, all models can be supplied as basic version (AB), low noise version (AS) or extra low noise version (AX). To guarantee solidity, strength and the maximum resistance to atmospheric agents the bearing and the casing are manufactured with galvanized steel and oven painted with a polyurethane resin (the standard colour is RAL 7035).

Options

- Special fins (Copper, Painted Aluminium, ecc.).
- Special motors
- Vertical / Horizontal air flow
- EC fans



Accessories

All models can be equipped with several accessories as:

- Rubber Vibrations Dampers
- Modulating control of the fans with cut of phase regulator
- Modulating control of the fans with inverter regulator
- Electrical Wiring Box, allows a fast and safe electrical installation of the unit since all wires and thermal protections of the fans are connected inside a waterproof box (IP54) to a terminal block where the installer connect the electrical supply and the fans thermal switches signal.
- Electrical Panel CE this accessory (like the electrical wiring box) allows a fast and safe electrical installation and moreover simplify the standard and non standard maintenance of the unit. The accessory is in fact composed by main electrical switch, fuses and contactors of the fans, transformer to supply an alarm auxiliary relè, terminal block for remote ON-OFF (i.e. sent by the condenserless unit).

Technical data

Unit	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Power supply	400 - 3 - 50											V-ph-Hz
Fan type	axial											-
Max working pressure (PS)	45											bar
Coil exchanger type	Aluminum fins and copper tubes											-

Acoustic performances


Base setting up (AB)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	80	80	82	83	83	83	83	85	85	85	85	dB(A)
Sound pressure level at 1 meter	63	63	65	66	66	66	66	68	68	68	68	dB(A)
Sound pressure level at 5 meters	53	53	55	56	56	56	56	58	58	58	58	dB(A)
Sound pressure level at 10 meters	48	48	50	51	51	51	51	53	53	53	53	dB(A)
Low noise setting up (AS)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	75	75	76	76	76	76	76	76	77	77	77	dB(A)
Sound pressure level at 1 meter	58	58	57	57	57	59	59	59	60	60	60	dB(A)
Sound pressure level at 5 meters	48	48	47	47	47	49	49	49	50	50	50	dB(A)
Sound pressure level at 10 meters	43	43	42	42	42	44	44	44	45	45	45	dB(A)
eXtra low noise setting up (AX)	70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Sound power level	68	68	68	68	70	70	70	71	71	73	73	dB(A)
Sound pressure level at 1 meter	51	51	51	51	53	53	53	54	54	56	56	dB(A)
Sound pressure level at 5 meters	41	41	41	41	43	43	43	44	44	46	46	dB(A)
Sound pressure level at 10 meters	36	36	36	36	38	38	38	39	39	41	41	dB(A)

Base setting up (AB)		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Refrigerant connections	Gas	1x42	1x42	1x42	1x42	1x42	1x42	1x42	1x42	1x54	1x54	1x54	n° x Ø
	Liquid	1x35	1x35	1x35	1x28	1x35	1x35	1x35	1x35	1x42	1x42	1x42	n° x Ø
Fan specification	Fan	2	2	3	2	2	2	2	3	3	3	3	n°
	Diameter	630	630	630	800	800	800	800	800	800	800	800	mm
	Air flow rate	5556	5556	8917	11778	10889	10889	10222	17667	16333	15333	15333	l/s
	Power input	1,46	1,46	2,19	4,00	4,00	4,00	4,00	6,00	6,00	6,00	6,00	kW
Standard configuration	Length [L]	2630	2630	3770	3230	3230	3230	3230	4580	4580	4580	4580	mm
	Height [A]	1230	1230	1230	1370	1370	1370	1370	1370	1370	1370	1370	mm
	Depth [P]	600	600	600	800	800	800	800	800	800	800	800	mm
Configuration with support brackets	Length [L]	2630	2630	3770	3230	3230	3230	3230	4580	4580	4580	4580	mm
	Height [A]	990	990	990	1565	1565	1565	1565	1565	1565	1565	1565	mm
	Depth [P]	1230	1230	1230	1370	1370	1370	1370	1370	1370	1370	1370	mm
Weight		166	166	221	279	302	302	324	413	447	481	481	kg


Low noise setting up (AS)		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Refrigerant connections	Gas	1x42	1x42	1x42	1x42	1x42	1x42	1x54	1x54	2x42	2x42	2x42	n° x Ø
	Liquid	1x35	1x35	1x28	1x35	1x35	1x35	1x42	1x42	2x35	2x35	2x35	n° x Ø
Fan specification	Fan	3	3	2	2	2	3	3	3	4	4	4	n°
	Diameter	630	630	800	800	800	800	800	800	800	800	800	mm
	Air flow rate	6250	6250	9389	7944	7444	14083	11917	11167	15222	14111	14111	l/s
	Power input	0,99	0,99	1,96	1,96	1,96	2,94	2,94	2,94	3,92	3,92	3,92	kW
Standard configuration	Length [L]	3770	3770	3230	3230	3230	4580	4580	4580	3230	3230	3230	mm
	Height [A]	1230	1230	1370	1370	1370	1370	1370	1370	2390	2390	2390	mm
	Depth [P]	600	600	800	800	800	800	800	800	800	800	800	mm
Configuration with support brackets	Length [L]	3770	3770	3230	3230	3230	4580	4580	4580	3230	3230	3230	mm
	Height [A]	990	990	1565	1565	1565	1565	1565	1565	1565	1565	1565	mm
	Depth [P]	1230	1230	1370	1370	1370	1370	1370	1370	2390	2390	2390	mm
Weight		221	221	279	302	324	413	447	481	502	543	543	kg

eXtra low noise setting up (AX)		70.2	80.2	90.2	105.2	120.2	135.2	150.2	170.2	190.2	215.2	240.2	
Refrigerant connections	Gas	1x42	1x42	1x42	1x42	1x42	1x54	1x54	2x42	2x42	2x42	2x42	n° x Ø
	Liquid	1x28	1x28	1x35	1x35	1x35	1x42	1x42	2x35	2x35	2x35	2x35	n° x Ø
Fan specification	Fan	2	2	2	2	3	3	3	4	4	4	4	n°
	Diameter	800	800	800	800	800	800	800	800	800	800	800	mm
	Air flow rate	6778	6778	6111	5611	10167	9167	8417	11556	10667	19333	19333	l/s
	Power input	1,18	1,18	1,18	1,18	1,77	1,77	1,77	2,36	2,36	2,36	2,36	kW
Standard configuration	Length [L]	3230	3230	3230	3230	4580	4580	4580	3230	3230	4580	4580	mm
	Height [A]	1370	1370	1370	1370	1370	1370	1370	2390	2390	2390	2390	mm
	Depth [P]	800	800	800	800	800	800	800	800	800	800	800	mm
Configuration with support brackets	Length [L]	3230	3230	3230	3230	4580	4580	4580	3230	3230	4580	4580	mm
	Height [A]	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	mm
	Depth [P]	1370	1370	1370	1370	1370	1370	1370	2390	2390	2390	2390	mm
Weight		279	279	302	324	413	447	481	502	543	680	680	kg

Standard configuration (horizontal air flow)

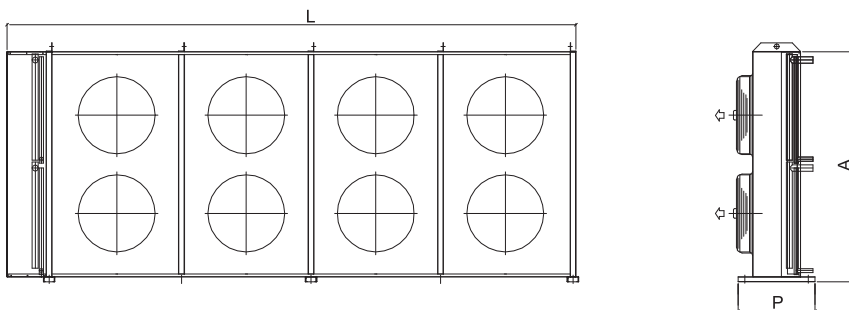

Configuration with Support Brackets (vertical air flow)

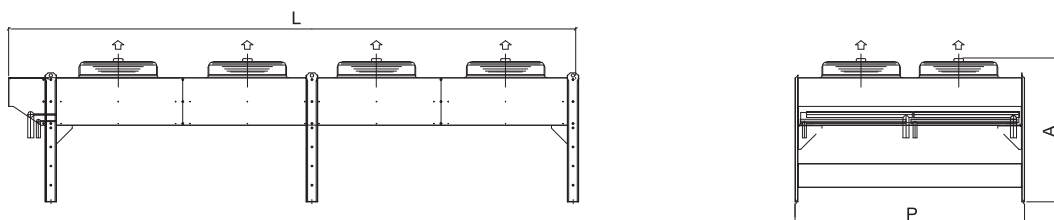

> EVW

CONDENSERLESS UNITS FOR INDOOR INSTALLATION



Available range

Unit type

- IR Condenserless unit
- BR Condenserless unit Brine

Version

- VB Base version
- VD Desuperheaters version

Acoustic setting up

- AB Base setting up
- AS Low noise setting up

Unit description

This range of condenserless units are designed to meet the climate control and air conditioning needs of large capacity systems in the industrial and commercial sectors. All the units are suitable for indoor installation and can be applied to fan coil plants.

Suitable for indoor installation, as standard the units are equipped with 1 or 2 TWIN-SCREW semihermetic compressors mounted on rubber vibration dampers able to modulate the capacity from minimum 25 (not for all configurations) to 100%, plant side exchanger shell and tube type complete with Victaulic water connections, fitted inside a shell of thermal insulation material to prevent condensation and heat exchange with the outside, optimised for R134a with high efficiency grooved tubes, protected by means of a water differential pressure

switch, 1 or 2 independent refrigerant circuits, complete with electronic expansion valve which optimises unit efficiency at full and partial loads and enables maximum seasonal efficiency, maximum and minimum pressure switch, PED safety valves, dehydrator filter, liquid/moisture indicator, compressor discharge and liquid shut-off valves, high and low pressure transducers, electrical panel with minimum protection IP54 containing the electrical equipment and all the components to control and command the unit complete with main supply breaker with door lock function, phase sequence control device, microprocessor controller with display (4 lines of 20 characters).

The units can be selected as Base setting up (AB) or as Low noise setting up (AS) that provides that compressor are positioned inside a soundproofed cabin, made with profiles and panels insulated with acoustic material.

The units are suitable to be combined with remote condensers cooled by air (coil and fans) or remote condensers cooled by water (plate or shell and tube heat exchanger). The electronic controller can manage the numerous ways used on the market for the head pressure control for condensation by air and for condensation by water. A wide range of options and accessories completes the commercial offer. All the units are carefully built in compliance with the current regulations and individually tested.

The units are supplied with charge of NITROGEN in order to avoid the entrance of air inside the refrigerant circuit.

Options

Compressor starting

- standard (contactors)
- soft starter

Compressors power factor correction

Electrical load protection

- standard (fuses)
- thermal magnetic circuit breakers

Evaporator flow switch (mounted)

Evaporator insulation higher thickness

Evaporator electrical heater for winter antifreeze

High and low pressure gauges

Compressor suction shut-off valve

Accessories

Rubber vibration dampers

External Water Storage Tank and Pumping Module complete with insulated carbon steel tank, single or twin pump and all hydronic components.

Antifreeze electrical heaters for Storage tank

Remote controller

Serial Interface Modbus on RS 485

Programmer clock

Phase sequence and voltage controller

Water flow switch

Remote condenser cooled by air

CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency.

Available functions :

- Double Set Point
- Demand Limit
- Dinamic set point
- Condensation control
- Remote stand by



NET NOMINAL performances - Standard plants

IR		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
C45W7	Cooling capacity	263	291	330	382	444	502	551	661	764	888	1001	1103	kW
	Power input	67,1	73,7	84,2	97	113	128	142	170	195	227	259	280	kW
	EER	3,92	3,95	3,92	3,95	3,93	3,92	3,89	3,88	3,93	3,92	3,87	3,93	W/W
	Water flow rate source side	12,7	14,0	15,9	18,3	21,4	24,1	26,5	31,8	36,7	42,8	48,3	53,0	l/s
	Pressure drops source side	41	32	40	38	48	38	47	47	40	52	53	41	kPa
C50W7	Cooling capacity	248	275	312	359	420	472	520	623	719	840	943	1042	kW
	Power input	73,4	80,2	91,8	105	124	139	154	185	211	249	281	307	kW
	EER	3,37	3,42	3,40	3,42	3,38	3,39	3,38	3,36	3,41	3,37	3,36	3,40	W/W
	Water flow rate source side	11,9	13,2	15,0	17,2	20,2	22,7	25,0	30,0	34,5	40,4	45,4	50,1	l/s
	Pressure drops source side	36	28	36	34	43	34	42	41	35	47	47	36	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

C50W7 = condensing temperature (dew point) = 50 °C - subcooling = 5°C - plant : water in 12°C out 7°C

C45W7 = condensing temperature (dew point) = 45 °C - subcooling = 5°C - plant : water in 12°C out 7°C

Desupeheater Version (VD) - NET NOMINAL performances

IR		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
C45W7 - W45	Cooling capacity	274	303	343	397	461	522	573	687	794	923	1041	1147	kW
	Total power input	65	72	82	94	110	125	138	166	189	221	252	273	kW
	EER	4,19	4,22	4,19	4,22	4,19	4,19	4,15	4,14	4,19	4,17	4,12	4,20	W/W
	HRE	5,11	5,15	5,11	5,14	5,10	5,11	5,07	5,06	5,11	5,09	5,04	5,12	W/W
	Water flow rate	13,2	14,5	16,5	19,1	22,2	25,1	27,6	33,1	38,2	44,5	50,2	55,2	l/s
	Water pressure	44	34	43	41	52	41	51	50	43	57	57	44	kPa
	Heating recovery capacity	60,2	66,5	75,7	86,9	101,1	115	127	152	175	202	231	252	kW
	Water flow rate recovery	2,88	3,18	3,61	4,15	4,83	5,50	6,05	7,27	8,35	9,66	11,0	12,0	l/s
	Water pressure drop recovery	8	9	9	12	11	9	11	9	12	11	9	10	kPa
	C50W7 - W45	Cooling capacity	257	286	325	373	437	491	541	647	747	873	980	1083
Total power input		71	78	89	102	121	136	150	180	205	243	274	299	kW
EER		3,60	3,66	3,63	3,65	3,61	3,62	3,60	3,59	3,65	3,59	3,58	3,63	W/W
HRE		4,53	4,59	4,56	4,58	4,53	4,55	4,53	4,52	4,58	4,51	4,50	4,56	W/W
Water flow rate		12,4	13,7	15,6	17,9	21,0	23,6	26,0	31,2	35,9	42,0	47,2	52,1	l/s
Water pressure		39	30	39	37	47	37	46	45	38	50	51	39	kPa
Heating recovery capacity		66,3	72,8	82,9	95,1	111,9	126	139	167	190	224	252	277	kW
Water flow rate recovery		3,17	3,48	3,96	4,54	5,35	6,02	6,63	7,97	9,09	10,71	12,1	13,2	l/s
Water pressure drop recovery		9	11	11	14	13	10	13	11	14	13	10	13	kPa

Data declared according to **EN 14511**. The values are referred to units without options and accessories.

EER (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

HRE (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

C50W7-W45 = condensing temperature (dew point) = 50 °C - subcooling = 5°C - plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

C45W7-W45 = condensing temperature (dew point) = 45 °C - subcooling = 5°C - plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C

Acoustic performances

Base setting up (AB)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level	97	97	97	98	98	98	98	99	100	100	100	100	dB(A)
Sound pressure level at 1 meter	79	79	79	80	80	80	80	80	81	81	81	81	dB(A)
Sound pressure level at 5 meters	70	70	70	72	72	72	71	72	73	73	73	73	dB(A)
Sound pressure level at 10 meters	65	65	65	67	67	67	66	67	68	68	68	68	dB(A)
Low noise setting up (AS)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level	92	93	92	93	93	94	94	94	95	95	96	96	dB(A)
Sound pressure level at 1 meter	74	75	74	75	75	76	76	75	76	76	77	77	dB(A)
Sound pressure level at 5 meters	65	66	65	66	66	67	67	67	68	68	69	69	dB(A)
Sound pressure level at 10 meters	60	61	60	61	61	62	62	62	63	63	64	64	dB(A)

The acoustic performances are referred to units operating in cooling mode at nominal conditions C50W7.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

Technical data

Unit	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2		
Power supply	400 - 3 - 50												V-ph-Hz	
Max working pressure (HP-PS)	20												bar	
Compressor type	twin-screw												-	
N° compressors / N° refrigerant circuits	1 / 1						2 / 2						n°	
Part load	25 / 100% continuous									12.5 / 100% continuous				
Plant side heat exchanger typex	shell and tube												-	
IN/OUT Plant side hydraulic fittings	DN125	DN125	DN125	DN150	DN150	DN150	DN200	DN150	DN200	DN200	DN200	DN200	-	
Refrigerant liquid line fitting	1x42	1x42	1x42	1x42	1x42	1x54	1x54	2x42	2x42	2x42	2x54	2x54	n° x Ø	
Refrigerant gas line fitting	1x67	1x67	1x67	1x67	1x67	1x76	1x76	2x67	2x67	2x67	2x76	2x76	n° x Ø	


Electrical data

Standard unit	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
FLA - Full load current at maximum tolerated conditions	162	181	211	232	270	309	340	422	464	540	618	680	A
FLI - Full load power input at maximum tolerated conditions	99	110	129	144	169	190	209	257	287	339	380	418	kW
MIC - Maximum instantaneous current of the unit	520	612	665	436	465	586	650	876	668	735	895	990	A

Operating range

Temperature	Unit type	Cooling	
		min	max
Condensing temp (dew point)	IR, BR	30	60
Water outlet temperature plant side	IR	5	15
Water outlet temperature plant side	BR	-8	5

DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

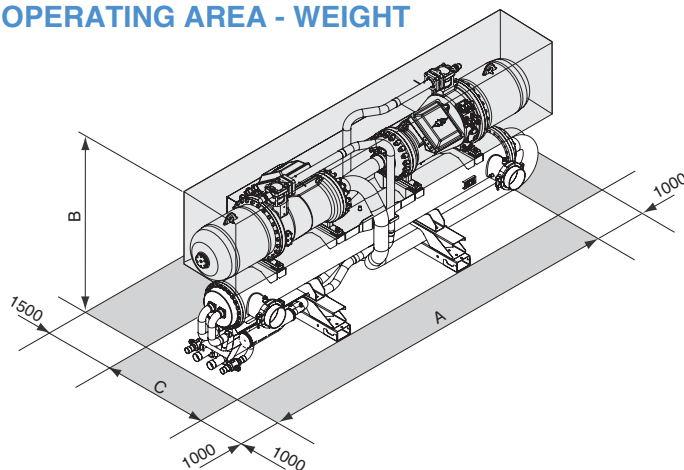

Model	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
A	3900	3900	3900	3900	3900	3900	3900	4320	4400	4400	4400	4400	mm
B	1845	1845	1845	1880	1880	2045	2045	1845	1880	1880	2045	2045	mm
C	1100	1100	1100	1100	1100	1100	1100	1190	1190	1190	1230	1230	mm
Operating maximum weight	1651	1669	1682	2249	2263	2329	2633	3105	4334	4367	4569	4635	kg

Remote condenser

This series of Remote Axial Condensers uses copper pipes with special internal rifling and a high efficiency fin.

The fin has been specially designed to guarantee a high thermal exchange coefficient with low air pressure drops. By combining both special tubes and fins the following features can be achieved:

- Maximum capacity related to the heat exchanger's dimensions.
- Minimum refrigerant charge.
- The most strict environment standards for sound pollution can be met.

This new series of axial condensers is equipped with fans with scythe-shaped blades to reduce the sound emission. From the noise level point of view, all models can be supplied as basic version (AB), low noise version (AS) or extra low noise version (AX).

To guarantee solidity, strength and the maximum resistance to atmospheric agents the bearing and the casing are



manufactured with galvanized steel and oven painted with a polyurethane resin (the standard colour is RAL 7035).

Options

- Special fins (Copper, Painted Aluminium, ecc.).
- Special motors
- Vertical / Horizontal air flow
- EC fans

Accessories

All models can be equipped with several accessories as:

- Rubber Vibrations Dampers
- Modulating control of the fans with cut of phase regulator
- Modulating control of the fans with inverter regulator
- Electrical Wiring Box, allows a fast and safe electrical installation of the unit since all wires and thermal protections of the fans are connected inside a waterproof box (IP54) to a terminal block where the installer connect the electrical supply and the fans thermal switches signal.
- Electrical Panel CE this accessory (like the electrical wiring box) allows a fast and safe electrical installation and moreover simplify the standard and non standard maintenance of the unit.

The accessory is in fact composed by main electrical switch, fuses and contactors of the fans, transformer to supply an alarm auxiliary relè, terminal block for remote ON-OFF (i.e. sent by the condenserless unit).

Technical data

Unit	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Power supply	400 - 3 - 50												V-ph-Hz
Fan type	axial												-
Max working pressure (PS)	30												bar
Exchanger type	Aluminum fins and copper tubes												-


Acoustic performances

Base setting up (AB)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level	86	88	88	88	89	89	90	90	91	91	93	99	dB(A)
Sound pressure level at 1 meter	70	72	72	72	73	73	74	74	74	74	76	82	dB(A)
Sound pressure level at 5 meters	59	61	61	61	62	62	63	63	63	63	65	71	dB(A)
Sound pressure level at 10 meters	54	56	56	56	57	57	58	58	58	58	60	66	dB(A)
Low noise setting up (AS)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level	81	81	81	82	82	83	83	84	84	86	90	90	dB(A)
Sound pressure level at 1 meter	65	65	65	66	66	67	67	67	67	69	73	73	dB(A)
Sound pressure level at 5 meters	54	54	54	55	55	56	56	56	56	58	62	62	dB(A)
Sound pressure level at 10 meters	49	49	49	50	50	51	51	51	51	53	57	57	dB(A)
eXtra low noise setting up (AX)	280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Sound power level	74	74	74	75	75	76	76	77	76	76	83	83	dB(A)
Sound pressure level at 1 meter	58	58	58	59	59	59	59	60	59	59	66	66	dB(A)
Sound pressure level at 5 meters	47	47	47	48	48	48	48	49	48	48	55	55	dB(A)
Sound pressure level at 10 meters	42	42	42	43	43	43	43	44	43	43	50	50	dB(A)


Remote condensers technical data

Base setting up (AB)		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Refrigerant connections	Gas	2x42	2x54	2x54	2x54	2x54	2x54	2x64	2x64	2x76	2x76	2x76	2x76	n° x Ø
	Liquid	2x35	2x42	2x42	2x42	2x35	2x42	2x42	2x42	2x42	2x54	2x54	2x54	n° x Ø
Fan specification	Fan	4	6	6	6	8	8	10	10	12	14	16	12	n°
	Diameter	800	800	800	800	800	800	800	800	800	800	800	900	mm
	Air flow rate	19667	31667	31667	29500	42222	39333	52778	49167	59000	68833	78667	100667	l/s
	Power input	8	12	12	12	16	16	20	20	24	28	32	43.2	kW
Standard configuration	Type												2	-
	Length [L]	3230	4580	4580	4580	5930	5930	7280	7280	8630	9980	11330	7990	mm
	Height [A]	2390	2390	2390	2390	2390	2390	2390	2390	2390	2390	2390	2262	mm
	Depth [P]	800	800	800	800	800	800	800	800	800	800	800	2400	mm
	Weight	543	742	742	804	982	1065	1222	1325	1585	1845	2106	2879	kg
Configuration with support brackets	Type												3	-
	Length [L]	3230	4580	4580	4580	5930	5930	7280	7280	8630	9980	11330	-	mm
	Height [A]	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	-	mm
	Depth [P]	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	-	mm
	Weight	569	768	768	830	1021	1104	1261	1364	1637	1897	2158	-	kg
Low noise setting up (AS)		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Refrigerant connections	Gas	2x54	2x54	2x54	2x54	2x54	2x64	2x64	2x76	2x76	2x76	2x76	2x76	n° x Ø
	Liquid	2x42	2x42	2x42	2x35	2x42	2x42	2x42	2x42	2x54	2x54	2x54	2x54	n° x Ø
Fan specification	Fan	6	6	6	8	8	10	10	12	14	16	12	12	n°
	Diameter	800	800	800	800	800	800	800	800	800	800	900	900	mm
	Air flow rate	24667	24667	22500	32889	30000	41111	37500	45000	52500	60000	87000	82333	l/s
	Power input	12	12	7.62	10.16	10.16	12.7	12.7	15.24	17.78	20.32	29.4	29.4	kW
Standard configuration	Type												1	2
	Length [L]	4580	4580	4580	5930	5930	7280	7280	8630	9980	11330	7990	7990	mm
	Height [A]	2390	2390	2390	2390	2390	2390	2390	2390	2390	2390	2262	2262	mm
	Depth [P]	800	800	800	800	800	800	800	800	800	800	2400	2400	mm
	Weight	742	742	804	982	1065	1222	1325	1585	1845	2106	2879	3056	kg
Configuration with support brackets	Type												3	-
	Length [L]	3230	4580	4580	4580	5930	5930	7280	7280	8630	9980	-	-	mm
	Height [A]	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	-	-	mm
	Depth [P]	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	-	-	mm
	Weight	768	768	830	1021	1104	1261	1364	1637	1897	2158	-	-	kg
eXtra low noise setting up (AX)		280.1	320.1	360.1	420.1	480.1	540.1	600.1	710.2	820.2	950.2	1100.2	1200.2	
Refrigerant connections	Gas	2x42	2x54	2x54	2x64	2x64	2x76	2x76	2x76	2x76	2x76	2x76	2x76	n° x Ø
	Liquid	2x35	2x35	2x42	2x42	2x42	2x42	2x54	2x54	2x64	2x64	2x64	2x64	n° x Ø
Fan specification	Fan	8	8	8	10	10	12	14	16	14	14	14	14	n°
	Diameter	800	800	800	800	800	800	800	800	800	900	900	900	mm
	Air flow rate	25778	23111	21333	28889	26667	32000	40444	46222	56389	52500	70000	70000	l/s
	Power input	4.7	4.7	4.7	5.9	5.9	7.1	8.3	9.4	9.5	9.5	15.5	15.5	kW
Standard configuration	Type												1	2
	Length [L]	5930	5930	5930	7280	7280	8630	9980	11380	9240	9240	9240	9240	mm
	Height [A]	2390	2390	2390	2390	2390	2390	2390	2390	2262	2262	2262	2262	mm
	Depth [P]	800	800	800	800	800	800	800	800	800	2400	2400	2400	mm
	Weight	900	982	1065	1222	1325	1585	1702	1942	3309	3515	3515	3515	kg
Configuration with support brackets	Type												3	-
	Length [L]	5930	5930	5930	7280	7280	8630	9980	11380	9240	9240	-	-	mm
	Height [A]	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	-	-	mm
	Depth [P]	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	-	-	mm
	Weight	939	1021	1104	1261	1364	1637	1754	1994	-	-	-	-	kg


Standard configuration type 1 (horizontal air flow)

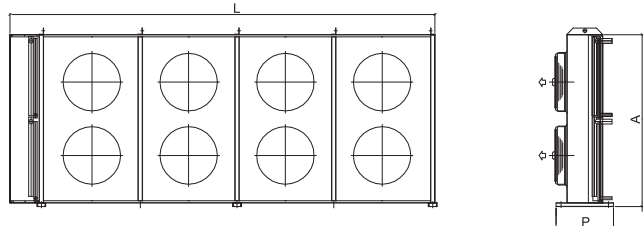

Standard configuration type 2 (vertical air flow)

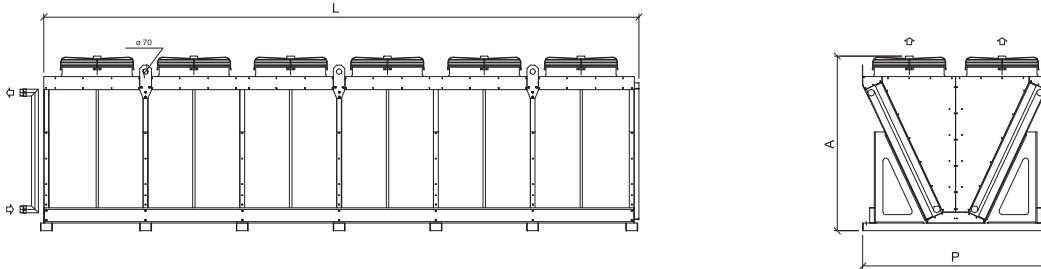

Configuration with Support Brackets Type 3 (vertical air flow)

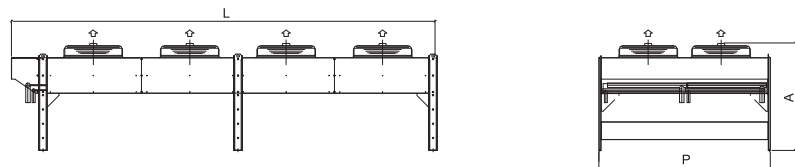

> Main characteristics terminal units

- FAN COIL
- CEILING CONCEALED
- DUCTED FAN COIL
- AQUASEL

> FAN COIL

FAN COIL WITH CENTRIFUGAL FANS

- Series **TOP FAN PLUS** features 2 versions:
- with cabinet and bottom air intake VM-B
 - with cabinet and frontal air intake VM-F
 - with 3-rows and 4-rows coil

Range include 9 sizes with air flow-rates up to 1,350 m³/h.

CASSETTE-TYPE FAN COIL

- Series **FCS** features 2 versions:
- standard systems with 2 pipes FCS-2T
 - systems with 4 pipes FCS-4T

Range include 6 sizes with two pipes and 3 with four pipes and air flow-rates up to 1,750 m³/h.

WALL-MOUNTED FAN COIL

- Series **VTP** supplied with remote control and three-way valve. The range comprises 4 sizes with air flow-rates up to 880 m³/h.



> CEILING CONCEALED

FAN COIL TYPE

Fan coil series **TOP FAN PLUS** features 2 versions:

- without cabinet, ceiling concealed, with six-speed motor
- without cabinet, ceiling concealed, with three-speed motor
- with 3-rows and 4-rows coil

Range include 9 sizes with air flow-rates up to 1,350 m³/h.


FAN COIL TYPE

VHF3 series units have centrifugal fans, low head, structure complete with soundproofing, condensate tray and air filter.

Range include 8 sizes with air flow rate up to 4,000 m³/h and head 50 Pa.

Series	Unit	Velocità	Portata aria	IP (Pressure)	Pa	PP	PPa	Tin	Tout	Fmax	FPC	Tout	UR	PP	Tin	Tout	Fmax	FPC	SWL
FCF	15	Vel. 1-max	218	20.0	0.10	0.88	7.00	12.0	0.2	4.40	18.1	89.0	2.80	70.0	60.0	0.2	5.18	0.00	
FCF	15	Vel. 2	170	30.0	0.68	0.74	7.00	11.5	0.2	4.40	14.0	87.0	2.40	70.0	61.4	0.2	6.10	0.00	
FCF	15	Vel. 3	130	20.0	0.77	0.86	7.00	10.5	0.2	4.40	11.7	99.0	1.80	70.0	62.6	0.2	6.10	0.00	
FCF	20	Vel. 1-max	280	20.0	1.40	1.04	7.00	12.0	0.2	4.90	18.6	83.0	3.48	70.0	60.0	0.2	8.70	0.00	
FCF	20	Vel. 2	210	30.0	1.20	0.91	7.00	11.3	0.2	6.90	19.0	89.0	3.15	70.0	61.4	0.2	8.70	0.00	
FCF	20	Vel. 3	140	30.0	0.88	0.71	7.00	10.4	0.2	6.90	11.9	96.0	2.38	70.0	63.8	0.2	8.70	0.00	
FCF	30	Vel. 1-max	420	40.0	2.10	1.62	7.00	12.0	0.4	14.8	14.1	85.0	5.90	70.0	60.0	0.5	17.6	0.00	
FCF	30	Vel. 2	310	40.0	1.88	1.40	7.00	11.4	0.4	14.8	12.4	90.0	4.88	70.0	61.7	0.5	17.6	0.00	
FCF	30	Vel. 3	220	40.0	1.48	1.09	7.00	10.5	0.4	14.8	12.1	96.0	3.40	70.0	63.8	0.5	17.6	0.00	
FCF	40	Vel. 1-max	515	40.0	2.80	2.06	7.00	12.0	0.5	23.0	13.0	83.0	6.90	70.0	60.0	0.6	24.3	0.00	
FCF	40	Vel. 2	400	40.0	2.45	1.78	7.00	11.4	0.5	23.0	12.6	86.0	5.45	70.0	61.4	0.6	24.3	0.00	
FCF	40	Vel. 3	290	40.0	1.90	1.39	7.00	10.4	0.5	23.0	12.0	91.0	4.00	70.0	63.8	0.6	24.3	0.00	
FCF	60	Vel. 1-max	615	50.0	3.40	2.42	7.00	12.0	0.6	14.0	18.2	80.0	7.80	70.0	60.0	0.7	14.1	0.00	
FCF	60	Vel. 2	510	50.0	3.01	2.25	7.00	11.4	0.6	14.0	13.8	88.0	6.40	70.0	61.5	0.7	14.1	0.00	
FCF	60	Vel. 3	380	50.0	2.38	1.71	7.00	10.5	0.6	14.0	12.3	90.0	4.83	70.0	63.7	0.7	14.1	0.00	
FCF	80	Vel. 1-max	790	50.0	4.00	2.90	7.00	12.0	0.7	18.0	14.4	80.0	9.40	70.0	60.0	0.8	18.0	0.00	
FCF	80	Vel. 2	600	50.0	3.88	2.89	7.00	11.4	0.7	18.0	14.2	84.0	7.90	70.0	61.4	0.8	18.0	0.00	
FCF	80	Vel. 3	430	50.0	2.80	1.99	7.00	10.5	0.7	18.0	12.4	89.0	5.80	70.0	63.8	0.8	18.0	0.00	
FCF	80	Vel. 1-max	1000	50.0	4.90	3.80	7.00	12.0	0.8	19.1	16.1	80.0	12.3	70.0	60.0	1.1	17.7	0.00	
FCF	80	Vel. 2	850	50.0	4.35	3.35	7.00	11.4	0.8	19.1	15.1	85.0	10.8	70.0	61.4	1.1	17.7	0.00	
FCF	90	Vel. 2	970	50.0	3.60	2.74	7.00	10.7	0.8	19.1	12.6	94.0	8.30	70.0	63.4	1.1	17.7	0.00	
FCF	100	Vel. 1-max	1200	50.0	6.10	4.62	7.00	12.0	1.0	9.90	15.4	83.0	14.9	70.0	60.0	1.3	10.8	0.00	
FCF	100	Vel. 2	970	50.0	5.50	4.05	7.00	11.5	1.0	9.90	14.3	84.0	12.5	70.0	61.4	1.3	10.8	0.00	
FCF	120	Vel. 2	670	30.0	4.40	3.15	7.00	10.6	1.0	9.90	12.8	88.0	9.60	70.0	63.4	1.3	10.8	0.00	
FCF	140	Vel. 1-max	1390	30.0	6.85	5.30	7.00	12.0	1.2	12.5	13.2	85.0	14.8	70.0	60.0	1.4	12.1	0.00	
FCF	150	Vel. 2	1070	30.0	6.10	4.62	7.00	11.5	1.2	12.5	14.0	89.0	13.3	70.0	61.4	1.4	12.1	0.00	

Terminal units range

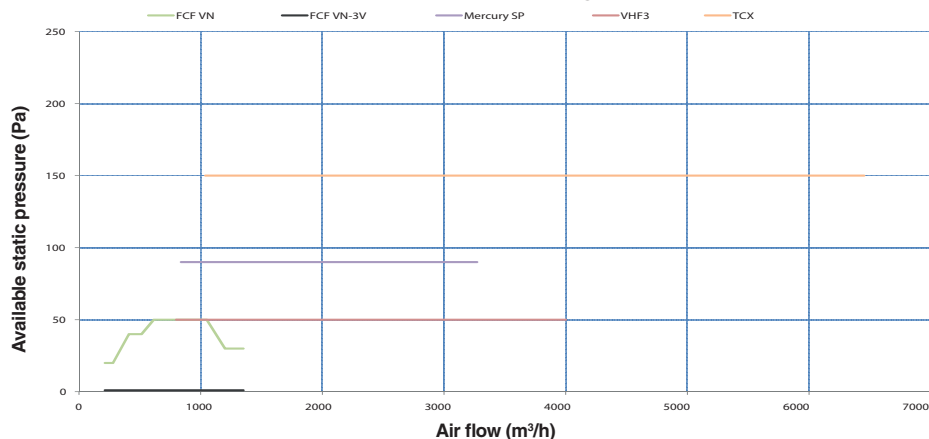

FCF PLUS



MERCURY SP

> DUCTED FAN COIL

FAN COIL IN SINGLE PANEL

MERCURY SP series with centrifugal fans, medium head.

Range include 8 sizes with air flow-rates up to 3,270 m³/h and head 90 Pa

FAN COILS IN DOUBLE PANEL

TCX series with centrifugal fans, high head, structure in double panel, featuring the following versions:

- systems with 2 pipes, heating only, 2 rows

- systems with 2 pipes, heating and cooling, 4 or 6 rows

- systems with 4 pipes, 2, 4 or 6 rows
- systems with 2 pipes, 4 or 6 rows+electric post-heating section or + drip separator section

Range include 7 sizes with air flow-rates up to 6,450 m³/h and head 150 Pa

> AQUASEL

The Ferrolì design staff has developed software for choosing the right FERROLÌ terminal unit for your system needs. FERROLÌ software calculates the performance values according to the inlet

air temperature/humidity, the water ΔT /temperature and, in the case of ceiling concealed or ducted units, it is possible to set a fan head value and recalculate the efficiency and air flow-rate of the units. There is also the selected choice of accessories the printing of the description of the unit specifications and a complete technical data sheet.

A sales tool much appreciated by professionals for its easy use and prompt answers

For further information, contact your local Ferrolì Industrial Climate Control Branch.

> Main characteristics terminal units

4XUT TERMINAL UNIT MANAGEMENT

The Ferroli team has developed a relay card enabling the management of up to 4 terminal units with a single control.

This is a relay card complete with single multiple contacts to feed the three speeds of the load with the option of controlling the valves for systems with 2 or 4 pipes through another two relays.



Technical characteristics

- **ENCLOSURE BOX** : made in plastic suitable for indoor installation.
- **ELECTRONIC BOARD** : positioned on a base, the relay card consists of 2 +3 relays, 6 terminal blocks and cable glands.
- **RELAYS** :
 - 2 single-contact relays for controlling valves (systems with 2 pipes and systems with 4 pipes),
 - 3 multiple-contact type relays for controlling the three fan speeds.
- **TERMINAL BLOCKS** : made in plastic and are complete with a spring device for clamping the electrical wires. To prevent installation errors, the names of the single contacts are given on the board (fig. b).
- **FIXING BRACKET** : The box comes complete with a bracket suitable for fixing to the structure of the Fan Coil TOP FAN (fig. a). Not suitable for other loads or uses.

4XUT System Operation

A 4XUT System card can control

- 2, 3, 4 exposed fan coil units VM-B, VM-F with 2 or 4 pipes,
- 2, 3, 4 recessed-mounted units VN-3V, VN or VHF3 with 2 or 4 pipes,
- 2, 3, 4 cassette-type fan coil units FCS with 2 or 4 pipes
- 2, 3, 4 Ducted-type fan coils MERCURY SP, or TCX type.

Each output terminal block must be used for a single load. The control voltage signal from the control, is repeated for a max. of 4 and sent to the loads connected. The electrical connections between control-card and card-terminal units (indicated with dashes in the diagram opposite) are the installer's responsibility.

Fig.a





Fig.b





NB: To connect more than 4 units, several 4XUT SYSTEM cards must be used. In this case the cards will be connected in parallel, and not the units. For more than 2 cards, the valve control must be taken from the relay of the first card.

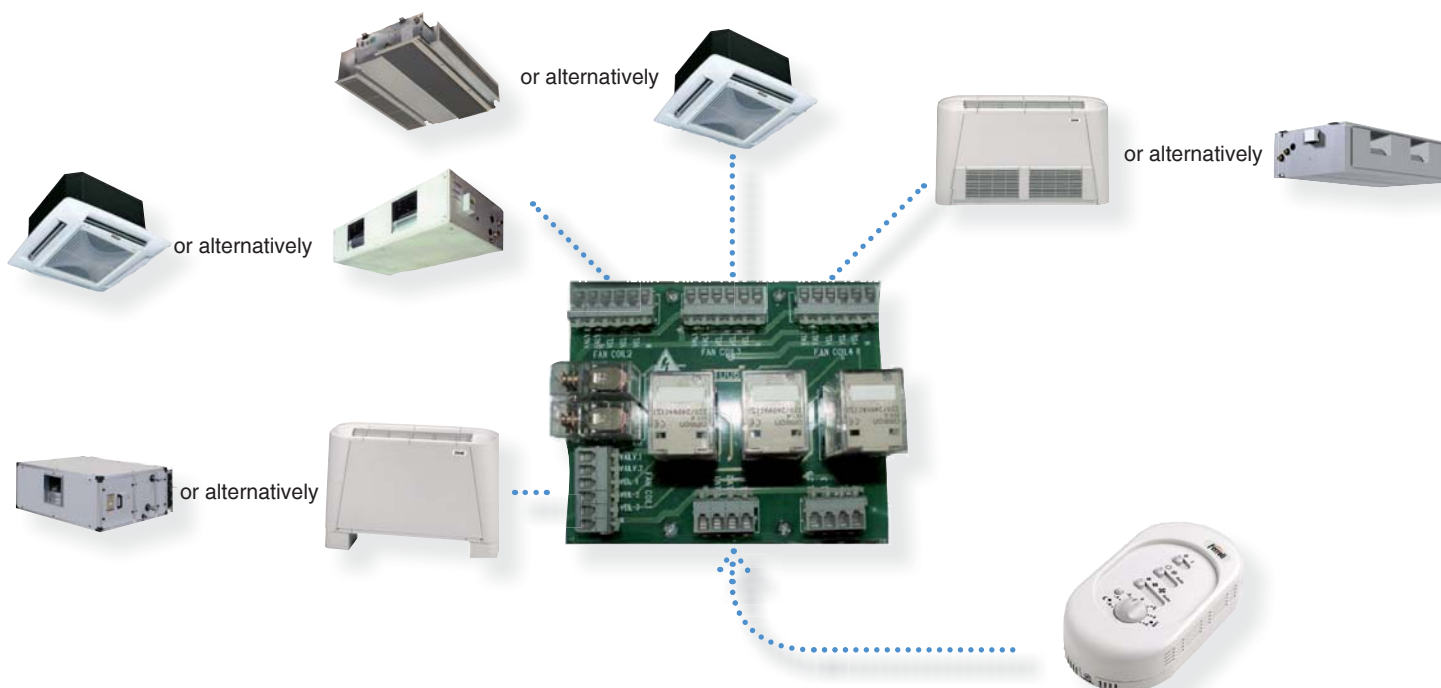

> TOP FAN PLUS

FAN COIL

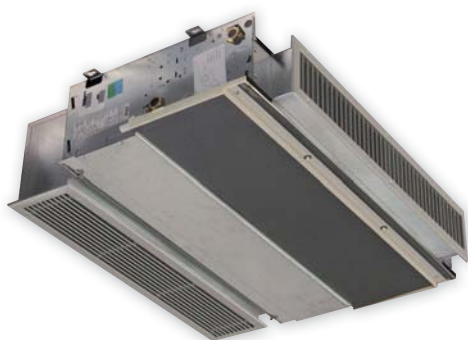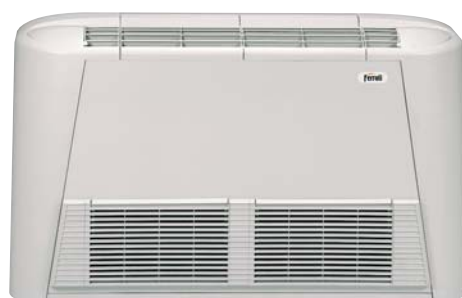

Units Series

Available versions

- VM-B bottom air intake
- VM-F frontal air intake
- VN ceiling concealed 6-speed
- VN-3V ceiling concealed 3-speed

Exchangers

- 3R with 3 rows
- 4R with 4 rows

VB unit specifications

Fan coil unit complying with Machine Directive 89/392 EEC and amendments 91/368 EEC, 93/44 EEC, 93/68 EEC, Low-Voltage Directives 72/23 EEC and Electromagnetic Compatibility Directives EMC 89/36 EEC. The fan coil unit is a terminal for the treatment of room air in the summer season (coil supplied with cold water) and in winter (coil supplied with hot water). These units are suitable for indoor installation, very compact and amply configurable to meet the requirements of highly qualified designers. The customer or the designer can find version with cabinet and with air intake from bottom (VM-B version) or with frontal air intake and version without cabinet ceiling concealed type with 6 speed fan for a short duct (VN version) or with 3 speed fan. The careful design of the main components, refined styling and the versatility of the product make it suitable for any type of installation in the residential, commercial or industrial context. Installation therefore only requires the electrical and hydraulic connections.

Construction characteristics

- **SUPPORT STRUCTURE:** in galvanised sheet metal of suitable thickness. There are slots at the back for fixing the unit.
- **HEAT EXCHANGE COIL:** copper pipe type arranged in staggered rows to increase heat exchange and aluminium finning in 3 or 4 rows, locked by mechanical expansion of the pipes. The manifolds have air vents, water drain holes and housing for the supply water temperature probe. The connections are located on the left side panel (facing the unit). The possibility of turning the coil is provided for.
- **CONDENSATE TRAY:** in thermoplastic material to prevent corrosion, it enables either vertical and horizontal unit installation. The drain hole is present on both sides.
- **3-speed FAN-MOTOR (versions VM-B VM-F and VN-3V):** the electric motor, protected against overloads, has three speeds with running condenser always on, directly coupled to the fans and cushioned by elastic supports. The dual-intake centrifugal fans have long blades in order to obtain high air flow-rates with reduced revolutions.
- **6-speed FAN-MOTOR (versions VN):** the electric motor has 6 speeds one or three of which selectable during installation to adjust flow-rate and head to the system's characteristics and enable a short ducting in line with the product's characteristics.

- **AIR FILTER:** regenerable simply by washing with water. For the VM-B version it is provided with a continuous guide in plastic material to facilitate extraction operations. For the VM-F version it is positioned in the front bottom air inlet grill. For the VN and VN-3V version it is complete with frame and wire screen.
- **CABINET (only VM-B and VM-F):** partly in epoxy powder coated steel sheet to ensure high protection against corrosion, and partly in anti-UV thermoplastic material. In the upper part there are air vents and the door for accessing the control panel, both in anti-UV thermoplastic material. The VM-F version also has a front grill in anti-UV thermoplastic material for the air inlet.

Main accessories/Options

ADJUSTMENT CONTROLS

INSTALLATION ON UNIT

- Cabinet **switch**
- Cabinet **standard thermostat**
- Cabinet **advanced thermostat**

REMOTE INSTALLATION

- Remote **switch**
- Remote **standard thermostat**
- Remote **advanced thermostat**

COMMON ACCESSORIES

- Hot-start consent thermostat
- 4XUT system
- 8SF Zone Master control
- 8SF main power module
- 8SF Local unit
- Expansion for systems with 4 pipes
- Expansion electrical heater management
- KNX expansion
- Supplementary tray vertical installation
- Supplementary tray horizontal installation
- 3-way valve main coil 3-4 R
- 2-way valve main coil 3-4 R
- Supplementary coil heating only
- 3-way valve supplementary coil
- 2-way valve supplementary coil
- Single-phase electrical heater
- Condensate drain pump

VM-B and VM-F ACCESSORIES


- Support feet (VM-B only)
- Adjustable fins
- Outside air inlet damper with front grill (VM-B only)
- Damper motor with single-phase power supply (VM-B only)
- Rear closing panel

VN and VN-3V ACCESSORIES

- Inlet grill
- Straight inlet flange
- Perpendicular inlet flange
- Straight outlet flange
- Perpendicular outlet flange
- Inlet plenum
- Outlet plenum
- Outlet grill

Common Data		15	20	30	40	50	60	80	100	120	
N° fan		1	1	1	1	2	2	2	2	2	N°
Air flow rate	max.	215	280	410	515	615	750	1050	1200	1350	m³/h
	med.	170	210	310	400	510	600	850	970	1070	m³/h
	min	110	140	220	290	350	410	570	670	720	m³/h
VN-3V external static pressure		0	0	0	0	0	0	0	0	0	Pa
VN external static pressure		20	20	40	40	40	50	50	30	30	Pa
Heating capacity electrical heater		800	800	1500	1500	2200	2200	2200	2600	2600	W
VM-B unit weight	3 rows	15	15	21	21	28	28	28	36	36	kg
VM-F unit weight	3 rows	14	14	20	20	27	27	27	34	34	kg
VN e VN-3V unit weight	3 rows	11	11	15	15	22	22	22	29	29	kg
VM-B unit weight	4 rows	15.8	15.8	22.5	22.5	30	30	30	39	39	kg
VM-F unit weight	4 rows	14.8	14.8	21.5	21.5	29	29	29	37	37	kg
VN e VN-3V unit weight	4 rows	11.8	11.8	16.5	16.5	24	24	25	32	32	kg
Condensation draining connections		16	16	16	16	16	16	16	16	16	Ø

Dimensions

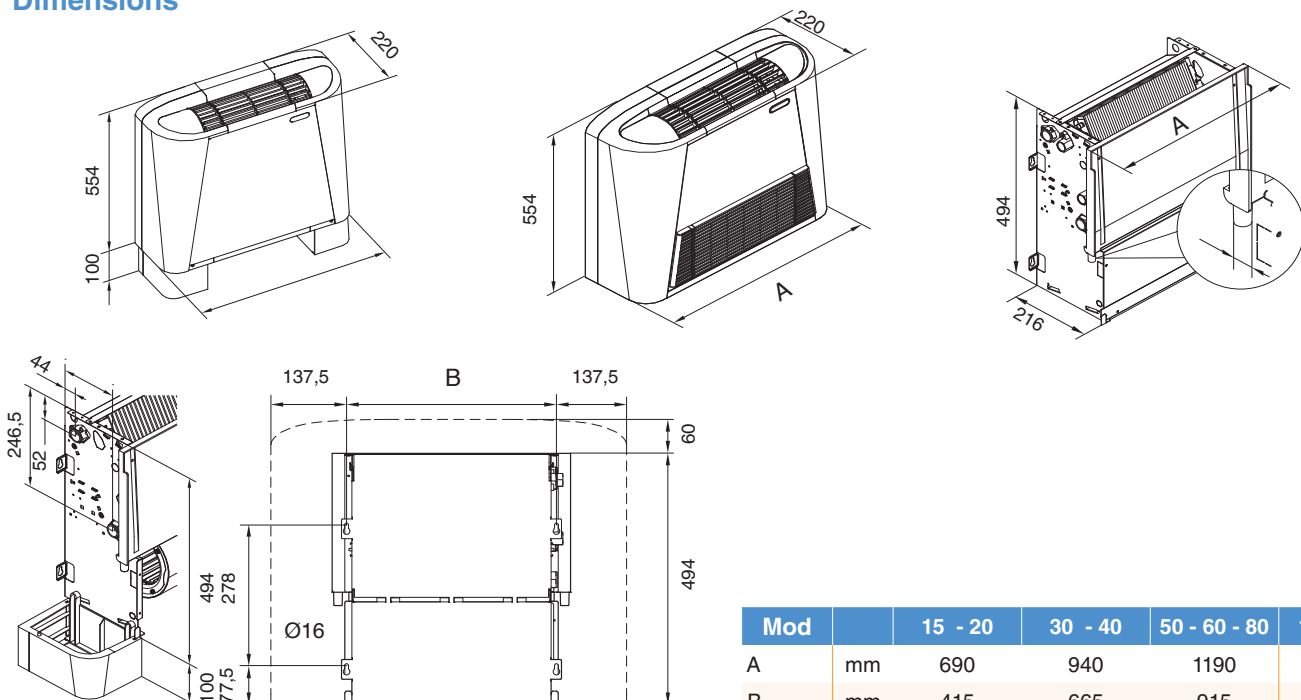

3 rows coil data

		15	20	30	40	50	60	80	100	120	
Total Cooling Capacity *	max. (E)	1100	1400	2100	2800	3400	4000	4900	6100	6850	W
	med.	980	1200	1850	2450	3010	3550	4350	5500	6100	W
	min	770	950	1450	1900	2390	2800	3600	4400	5000	W
Sensible Cooling Capacity *	max. (E)	850	1060	1620	2060	2420	2900	3800	4630	5300	W
	med.	735	910	1400	1780	2245	2550	3350	4045	4630	W
	min	560	705	1090	1390	1710	1985	2735	3155	3720	W
Dehumidifying max speed		350	490	670	1050	1150	1550	1600	2100	2200	g/h
Water flow rate * (E)		189	241	361	482	585	688	843	1049	1178	l/h
Water pressure drop (E)		4.4	6.9	14.6	23	14	18	19.1	9.9	12.5	Kpa
Heating Capacity **	max. (E)	2800	3650	5500	6500	7800	9400	12500	14900	15800	W
	med.	2400	3150	4550	5450	6600	7900	10800	12500	13270	W
	min	1800	2250	3400	4000	4930	5800	8300	9600	10000	W
Water flow rate **		241	314	473	559	671	808	1075	1281	1359	l/h
Water pressure drop **		5.1	8.6	17.6	24.2	14	18.1	17.7	10.8	12.1	Kpa
Heating Capacity *** (E)		1700	2050	3200	3850	4300	5100	7200	8080	9300	W
Water pressure drop *** (E)		3.6	5.3	9.6	15.2	13	14.6	15	8	10.1	Kpa
Heating capacity of supplementary coil	max. (E)	1250	1650	2550	3150	3690	4100	5050	6200	6950	W
	med.	1070	1420	2110	2640	3150	3440	4360	5200	6190	W
	min	860	1130	1750	2150	2320	2820	3480	4250	4800	W
Water flow rate		108	142	219	271	317	353	434	533	598	l/h
Water pressure drop		1.8	3	8.7	13.2	4	4.1	6.88	12.8	16.1	Kpa
N° fan		1	1	1	1	2	2	2	2	2	N°
Max power input motor (E)		30	38	33	60	40	70	120	120	160	W
Sound power level (E)	max.	43	47	50	54	51	55	62	61	64	dB(A)
	med.	39	42	43	48	44	49	57	57	59	dB(A)
	min	32	35	36	41	36	38	48	49	51	dB(A)
Sound pressure level	max.	34	38	41	45	42	46	53	52	55	dB(A)
	med.	30	33	34	39	35	40	48	48	50	dB(A)
	min	23	26	27	32	27	29	39	40	42	dB(A)
Water connection 3R	F	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	Ø
Water connection 1R	F	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	Ø
Water content 3R coil		0.82	0.82	1.26	1.26	1.88	1.88	1.88	2.42	2.42	l
Water content 1R coil		0.22	0.22	0.36	0.36	0.5	0.5	0.5	0.64	0.64	l

NOTES:

* Room Air T=27°C D.B. / 19°C W.B. , IN/OUT water 7°/12°C, nominal air flow-rate; For medium and minimum fan speed, water delivery as in maximum speed.

** Room Air T=20°C D.B. , IN/OUT water 70°/60°C, nominal air flow-rate; for medium and minimum fan speed, water delivery as in maximum speed.

*** Room Air T=20°C D.B. , inlet water 50°C, water delivery as in cooling; Values referred to nominal air flow-rate.

SWL : Sound power levels, referred to 1x10-12 W in dB(A), measured in accordance with Standard ISO 9614 and certified according to the Eurovent certification programme.

Eurovent certification (E) only refers to the Total Sound Power in dB(A) which is therefore the only binding acoustic data.

SPL : sound pressure in a 100 m3 place with reverberation time of 0.5 seconds.

(E) Declared data according to the certification programme LCP EUROVENT

4 rows coil data

		15-4	20-4	30-4	40-4	50-4	60-4	80-4	100-4	120-4	
Total Cooling Capacity *	max.	1400	1760	2790	3580	4050	4890	6450	7450	8200	W
	med.	1220	1460	2290	2940	3510	4020	5680	6620	7160	W
	min	900	1090	1700	2200	2500	2980	4000	5020	5250	W
Sensible Cooling Capacity *	max.	1050	1305	2060	2580	2950	3540	4950	5580	6210	W
	med.	890	1050	1640	2070	2510	2900	4200	4850	5330	W
	min	620	770	1200	1560	1770	2130	2910	3600	3820	W
Dehumidifying max speed		500	650	1050	1450	1580	1930	2330	2650	2850	g/h
Water flow rate *		240.8	302.72	479.88	615.76	696.6	841.08	1109.4	1281.4	1410.4	l/h
Water pressure drop		6	9	9	14	14	21	36	19	23	Kpa
Heating Capacity **	max.	3050	3950	5880	6950	8350	10100	13200	15800	16900	W
	med.	2580	3300	4730	5750	7260	8270	11300	13400	14310	W
	min	1900	2400	3600	4430	5460	6080	8450	10250	10500	W
Water flow rate **		262.3	339.7	505.68	597.7	718.1	868.6	1135.2	1358.8	1453.4	l/h
Water pressure drop **		5	8	7	10	11	16	27	15	18	Kpa
Heating Capacity ***		1850	2380	3460	4250	5000	5800	8100	9300	10500	W
Water pressure drop ***		5	8	8	13	12	18	32	16	20	Kpa
N° fans		1	1	1	2	2	2	2	2	2	N°
Max power input motor		35	38	55	76	75	85	144	163	200	W
Sound power level	max.	45	48	52	54	53	55	61	63	65	dB(A)
	med.	39	42	45	47	46	50	58	59	60	dB(A)
	min	32	35	39	41	37	39	48	51	52	dB(A)
Sound pressure level	max.	36	39	43	45	44	46	52	54	56	dB(A)
	med.	30	33	36	38	37	41	49	50	51	dB(A)
	min	23	26	30	32	28	30	39	42	43	dB(A)
Water connection 4R	F	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	"
Water content 4R coil		1.09	1.09	1.68	1.68	2.51	2.51	2.51	3.23	3.23	l

NOTES:

* Room Air T=27°C D.B. / 19°C W.B. , IN/OUT water 7°/12°C, nominal air flow-rate; For medium and minimum fan speed, water delivery as in maximum speed.

** Room Air T=20°C D.B. , IN/OUT water 70°/60°C, nominal air flow-rate; for medium and minimum fan speed, water delivery as in maximum speed.

*** Room Air T=20°C D.B. , inlet water 50°C, water delivery as in cooling; Values referred to nominal air flow-rate.

SWL : Sound power levels, referred to 1x10-12 W in dB(A), measured in accordance with Standard ISO 9614 and certified according to the Eurovent certification programme.

Eurovent certification (E) only refers to the Total Sound Power in dB(A) which is therefore the only binding acoustic data.

SPL : sound pressure in a 100 m3 place with reverberation time of 0.5 seconds.

> FCS-C

FAN COIL CASSETTE TYPE



Units Series

Unit type

- 2T 2 pipes systems
- 4T 4 pipes systems

Unit version

Standard control wire

Unit specifications

The cassette type fan coil unit is a terminal for the treatment of room air in the summer season (coil supplied with cold water) and in winter (coil supplied with hot water). These units are suitable for indoor installation, very compact and amply configurable to meet the requirements of highly qualified designers.

The centrifugal-axial fan allows the intake and outlet side of the 4 outputs contained to reduce the noise levels.

The careful design of the main components, refined styling and the versatility of the product make it suitable for any type of installation in the residential, commercial or industrial context.

Installation therefore only requires the electrical and hydraulic connections.

Construction characteristics of versions

- **SUPPORT STRUCTURE:** in galvanized steel sheet, insulated externally and internally to prevent heat loss and condensation.
- **HEAT EXCHANGE COIL:** made with copper pipes arranged in staggered rows and with corrugated aluminium finning, locked by mechanical expansion of the pipes.
- **FRONT GRILL:** in thermoplastic material, consisting of an attractively designed inlet grill complete with filter and four air-flow diverting fins. Intake occurs in the middle part of the grill, whereas delivery occurs through the manually-adjustable perimeter slots.
- **AIR FILTER:** situated inside the inlet grill and easily removed, it is made from regenerable materials, cleanable simply by washing.
- **CONDENSATE TRAY:** in plastic material, of considerable capacity complete with condensate drain pipe sized for elimination of the water even in critical conditions. A device that raises the condensate from the collection tray to the drain level is fitted standard.
- **FAN MOTOR:** no.1 directly coupled type, the unit is equipped with a three-speed motor with internal thermal protection and a mixed flow fan (axial-centrifugal) in plastic material. Single-phase power supply T=230V.
- **ELECTRIC BOX:** fitted outside the unit.

Installation options

The units have pre-cut side openings allowing the unit to be connected by means of a intake duct to a grill for external air change, or conveying treated air to an adjoining room.

Main accessories/Options

- Remote switch
- Remote standard thermostat
- Remote advanced thermostat
- Hot-start consent thermostat
- 4XUT system
- Main coil 3-way valve
- Supplementary coil 3-way valve

MODELS		04	08	10	12	16	21	04-4T	10-4T	21-4T	UM	
Version		2 pipes						4 pipes			-	
Cooling Capacity (*) (E)	min	1550	1900	2850	3400	3700	4050	1450	2600	3800	W	
	med	1800	2900	3500	4500	5500	6600	1650	3250	6800	W	
	max	2400	4000	4700	6300	7200	8700	2200	4100	8200	W	
Water flow rate (*)		0.11	0.19	0.22	0.30	0.34	0.42	0.11	0.20	0.39	l/s	
Water pressure drop (*) (E)		10.4	13.1	19.2	23.1	11.8	16.5	14.4	13.5	32.7	KPa	
Heating Capacity (**) (E)	min	2200	2500	3700	4500	4600	5200	-	-	-	W	
	med	2500	4000	4600	6000	7400	9300	-	-	-	W	
	max	3200	5000	6200	8110	10000	11600	-	-	-	W	
Water flow rate (**)		0.11	0.19	0.22	0.30	0.34	0.42	-	-	-	l/s	
Water pressure drop (**) (E)		10.3	13.8	16.2	18	10.6	14.6	-	-	-	KPa	
Heating Capacity (***) (E)	min	-	-	-	-	-	-	1240	5000	7300	W	
	med	-	-	-	-	-	-	1440	5800	11500	W	
	max	-	-	-	-	-	-	1900	6800	14500	W	
Water flow rate (***)		-	-	-	-	-	-	0.05	0.16	0.35	l/s	
Water pressure drop (***) (E)		-	-	-	-	-	-	30.7	29.5	19.9	KPa	
Supply		230-1-50										V-F-Hz
Air flow rate	min	360	320	485	530	500	600	360	485	600	m ³ /h	
	med	450	505	625	720	825	1080	450	625	1080	m ³ /h	
	max	660	735	900	980	1160	1450	660	900	1450	m ³ /h	
Sound power level (SWL) (E)	min	32	32	42	34	37	40	32	42	40	dB(A)	
	med	37	44	48	40	46	52	37	48	52	dB(A)	
	max	47	52	57	47	53	59	47	57	59	dB(A)	
Sound pressure level (SPL)	min	23	23	33	25	28	31	23	33	31	dB(A)	
	med	28	35	39	31	37	43	28	39	43	dB(A)	
	max	35	43	48	38	44	50	38	48	50	dB(A)	
Motor input power (E)	min	25	16	35	27	33	43	25	35	43	W	
	med	35	32	55	39	59	90	35	55	90	W	
	max	58	54	94	63	85	123	58	94	123	W	
N° fan		1										n°
grille weight		2.5	2.5	2.5	5.0	5.0	5.0	2.5	2.5	5.0	Kg	
Unit weight		15.0	16.5	16.5	37.0	39.6	39.6	16.5	19.0	39.6	Kg	
Water connection main coil		3/4	3/4	3/4	1	1	1	3/4	3/4	1	" F	
Water connection only heating coil		-	-	-	-	-	-	1/2	1/2	3/4	" F	
Condensation draining connections		16	16	16	16	16	16	16	16	16	mm	

NOTES:

* Room Air T=27°C D.B. / 19°C W.B. , IN/OUT water 7°/12°C, nominal air flow-rate; For medium and minimum fan speed, water delivery as in maximum speed.

** Room Air T=20°C D.B. , inlet water 50°C, water delivery as in cooling.

*** Room Air T=20°C D.B. , IN/OUT water 70°/60°C, nominal air flow-rate; for medium and minimum fan speed, water delivery as in maximum speed.


SWL : Sound power levels, referred to 1x10-12 W in dB(A), measured in accordance with Standard ISO 9614 and certified according to the Eurovent certification programme. Eurovent certification (E) only refers to the Total Sound Power in dB(A) which is therefore the only binding acoustic data.

SPL : sound pressure in a 100 m3 place with reverberation time of 0.5 seconds.


(E) Declared data according to the certification programme LCP EUROVENT

Overall dimensions

Mod. 04-08-10

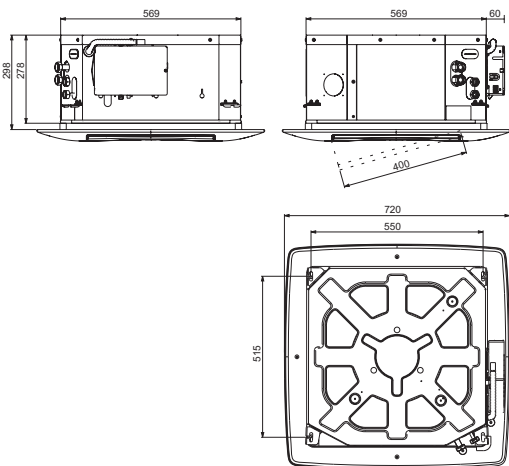

Mod. 12-16-21

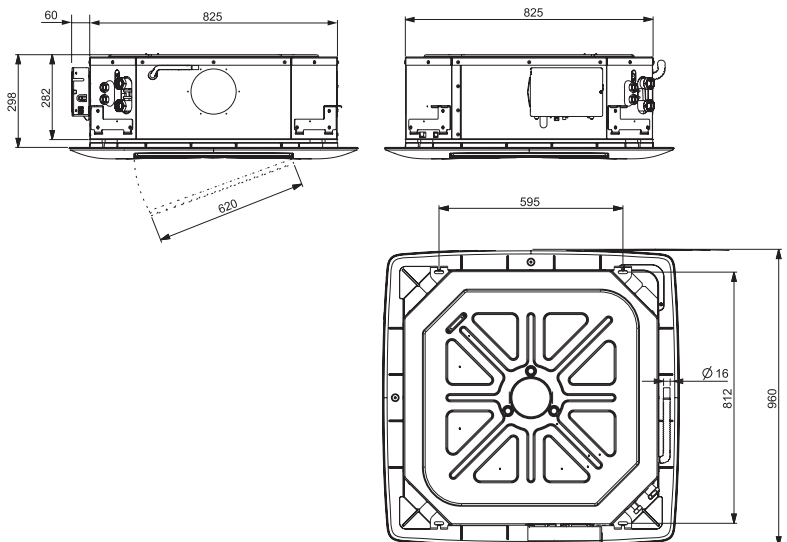



TOP FAN remote control specifications

Remote control with LCD display complete with support bracket for wall fixing. enabling the following functions:

Unit ON/OFF

Operation mode selection

- Auto, Heat, Cool, Fan (only if the valve accessory is present)

Ventilation speed

- Max, Med, Min, Auto

Set Point

Timer

The remote control display shows:

Operation mode

Selected fan speed

Set point value

Timer activation

Time setting



Exposed TOP FAN fan coil receiver

Positioned on the front panel of the unit, it is complete with Timer LED (yellow), On LED (green) and emergency ON/OFF button and reception zone.

The system is completed with the board inside the unit. The system is supplied already factory-tested and installed.



Ceiling concealed TOP FAN wall receiver

The receiver is supplied in case of ceiling concealed units and is positioned exposed on the false ceiling. It is complete with Timer LED (yellow), On LED (green) and emergency ON/OFF button and reception zone.

It comes with a multicore cable (max. length 0.8 m) for quick connection and electronic board for installing on the unit. The system is factory-tested, whereas positioning the receiver is up to the installer.



FCS remote control specifications

Remote control with LCD display complete with support bracket for wall fixing. enabling the following functions:

Unit ON/OFF

Operation mode selection

- Auto, Heat, Cool, Fan (only if valve accessory is present)

Ventilation speed

- Max, Med, Min, Auto

Set-Point

Air Sweep for air flow adjustment

Timer

The remote control display shows:

Operation mode

Selected fan speed

Set point value

Timer activation

Time setting

Signal sent symbol

Fin position





> VTP

Wall type fan coil



UNIT DESCRIPTION

The wall type fan coil unit is a terminal for the treatment of room air in the summer season (coil supplied with cold water) and in winter (coil supplied with hot water).

These units are suitable for indoor installation, very compact and amply configurable to meet the requirements of highly qualified designers.

The careful design of the main components, refined styling and the versatility of the product make it suitable for any type of installation in the residential, commercial or industrial context. Available in 4 constructional sizes with **1,24 to 3,74 kW** refrigerating power rating and **1,58 to 4,77 kW** heating capacity, they are suitable for installation on walls, while their small size provides them with a pleasant appearance.

The cabinet is made of **ABS** material and provides high mechanical characteristics and resistance to ageing.

It also acts as the bearing structure of the unit.

The ventilating unit consists of a tangential fan with an **DC** brushless motor with very low power consumption. A display on the front panel shows the operating status of the units and the setting temperature.

The units are equipped with a pair of flexible hydraulic pipes to facilitate

EC motor



connections to the system.

All the units are equipped with a three-way on-off valve. The valve is installed inside the unit and can be easily accessed via the front panel: use of the three-way valve prevents the unit from cooling too much when the fan is at a standstill and also prevents the unpleasant formation of condensation on the casing

3-way valve



of the machine.

The units can be connect in **Master-Slave** mode.

Master-Slave system



CONTROLS

Two different control are available. One of them must be choose. In case of Master Slave function it will be necessary select at least one control for all the group or zone.

Infrared remote control Rem-I

It set all the function of the units via infrared. It's complete with LCD display, for quick setting of parameters necessary for correct use of the unit.

It's also provided of a wall fixing holder. It permit to control the units from max 7 m distance.



Wire wall control Rem-I

It set all the function of the units via infrared and it can locally measure the ambient temperature. If used in a Master Slave system it can control singularly any units of the system. It can be use as infrared receiver. It's equipped with a 7m connecting wire.



TECHNICAL DATA

MODEL		15	25	35	45		
Total cooling capacity ^{(1) (E)}	max.	1240	2070	3030	3740	W	
	med.	1040	1640	2480	3280	W	
	min.	841	1370	1870	2670	W	
Sensible cooling capacity ^{(1) (E)}	max.	915	1520	2220	2740	W	
	med.	766	1200	1810	2400	W	
	min.	616	995	1350	1940	W	
Dehumidification at maximum speed ⁽¹⁾		430	700	1050	1330	g/h	
Water flow rate ⁽¹⁾		213	356	521	643	l/h	
Water pressure drop on water side ^(E)		22,8	28,8	38,5	50	kPa	
Heating capacity ^{(2) (E)}	max.	1580	2640	3850	4770	W	
	med.	1320	2080	3140	4170	W	
	min.	1060	1720	2340	3370	W	
Water flow rate ⁽²⁾		213	356	521	643	l/h	
Water pressure drop on water side ^{(2) (E)}		18,4	22,4	35,0	45,0	kPa	
Heating capacity ^{(3) (E)}	max.	2606	4355	6351	7868	W	
	med.	2175	3440	5190	6860	W	
	min.	1740	2845	3880	5550	W	
Water flow rate ⁽³⁾		224	375	546	677	l/h	
Water pressure drop on water side ^{(3) (E)}		18,1	22,0	34,0	44,1	kPa	
Power supply		230-1-50				V-F-Hz	
Air flow rate	max.	370	500	645	880	m ³ /h	
	med.	290	370	445	740	m ³ /h	
	min.	220	290	370	570	m ³ /h	
Sound power ^(E)	max.	40	48	54	58	dB(A)	
	med.	35	40	43	53	dB(A)	
	min.	33	35	40	46	dB(A)	
Sound pressure ⁽⁴⁾	max.	30	38	44	48	dB(A)	
	med.	25	30	33	43	dB(A)	
	min.	23	25	30	36	dB(A)	
Absorption ^(E)	max.	13	18	22	30	W	
	med.	10	13	15	20	W	
	min.	6	10	10	13	W	
Apparent power		max.	22	41	52	94	W
Motor absorption		max.	0,1	0,19	0,24	0,44	A
Coil water content			0,26	0,38	0,72	0,93	l
Plumbing connections		Ø	1/2" F	1/2" F	1/2" F	1/2" F	"
Condensate drain connection		Ø	16	16	16	16	mm
Valve	Type	3 vie ON-OFF				-	
	Connection	1/2"	1/2"	1/2"	1/2"	"	

⁽¹⁾ Water 7°C IN- 12°C OUT - Air 27°C DB 19°C WB

⁽²⁾ Water 50°C IN - Same flow rate cool mode - Air 20°C DB


⁽³⁾ Water 70°C IN - OUT 60°C - Air 20°C DB

⁽⁴⁾ Sound pressure level at 1 metre from the unit

^(E) Eurovent certified data

Pressure losses on water side include losses on the valve.

OVERALL DIMENSIONS

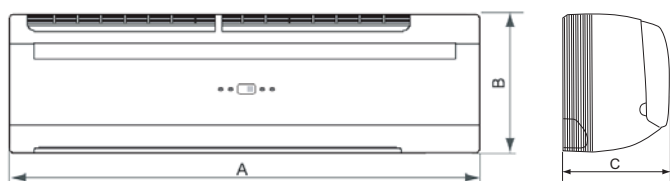

MOD.	15	25	35	45	UM
A	876				mm
B	300				mm
C	228				mm
Weigh	11	12	13	14	kg

> MERCURY SP

DUCTED FAN COIL



Units Series

Type unit
MERCURY SP horizontal unit

Unit specifications

Ducted fan coil complying with Machine Directive 89/392 EEC and amendments 91/368 EEC, 93/44 EEC, 93/68 EEC, Low-Voltage Directives 72/23 EEC and Electromagnetic Compatibility Directives EMC 89/36 EEC.

The ducted fan coil unit is a terminal for the treatment of room air in the summer season (coil supplied with cold water) and in winter (coil supplied with hot water).

These units are suitable for indoor installation, very compact and amply configurable to meet the requirements of highly qualified designers.

The careful design of the main components, refined styling and the versatility of the product make it suitable for any type of installation in the residential, commercial or industrial context.

Installation therefore only requires the electrical and hydraulic connections.


Construction characteristics

- **SUPPORT STRUCTURE:** in aluzink sheet, lined with a suitable thickness of polyethylene and polyester to prevent heat loss, condensation and for soundproofing.
- **AIR FILTER:** easily removed from bottom or side, it can be cleaned simply by washing with water.
- **HEAT EXCHANGE COIL:** made with copper pipes arranged in staggered rows to increase heat exchange efficiency along with aluminium fins, locked by the expansion of the pipes during production. Complete with water inlet/outlet manifolds.
- **CONDENSATE TRAY:** made in galvanised sheet steel, complete with section for connection to the discharge line.
- **FAN MOTOR:** direct drive type, the unit is equipped with a three-speed fan motor assembly with internal thermal protection and a startup capacitor always on, with a blade that is statically and dynamically balanced to minimise noise and vibration.
- **ELECTRICAL CONNECTIONS:** The unit comes complete with protected electrical terminal block for making the connection to the various available adjustment controls.

Main accessories/Options

- Remote switch
- Remote standard thermostat
- Remote advanced thermostat
- Hot-start consent thermostat
- 4XUT system
- Relay Kit
- 8SF Zone Master control
- 8SF main power module
- 8SF local unit
- Expansion for systems with 4 pipes
- Expansion for electrical resistance management
- KNX expansion
- Supplementary tray
- Main coil 3-way valve
- Post heating section
- Post-heating 3-way valve
- Outlet plenum
- Inlet grill
- Inlet plenum
- Outlet grill
- Standard air filter
- Air filter Class G2

NB: In case of electrical connection of the unit to Ferrolti thermostats, the unit must be fitted with the relay kit accessory (KR).

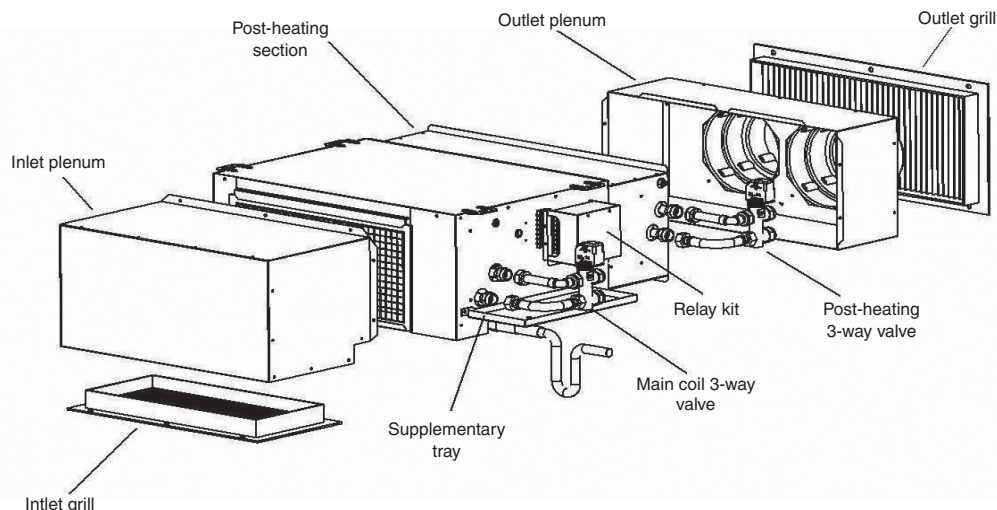

		05	07	11	13	17	19	21	23		
Cooling Capacity *	Max.	5.042	7.909	9.111	10.326	13.327	16.375	20.943	23.118	W	
	Med.	4.882	7.423	8.667	9.393	11.847	12.839	20.472	22.502	W	
	Min.	4.478	6.208	7.171	8.302	10.163	9.369	19.355	21.063	W	
Water flow rate*		870	1.364	1.573	1.782	2.304	2.826	3.613	3.988	L/h	
Water pressure drop *		39	38	34	40	40	39	38	34	Kpa	
Heating Capacity **	Max.	5.598	8.158	9.379	10.598	13.571	17.222	22.037	23.950	W	
	Med.	5.330	7.643	8.766	9.403	11.769	12.440	21.376	23.095	W	
	Min.	4.981	6.330	6.855	7.984	9.634	8.508	19.784	21.178	W	
Water flow rate **		963	1.404	1.614	1.823	2.335	2.963	3.791	4.120	L/h	
Water pressure drop **		36	34	28	36	35	35	34	28	Kpa	
Heating Capacity ***	Max.	11.460	16.444	18.906	21.357	27.348	34.741	44.455	48.277	W	
	Med.	10.843	15.399	17.660	18.931	23.693	25.033	43.111	46.542	W	
	Min.	10.201	12.736	13.785	16.057	19.367	17.082	39.876	42.652	W	
Water flow rate ***		986	1.414	1.626	1.837	2.352	2.988	3.823	4.152	L/h	
Water pressure drop ***		33	28	26	33	32	33	29	26	Kpa	
N° row coil		3	4	4	4	4	4	4	4	N	
Supply		230/1/50									V-F-Hz
Air flow rate	Max.	840	1.200	1.260	1.430	1.700	2.400	3.050	3270	m3/h	
	Med.	780	1.016	1.153	1.233	1.436	1.606	2.932	3115	m3/h	
	Min.	724	807	868	1.015	1.130	1.039	2.667	2790	m3/h	
External static pressure	Max.	90	90	90	90	90	90	90	90	Pa	
N° fans		1					2				n°
n° fan speed							3				n°
Power input motor		230	240	290	332	348	652	683	698	W	
Max input current		1.8	1.8	1.8	2.1	2.1	3.7	4.8	4.8	A	
SPL - Sound pressure level	Max.	46	49	50	52	53	55	57	58	dB(A)	
	Med.	42	45	46	47	48	50	52	53	dB(A)	
	Min.	36	38	39	41	41	43	45	45	dB(A)	
Connexions de l'eau		3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	"	
Water content		1.11	2.63	3.11	3.34	4.45	4.67	6	7.51	l	
Weight		24	44	47	52	56	66	73	81	Kg	


NOTES:

* Room Air T=27°C D.B. / 19°C W.B. , IN/OUT water 7°/12°C, nominal air flow-rate; For medium and minimum fan speed, water delivery as in maximum speed.

** Room Air T=20°C D.B. , IN/OUT water 70°/60°C, nominal air flow-rate; for medium and minimum fan speed, water delivery as in maximum speed.

** lace with reverberation time of 0.5 seconds.

Dimensions

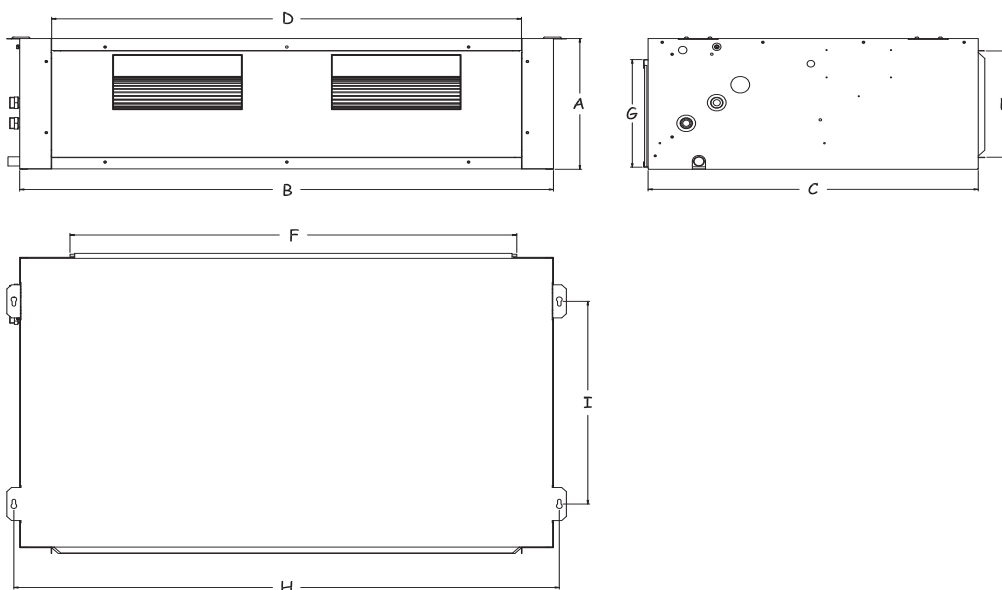

Mod		A	B	C	D	E	F	G	H	I
05	mm	290	640	475	550	235	475	260	665	320
07 - 11	mm	290	1005	650	915	235	950	260	1030	430
13 - 17	mm	315	1135	700	1000	260	950	260	1160	480
19 - 21	mm	360	1330	765	1200	300	1300	320	1355	540
23	mm	360	1635	765	1200	300	1300	320	1660	540

> FTE

AIR HANDLING UNITS

The **FTE series is Eurovent certified** and is built with a modular system providing for 29 sizes for a wide range of capacities with the possibility of special set-up upon request.

■ **STRUCTURE:** made with strong framework in extruded anodised aluminium sections, joined with angle joints in die-cast aluminium panels with double shell made by galvanised steel sheet, prepainted, stainless ASI 304 or peraluman.

The panels are available in 2 different thickness:

- 48 mm with polyurethane foam
- 48 mm with high density rock wool
- 63 mm only with high density rock wool, coupled to special extruded anodised aluminium sections with rounded edges complete with thermal break to minimize heat loss and air leakage. In this configuration, panels and profiles are coplanar thus making the surface of the central completely smooth, thus facilitating the operations of cleaning and sanitizing.

This solution is particularly suitable for applications in hospitals, food processing, pharmaceutical, etc.

The panels are equipped with self-adhesive type seals. The inspection panels are fitted on hinges and provided with double closing handles (internal and external).

The fixed panels 48 mm thickness are fasten to the frame with galvanised steel or stainless steel screws.

The fixed panels 63 mm thickness are fasten to the frame with galvanised steel or stainless steel screws that are completely surrounded by the thermal insulation so avoiding any possible thermal bridge.



Ferrol participates to the Eurovent certification program referred to the Air Handling Units (AHU). The Eurovent certification program is based on the requirements defined by the EN 1886 standard that ranks the following technical features of air-handling units:

- Mechanical strength of the casing
- Air leakage through the casing
- Air leakage around the filter frame
- Thermal transmittance of the casing
- Thermal bridges of the casing
- Acoustic insulation of the casing



The verification of these requirements is based on tests conducted by TUV laboratory accredited by Eurovent.

> FTP

AIR HANDLING UNITS

The **FTP series** is built with a modular system providing for 29 sizes for a wide range of capacities with the possibility of special set-up upon request.

■ **STRUCTURE:** made with strong framework in extruded anodised aluminium sections, joined with angle joints in die-cast aluminium or nylon panels with double shell and insulated with high density rock wool or polyurethane foam with thickness 23, 48 or 63 mm, with normal profiles or with thermal break. The panels can be made by:

- galvanised steel sheet
- prepainted steel sheet
- peraluman sheet
- AISI 304 stainless steel sheet

The panels are fixed to the frame with galvanised steel or stainless steel screws and are equipped with self-adhesive type seals. The inspection panels are fitted on hinges and provided with double closing handles (internal and external).



> General features

■ **BASE:** With a continuous beam in heavy galvanised steel sheet, press bent with sections with a high structural rigidity which ensure safe transport and handling on site.



■ **FANS:** to be selected upon the specific application:

- Dual-intake centrifugal type with forward or backward blades
- Dual-intake centrifugal type with airfoil backward blades
- Plug fan with speed control via 0-10V signal. They can be supplied with standard AC motor and external inverter control or with brushless EC motor ("inverter" built-in motor)



■ **MOTORS:** brushless type (for EC plug fan) or three-phase asynchronous squirrel-cage rotor windings and class F. All motors have efficiency class IE2 (IE3 on request) according to the international standard IEC 60034-30 and the ErP Directive 2009/125/EC (formerly EuP).

■ **HEAT EXCHANGER COILS,** removable type, can be chosen to work with water, brine solutions (eg. Glycol), steam or direct expansion. In the standard version are made with aluminum fins and copper pipes mechanically expanded. On request can be supplied in special versions (steel pipes or stainless steel, pre-painted aluminium fins, copper fins, etc..).



■ **ELECTRIC COILS:** The electric coils have armored-type heaters with one or two stages, complete with electrical panel and safety thermostat.

■ **AIR FILTERS** with high surface area and low pressure drop, can be selected:

- Roll filters
- Rigid or soft pockets filters
- Corrugated filter cells
- Activated carbon filters



■ **HEAT RECOVERY** can be selected:

- Static type cross-flow plates made of aluminum (or steel) sealed so as to ensure the total absence of contact between the exhaust air and the fresh air entered.
- Rotary with rotating hygroscopic drum; on demand can be supplied complete with a device for controlling the speed of rotation.



■ **DAMPERS:** constructed of galvanized sheet metal frame and paneled extruded aluminum fins, complete with gasket for maximum sealing.

■ **HUMIDIFICATION** to be selected according to the specific application:

- **STEAM** through the installation of a steam generator or through distributors in case of steam network.
- by **NOZZLES** through self-cleaning spray nozzles, mounted on one or two trains.
- **PACK** by a honeycomb packing cellulose impregnated with phenolic resins, complete with metal frame containing and water distributor.


■ **COLLECTION TRAYS:** These can be in galvanised steel or AISI 304 stainless steel sheet, provided with drain manifold.

■ **SILENCERS** available in different lengths, are made with insulating baffles, constructed with multiple layers of rock wool content from a microperforated sheet metal; external surfaces of the septa in direct contact with the treated air are coated with a plastic film to prevent flaking.

Software Selection

Ferrol cta is a selection powerful and versatile software that allows you to select the air handling unit best suited to your specific needs quickly and completely.

The output generated by the SW is offering a comprehensive economic, including technical drawings and characteristics of the selected components.

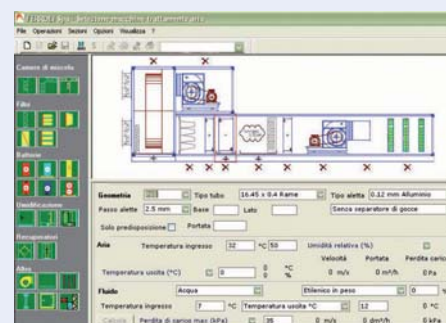

> RFA

PACKAGED AIR CONDITIONERS AND HEAT PUMPS ROOF TOP FOR OUTDOOR INSTALLATION



Available range

Unit type

PC Heat pump
(reversible on the refrigerant side)

Constructive configurations

VB Base version
V1 1 damper version
V2 2 dampers version
V2 3 dampers version

Acoustic setting up

AB Base setting up
AS Low noise setting up

Unit description

This series of packaged air conditioners and heat pumps (roof top) satisfies the cooling and heating requirements of medium and large buildings (commercial centres, supermarkets, cinemas, outlets, offices, canteens, restaurants ...)

All the units are suitable for outdoor installation and can be applied to plants realized with various type of air ducts.

Each model is available in various constructive configurations and can be equipped with a large range of accessories in order to fit the different installation requirements.

The region in contact with the treated air, easily accessible, is realized with perfectly washable metal surfaces, externally insulated in order to minimize the thermal losses and to avoid condensate generation both on the internal part and the external part of the structure.

The refrigerant circuit, contained in a compartment protected by the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports. Each compressor is placed on an independent refrigerant circuit in order to keep a constant ratio between the sensible cooling power and total cooling power also at partial loads and to guarantee a better treatment of the air besides a greater reliability.

Each refrigerant circuit is equipped with thermostatic expansion valves, reverse cycle valve, axial fans with safety protection grilles, finned coils made of copper pipes and aluminium louvered fins and high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

All the units are supplied with an outdoor temperature sensor, already installed on the unit.

All the units are provided with a phase presence and correct sequence controller device.

All the units are accurately built and individually tested in the factory. Only electric, aeraulic and hydraulic connections are required for installation.

Options

Air flow position

- upwards / frontal
- downwards

Internal fan

- standard
- upsized
- reduced

Heating integration

- hot water coil
(2 or 3 rows with pipes or 3 way valve)
- electrical heater coil
(standard or upsized)
- condensing gas heating module
(standard or upsized)

Air flow silencers

External fans control

- on-off control
- modulating control (condensation / evaporation control)

Enthalpic free cooling

Air quality control (CO₂)

Special filters

- rigid pockets filters (F6 - F7 - F8 - F9)
- rigid pocket filters with active carbons

Filters differential pressure switch

Droplets separator

Accessories

Spring vibration dampers

External coils protection grilles

High and low pressure gauges

Remote thermostat

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Roof curb

NOMINAL performances

PC	Base setting up (AB)	35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
	Low noise setting up (AS)										
A35A27	Total cooling capacity	35,5	46,3	57,7	71,0	92,3	113	142	184	226	kW
	RST *	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	-
	Power input	10,9	14,0	17,7	22,5	28,8	36,6	46,6	59,5	73,7	kW
	EER	3,26	3,31	3,26	3,16	3,20	3,09	3,05	3,09	3,07	-
	Air flow rate plant side	6200	8100	10000	11000	14500	17000	22500	29000	35000	m³/h
	Available static head plant side	200	200	200	200	200	200	200	200	200	Pa
A7A20	Heating capacity	36,7	47,8	59,5	73,9	95,9	118	148	192	236	kW
	Power input	11,2	14,4	18,2	23,0	29,5	37,5	47,7	60,9	75,5	kW
	COP	3,28	3,32	3,27	3,21	3,25	3,15	3,10	3,15	3,13	-
	Air flow rate plant side	6200	8100	10000	11000	14500	17000	22500	29000	35000	m³/h
	Available static head plant side	200	200	200	200	200	200	200	200	200	Pa

Data declared according to EN 14511. The values are referred to units without options and accessories operating with 100% return air.

* RST = ratio between sensible cooling capacity and total cooling capacity.

A35A27 = source : air in 35°C d.b. / plant : air in 27°C d.b. 19°C w.b.

A7A20 = source : air in 7°C d.b. 6°C w.b. / plant : air in 20°C d.b.

Acoustic performances

Base setting up (AB)	35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
Sound power level	84	85	85	87	87	88	90	92	93	dB(A)
Sound pressure level at 1 metre	67	67	68	69	69	70	71	73	74	dB(A)
Sound pressure level at 5 metres	58	58	59	60	61	61	63	65	66	dB(A)
Sound pressure level at 10 metres	53	53	54	55	56	56	58	60	61	dB(A)
Low noise setting up (AS)	35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
Sound power level	81	82	82	84	84	85	87	89	90	dB(A)
Sound pressure level at 1 metre	64	64	65	66	66	67	68	70	71	dB(A)
Sound pressure level at 5 metres	55	55	56	58	58	59	60	62	63	dB(A)
Sound pressure level at 10 metres	50	50	51	53	53	54	55	57	58	dB(A)

Performances referred to units with VB constructive configuration (base version) operating in cooling mode at NOMINAL conditions A35A27 with STANDARD air flow rate and available static head.

Unit placed in free field on reflecting surface (directional factor equal to 2) with air inlet and outlet connections ducted for 2 metres.

The sound power level is measured according to ISO 3744 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

OPERATING LIMITS	Unit type	Cooling		Heating		°C
		min	max	min	max	
Outdoor air inlet temperature	PC	10	50	-10	22	°C
Return air inlet temperature	PC	15	37	5	22	°C

TECHNICAL DATA	35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
Power supply	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	400 - 3N - 50	V-ph-Hz
Compressor type	scroll	scroll	scroll	scroll	scroll	scroll	scroll	scroll	scroll	-
N° compressors / N° refrigerant circuits	1 / 1	1 / 1	1 / 1	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	n°
Plant side heat exchanger type	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	-
Source side heat exchanger type	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	finned coil	-
External fans type	axial	axial	axial	axial	axial	axial	axial	axial	axial	-
N° external fans	2	2	2	4	4	4	4	4	4	n°
Internal fans type	centrifugal	centrifugal	centrifugal	centrifugal	centrifugal	centrifugal	centrifugal	centrifugal	centrifugal	-
N° internal fans	2	2	2	2	2	2	2	2	2	n°

HEATING INTEGRATION		35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
Electrical heater coil	standard	9,0	9,0	9,0	18,0	18,0	18,0	36,0	36,0	36,0	kW
	upsized	18,0	18,0	18,0	31,5	31,5	31,5	63,0	63,0	63,0	kW
Condensing gas heating module	standard	44,8	44,8	44,8	93,4	93,4	93,4	186,8	186,8	186,8	kw
	upsized	54,0	54,0	54,0	145,0	145,0	145,0	290,0	290,0	290,0	kW


CONSTRUCTIVE CONFIGURATIONS

Each model can be supplied in different constructive configurations in order to satisfy the application requirements that can be necessary for the plants. The various versions, obtained adding to the base version some modules, are always supplied already assembled, wired and tested in the factory. All the versions can be arranged with standard air flow position (frontal for the models of frame 1 and 2 and upwards for the models of frame 3) or with downwards air flow position. The dotted components are accessories.

VB - Base version

It only allows to operate with all return air. It contains the standard filtering section and the air-refrigerant exchange coil that allows the heating, cooling and dehumidification processes to be performed.

It is possible to add a further heating section (hot water coil or electrical heater coil) and the droplets separator. Instead of such heating section it is possible to add a gas heating module, placed between the filtering section and the air-refrigerant exchange coil.

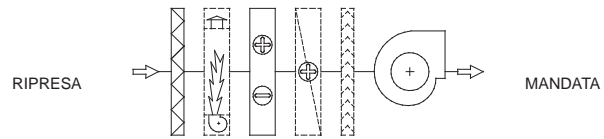


V1 - 1 damper version

It allows to operate with a percentage of outdoor fresh air, adjustable manually setting the damper placed on the adding module. The outdoor air inlet is equipped with a rain protection cap and a metal safety grille. The expulsion from the conditioned ambient of an air flow rate equal to the outdoor fresh air flow rate must be realized independently from the unit by means of overpressure openings or other extraction devices. In the adding module can be placed various type of special filters in order to complete the standard filtering section.

Also in this version it is possible to add a further heating section (hot water coil or electrical heater coil) and the droplets separator.

Instead of such heating section it is possible to add a gas heating module, placed between the filtering section and the air-refrigerant exchange coil. Downstream the internal fans, air flow silencers can be installed to reduce the noise transmitted to the conditioned ambients through the air ducts (only for the models of frame 1 and 2).

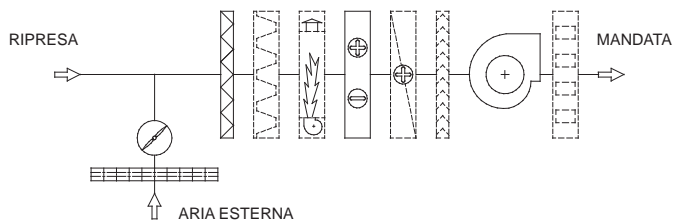

V2 - 2 dampers version

The presence of two motorized dampers managed by the controller of the unit allows to operate with a minimum percentage of outdoor fresh air (adjustable through the user interface) and to perform thermal free cooling.


The outdoor air inlet, equipped with a rain protection cap and a metal safety grille, is designed for 100% of the total air flow rate and allows to operate in free cooling with all outdoor air.

The expulsion from the conditioned ambient of an air flow rate equal to the outdoor fresh air flow rate must be realized independently from the unit by means of overpressure openings or other extraction devices.

In the adding module can be placed various type of special filters in order to complete the standard filtering section.

It is possible to add a further heating section (hot water coil or electrical heater coil) and the droplets separator. Instead of such heating section it is possible to add a gas heating module, placed between the filtering section and the air-refrigerant exchange coil.

It is also possible to perform enthalpic free cooling by means of the installation of the humidity sensors. Downstream the internal fans, air flow silencers can be installed to reduce the noise transmitted to the conditioned ambients through the air ducts (only for the models of frame 1 and 2).

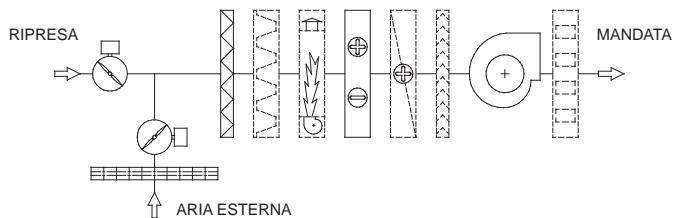

V3 - 3 dampers version

The presence of three motorized dampers managed by the controller of the unit allows to operate with a minimum percentage of outdoor fresh air (adjustable through the user interface), to perform thermal free cooling and to manage the air expulsion.


The outdoor air inlet, equipped with a rain protection cap and a metal safety grille, is designed for 100% of the total air flow rate and allows to operate in free cooling with all outdoor air.

The expulsion from the conditioned ambient of an air flow rate equal to the outdoor fresh air flow rate is realized through the return air fan and the expulsion damper placed inside the unit.

In the adding module can be placed various type of special filters in order to complete the standard filtering section.

Also in this version it is possible to add a further heating section (hot water coil or electrical heater coil) and the droplets separator. Instead of such heating section it is possible to add a gas heating module, placed between the filtering section and the air-refrigerant exchange coil. It is also possible to perform enthalpic free cooling by means of the installation of the humidity sensors.

Downstream the internal fans, air flow silencers can be installed to reduce the noise transmitted to the conditioned ambients through the air ducts (only for the models of frame 1 and 2).

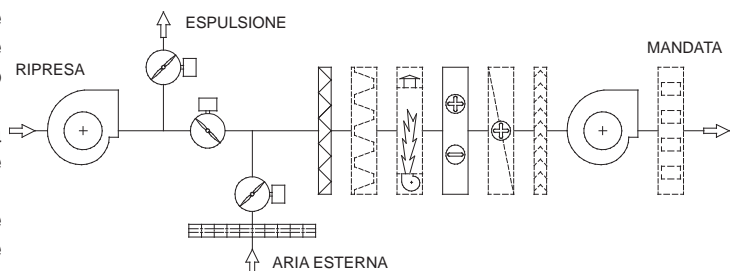

CONTROL SYSTEM

The unit is managed by a microprocessor controller to which, through a board placed inside the electrical panel, all the electrical loads and the control devices are connected. The user interface, accessible removing the protection panel of the electrical board, is realized by a display and two buttons that allow to view and, if necessary, modify all the operating parameters of the unit.

Are available, as accessories, a remote control, that reports all the functionalities of the user interface placed on the unit, or a remote thermostat.


The main functions available are :

- treated air temperature management (through set point adjustment)
- treated air humidity management (only with enthalpic free cooling option)
- treated air quality management (CO₂)
- thermal or enthalpic (option) free cooling
- external fan management by means of continuous rotational speed control (option)
- internal fan management
- return air fan management

- integrative heating sources management (electrical heater coil, hot water coil, gas heating module)
- defrost cycle management
- dampers management (outdoor air, return air and expulsion air)
- compressor and internal fan operating hours recording
- serial communication through Modbus protocol
- remote on-off
- remote cooling-heating
- active alarms visualization
- general alarm digital output



DIMENSIONS AND MINIMUM OPERATING AREA

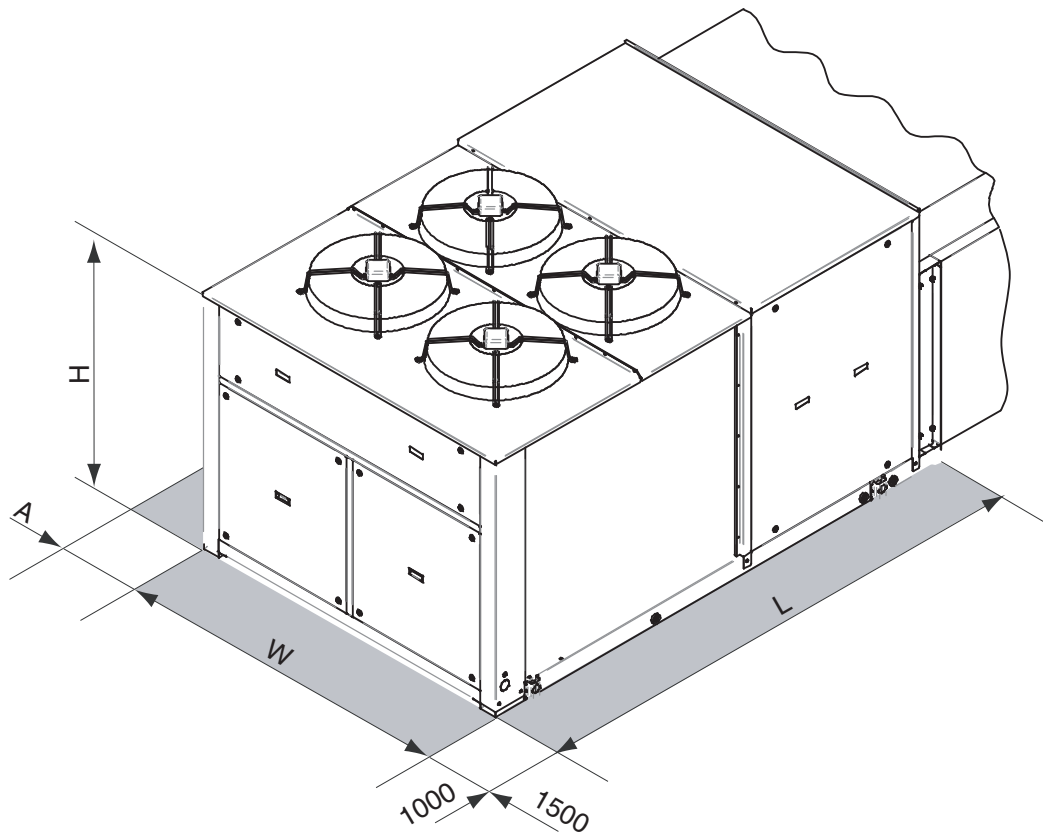

		35.1	45.1	55.1	70.2	90.2	110.2	140.2	180.2	220.2	
L	VB	2900	2900	2900	3100	3100	3100	3900	3900	3900	mm
	VB with gas heating module	3830	3830	3830	4300	4300	4300	5100	5100	5100	mm
	V1 e V2	4000	4000	4000	4200	4200	4200	5000	5000	5000	mm
	V1 e V2 with gas heating module	4930	4930	4930	5400	5400	5400	6200	6200	6200	mm
	V3	4800	4800	4800	5000	5000	5000	6600	6600	6600	mm
	V3 with gas heating module	5730	5730	5730	6200	6200	6200	7800	7800	7800	mm
W		1400	1400	1400	2000	2000	2000	2200	2200	2200	mm
H		1600	1600	1600	1600	1600	1600	2350	2350	2350	mm
A		1000	1000	1000	1500	1500	1500	1500	1500	1500	mm

> Main specification of heat recovery terminal units

UT REC / UT REC C

UT REC R

UT REC DP / UT REC DP F

RECOVERY EFFICIENCY IN WINTER MODE

RECOVERY EFFICIENCY IN SUMMER MODE

FERROLI offers a complete range of heat recovery terminal units, to meet all system requirements.

> UT REC

available in two versions:



UT REC with static heat recuperator in ALUMINIUM; enables recovery of the sensible heat otherwise lost.

UT REC C with PAPER PACK static heat recuperator: in special treated self-extinguishing stiff paper. The structure consists of a pair of sheets with an interposed corrugated third sheet separating these and creating a triangular air channel (drawing opposite). The paper sheets are permeable to steam, enabling recovery of the sensible as well as latent heat. In this way limited air side pressure losses are obtained, as well as a high exchange area and therefore higher recovery are achieved to values higher than 55-60%.

UT REC



UT REC C

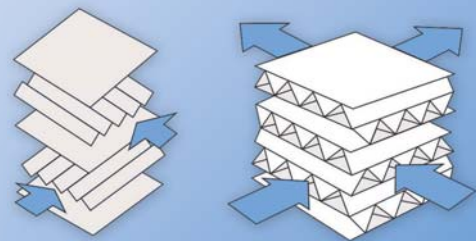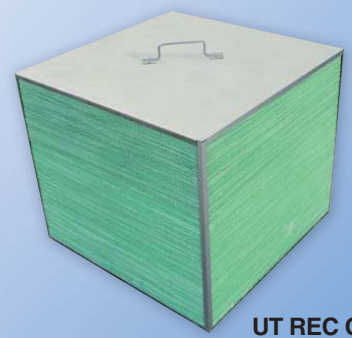

> UT REC R


Available with a high efficiency rotary-type heat recuperator.

Made in aluminium with a hygroscopic surface. Exchange efficiency is guaranteed by the quality of the seals that isolate the two air flows.

The rotor consists of alternate flat and corrugated aluminium sheets wrapped around each other.

This creates a "honeycomb" structure in whose channels the two air flows run in an opposed direction.

The surface, made porous by special treatments, allows the humidity to be absorbed, enabling recovery of the sensible and latent heat of the expelled air, resulting in recovery efficiency values above 85-90%.

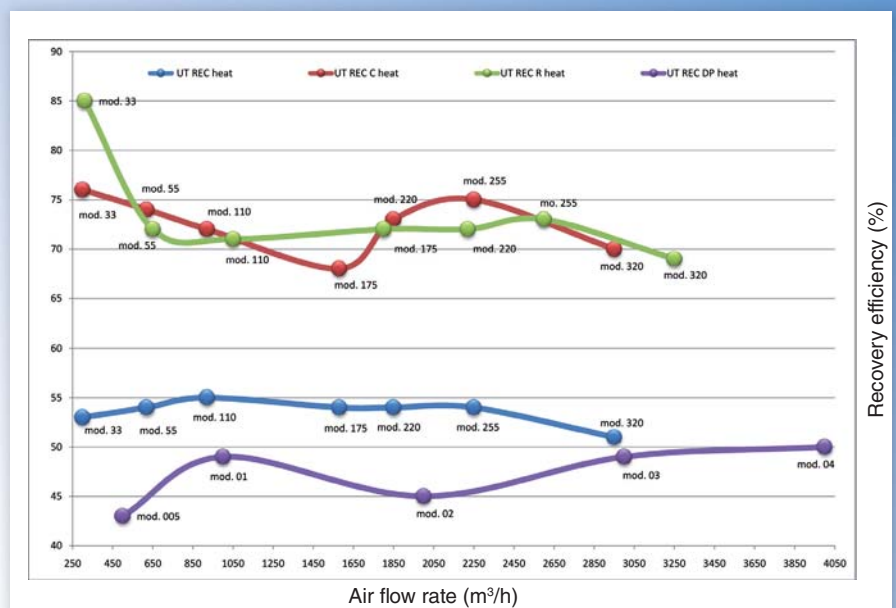

>>> INDUSTRIAL AIR-CONDITIONING <<<



> UT REC DP and DP F

Available with static-type heat recuperator in ALUMINIUM enabling recovery of the sensible heat otherwise lost. These units have a structure that enables outdoor installation, after application of a covering and suitable positioning.

The **UT REC DP** range features compact sizes < and the available accessories include a 2-row exchanger for heating only (acc. fitted).

The **UT REC DP F** range comes complete with a 4-row exchanger for cooling the air coming out the recovery exchanger. It therefore has larger dimensions than the previous version to enable lower speeds through the coil.

NB: The unit is designed to integrate the room air and ensure its change in a system. Cooling only, and not conditioning, is guaranteed.

> RECOVERY EFFICIENCY IN WINTER MODE

The graphs clearly show how recovery efficiency varies according to the period of operation and even of the type of recuperator.



Graph A shows how recovery efficiency increases according to the type of exchanger.

Reference conditions:
Outside Air T= - 5°C 80% R.H.
Room air T= 20°C 50% R.H.
max. speed.

> RECOVERY EFFICIENCY IN SUMMER MODE

In particular, Graph B shows how rotary heat recovery exchangers and paper pack heat recovery exchangers make an important contribution to energy-saving even in summer mode and therefore all year.

Reference conditions:
Outside Air T= 32°C 50% R.H.
Room air T= 26°C 50% R.H.
max. speed.

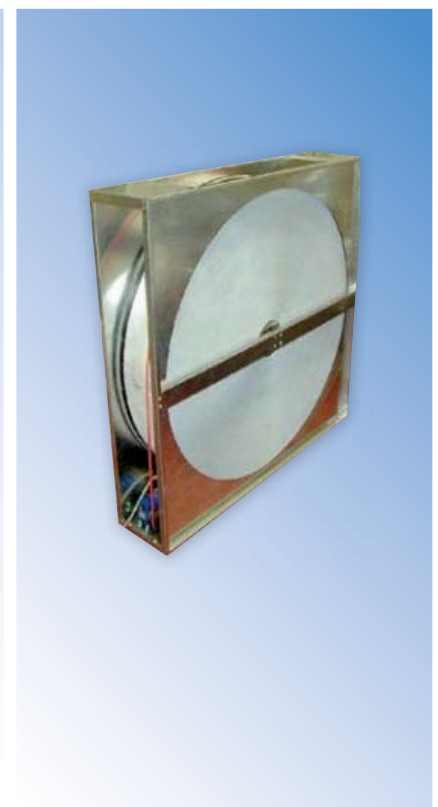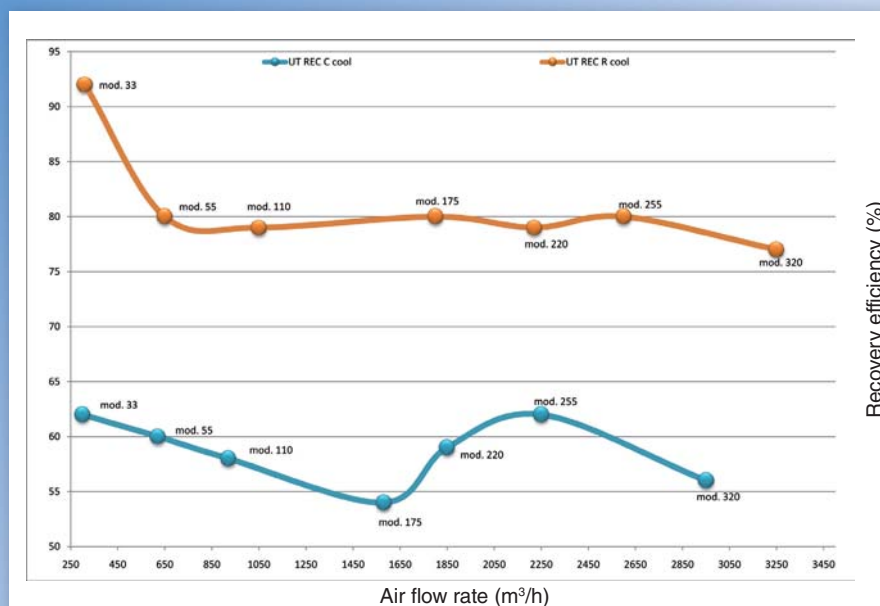

> UT REC - UT REC C

SINGLE-PANEL HEAT RECOVERY UNITS




Units Series

Unit type

UT REC with recuperator in aluminium



UT REC C with paper pack recuperator



Unit specification

The UT-REC and UT-REC C heat recovery units feature compact dimensions and easy assembly. The UT-REC and UT-REC C heat recovery units combine maximum room comfort with certain energy savings. Current air-conditioning and air handling systems require forced ventilation, which consequently involves the discharge of the conditioned air and as a result means signi-

ficant energy consumption and an increase in running costs.

The UT-REC and UT-REC C series have been designed to resolve these problems by the use of static exchangers.

The series UT-REC C adopts a heat recovery made of plane sheets of special paper. These exchangers are also called total heat recoveries:

in fact, they can recover both sensible and latent heat (humidity), with temperature efficiency between 60-80% and enthalpy efficiency between 50-70%.

For the UT-REC series, the heat recuperator is composed of aluminium plate, with air flows separated by special seal; this system allows to save over 50% of the energy that would otherwise be lost.

Both units can be perfectly integrated into traditional systems made up of fan coils, radiators and air-conditioning units, and work in both heating and cooling modes. The UT-REC and UT-REC C series are made up of nine models, covering a range of flow-rates from 300 m³/h to 5130 m³/h.

Each model is available in two versions:

- **Horizontal, called UT-REC/O, UT-REC C/O**

- **Vertical UT-REC/V, UT-REC C/V**

Moreover it is possible to realize lots of configurations. The high static pressure values available allow the use of ducting for the extraction or distribution of air in a series of rooms.


Main accessories/Options

- BE** Electric post-heating section
- BW** Post-heating internal water coil (mod. 110÷530)
- BFW** Water coil section
- SER** Regulation damper
- SC** Damper actuators
- SPC** N. 4 connections for circular ducts kit
- VVM** Electronic speed controller (only for mod. 33-55)
- COM3** Speed controller (mod. 110÷530)
- PCO** Unit control panel
 - Unit control panel with 0-10V output
 - Unit control panel with LCD display
 - Signal lamps kit
- 2xPRF** Pressure switch for dirty filter signal
- TA** Anti-freeze thermostat


CONFIGURATION

Depending on the configuration of the plant duct are available four possible configurations of recovery.


TYPE 01




TYPE 02



TYPE 03



TYPE 04



NB: Indicare sempre orientamento ed esecuzione in fase d'ordine

← ESP
↔ MAND

Technical data




MODEL - UT-REC, UT-REC C	33	55	110	175	220	255	320	410	530		
Nominal air flow	300	620	920	1580	1850	2250	2950	3920	5130	m ³ /h	
External static pressure ⁽¹⁾	265	55	65	70	77	80	100	100	130	Pa	
Total max absorbed current	1,2	1,8	2,2	4,4	4,8	5,2	8,3	5,0	6,6	A	
Sound pressure level ⁽²⁾	47	51	50	53	52	51	54	56	57,5	db (A)	
FANS - UT-REC, UT-REC C	33	55	110	175	220	255	320	410	530		
Power input	90 x 2	90 x 2	147 x 2	350 x 2	350 x 2	350 x 2	550 x 2	750 x 2	800 x 2	W	
Poles	2						4				n°
Speed number	1 ⁽³⁾						3 ⁽⁴⁾		2 ⁽⁴⁾		n°
Enclosure protection	44			55			44	55	20	IP	
Insulation class	F										
Electrical supply	230/1/50							400/3/50		V/ph/Hz	
PAPER HEAT EXCHANGER - UT-REC C	33	55	110	175	220	255	320	410	530		
Winter conditions ⁽⁵⁾											
Efficiency (temp/enthalpy)	76/62	74/60	72/56	68/55	73/65	75/67	70/62	66/56	67/57	%	
Heating recovery capacity	2,6	5,2	7,2	12,2	16,9	21,1	25,6	30,8	36,6	kW	
Supply air temperature	14,0	13,5	13,0	12,0	13,3	13,8	12,5	11,5	11,7	°C	
Supply air umidity	39,5	39,7	36,7	42,0	49,4	48,8	50,2	47,6	48,2	%	
Summer conditions ⁽⁶⁾											
Efficiency (temp/enthalpy)	62/60	60/58	58/55	54/53	59/59	62/62	56/55	52/51	53/52	%	
Heating recovery capacity	1,0	2,0	2,9	4,7	6,1	7,9	9,1	11,2	15,1	kW	
Supply air temperature	28,3	28,4	28,5	28,8	28,5	28,3	28,6	28,9	28,8	°C	
Supply air umidity	51,2	51,2	51,5	50,8	50,5	50,5	51,0	50,9	50,5	%	
PLATE HEAT EXCHANGER ⁽⁵⁾ - UT-REC	33	55	110	175	220	255	320	410	530		
Efficiency	53	54	55	54	54	54	51	57	50	%	
Heating recovery capacity	1,5	3,1	4,7	7,9	9,2	11,2	13,9	20,6	21,3	kW	
Supply air temperature	8,3	8,5	8,8	8,5	8,5	8,5	7,8	9,3	7,5	°C	
RE-HEAT WATER COIL - BW	33	55	110	175	220	255	320	410	530		
Heating capacity ⁽⁷⁾			8,2	12,2	14,4	20,3	24,2	29,9	40,6	kW	
Leaving air temperature ⁽⁷⁾	-	-	33,4	30,8	30,2	33,2	31,3	29,7	31,2	°C	
Air pressure drop ⁽⁷⁾	-	-	25	32	30	25	33	43	38	Pa	
Water pressure drop ⁽⁷⁾	-	-	8	14	15	17	22	30	20	kPa	
Geometry	-	-	2522	2522	2522	2522	2522	2522	2522		
Tubes for rank	-	-	14	18	18	22	22	22	22	n	
Rows	-	-	2	2	2	2	2	2	2	n	
Fin spacing	-	-	2,5	2,5	2,5	2,5	2,5	2,5	2,5	mm	
Diameter collectors	-	-	3/4	3/4	3/4	3/4	3/4	3/4	1	" GAS	
Weight	-	-	2,5	2,5	2,5	5	5	6,5	9	kg	
RE-HEAT ELECTRICAL RESISTANCE - BE	33	55	110	175	220	255	320	410	530		
Power rating ⁽⁹⁾	1,5	3	3	6	6	12	12	12	18	kW	
Voltage	230	230	400	400	400	400	400	400	400	V	
Phases	1	1	3	3	3	3	3	3	3	n	
Stadiums	1	1	1	1	1	1	1	1	1	n	
Absorption	6,5	13	4,3	8,65	8,65	17,3	17,3	17,3	26	A	
Leaving air temperature	23,3	22,2	17,6	18,1	17,5	22,3	19,3	16,7	18,6	°C	
Weight	1,5	1,5	2,5	2,5	2,5	5	5	5	8	kg	
SECTION WITH WATER COIL HEATING / COOLING - BFW	33	55	110	175	220	255	320	410	530		
Heating capacity ⁽⁷⁾	4,7	8,2	12	19,7	23,7	30,5	37	46,2	59,3	kW	
Leaving air temperature ⁽⁷⁾	52,8	45,6	45	43,4	44,5	46,5	43,7	41,5	41,8	°C	
Water flow rate ⁽⁷⁾	0,4	0,7	1,1	1,7	2,1	2,7	3,3	4,1	5,2	m ³ /h	
Water pressure drop ⁽⁷⁾	3	7	6	20	34	30	43	36	37	kPa	
Air pressure drop ⁽⁷⁾	10	13	27	38	34	25	38	50	55	Pa	
Total cooling capacity ⁽⁸⁾	2	3,5	5	8,8	11,1	14,7	17,4	20,9	26,2	kW	
Sensible cooling capacity ⁽⁸⁾	1,3	2,3	3,3	5,8	7,2	9,4	11,4	13,9	17,4	kW	
Leaving air temperature ⁽⁸⁾	16,9	18,7	19	18,9	18,7	17,3	18,3	19,3	19,4	°C	
Water flow rate ⁽⁸⁾	0,3	0,6	0,9	1,5	1,9	2,5	3,0	3,6	4,5	m ³ /h	
Water pressure drop ⁽⁸⁾	3	7	6	21	39	36	49	39	35	kPa	
Air pressure drop ⁽⁸⁾	20	30	38	48	45	35	52	65	62	Pa	
Geometry	2522	2522	2522	2522	2522	2522	2522	2522	2522	-	
Tubes for row	13	13	16	22	25	26	26	26	32	n°	
Rows	3	3	3	3	3	3	3	3	3	n°	
Fin spacing	2,1	2,1	2,1	2,1	2,1	2,1	2,1	2,1	2,1	mm	

(1) Referred to the nominal air flow after plate heat exchanger and G4 standard filters.
 (2) Sound pressure level: data referred to 1,5 meters from inlet in free field. The actual operation noise level generally differs from the values shown in the table, depending on the operation conditions, on the reflected noise and on the surrounding noise.
 (3) Adjustable with electronic speed controller VVM (optional)
 (4) Selectionable with COM3 or PCO control (optional)
 (5) Nominal winter conditions:
 outside air: -5°C DB, RH 80 % - ambient air: 20°C DB, RH 50 %
 (6) Nominal summer conditions:
 outside air: 32°C DB, RH 50 % - ambient air: 26°C DB, RH 50 %
 (7) Data referred to: Ting. air 8 ° C, water in / out 70/60 ° C, nominal air flow
 (8) Data referred to: Ting. air 30 ° C, 50% RH Water in / out 7/12 ° C, nominal air flow
 (9) Data referred to: Ting. air 8 ° C and nominal air flow
 The pressure drop is between 2 and 10 Pa



DIMENSIONS

(drawing indicative of the series)


HORIZONTAL MODELS

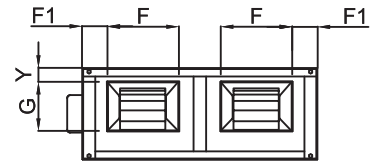

Configuration 1 e 2

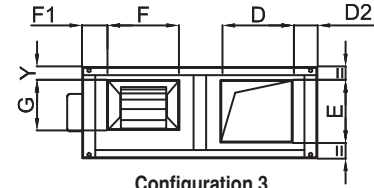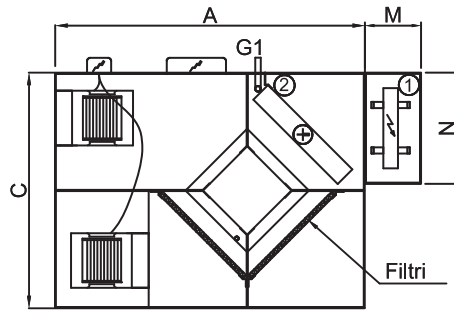

Configuration 3



Configuration 4

Key

1 Electric heater BE (optional). For UT-REC models the electric heater is internal, for UT-REC C models the external section is provided.
 2 Post-heating internal water coil BW (optional. Not available for sizes 33-55)


Mod.	33	55	110	175	220	255	320	410	530	
A	990	990	1140	1300	1380	1650	1650	1750	1970	mm
B	290	290	410	500	500	600	600	600	700	mm
C	750	750	860	860	960	1230	1230	1330	1400	mm
D	200	200	260	290	310	410	410	410	510	mm
D1	92	92	95	77	87	91	91	116	85	mm
D2	92	92	115	77	87	91	91	116	85	mm
E	210	210	210	310	330	410	410	410	510	mm
F	224	224	220	225	225	288	321	321	321	mm
F1	85	85	115	109	129	152	135	160	178	mm
G	100	100	200	255	255	255	280	280	280	mm
G1 (1)	-	-	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	ø gas
M (2)	250	250	250	250	250	250	250	250	250	mm
N (2)	380	380	450	430	480	570	570	570	600	mm
Y	130	130	50	75	75	162	125	125	225	mm
Weight	41	45	80	125	138	160	174	190	209	kg

(1) Only with post-heating water coil BW
 (2) Only for UT-REC C models with electric heater BE (installed in external section)

DIMENSIONS

(drawing indicative of the series)

VERTICAL MODELS

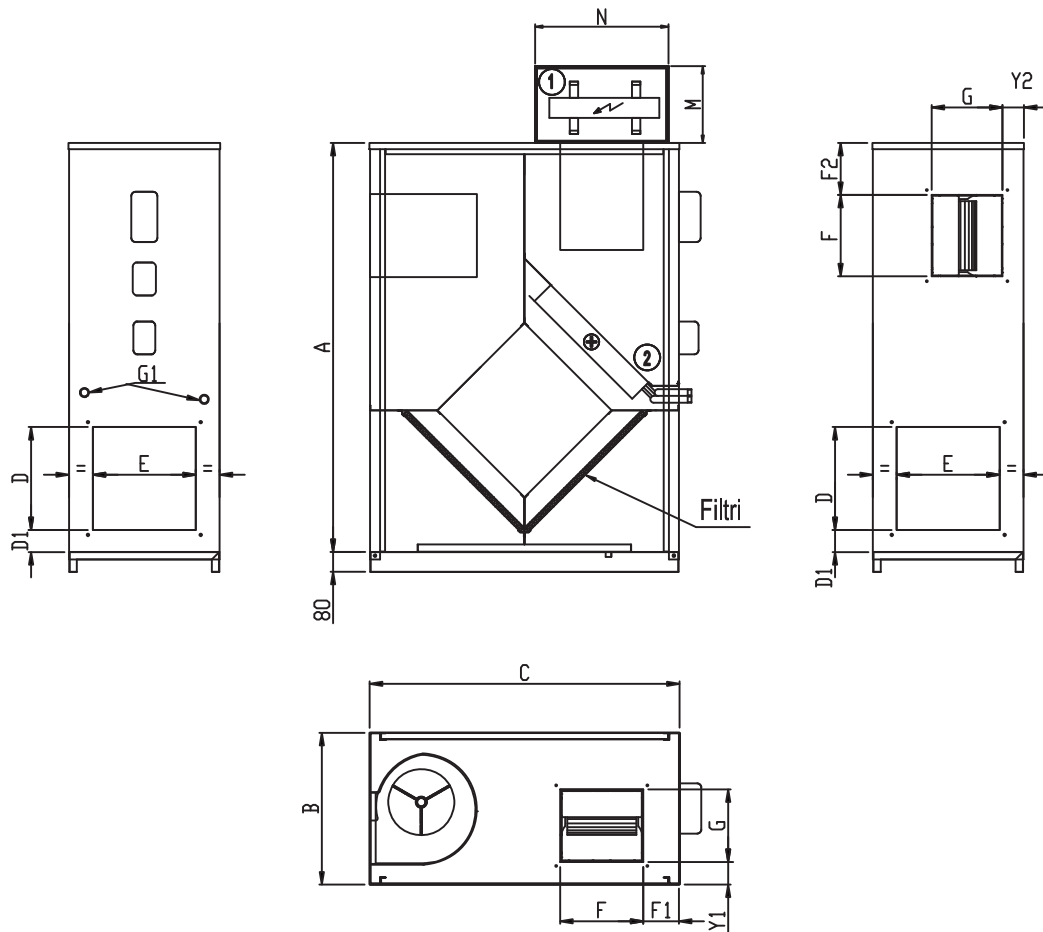

Legenda

1 Electric heater BE (optional). For UT-REC models the electric heater is internal, for UT-REC C models the external section is provided.
 2 Post-heating internal water coil BW (optional. Not available for sizes 33-55)

Mod.	33	55	110	175	220	255	320	410	530	
A	990	990	1140	1300	1380	1650	1650	1750	1970	mm
B	290	290	410	500	500	600	600	600	700	mm
C	750	750	860	860	960	1230	1230	1330	1400	mm
D	210	210	260	290	290	410	410	410	510	mm
D1	137	137	62	47	47	87	87	87	87	mm
E	200	200	220	310	310	410	410	410	510	mm
F	224	224	225	225	225	291	324	324	324	mm
F1	80	80	115	105	115	163	147	147	180	mm
F2	155	155	148	158	158	223	207	207	207	mm
G	100	100	201	255	255	255	282	282	282	mm
G1 (1)	-	-	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	ø gas
M (2)	250	250	250	250	250	250	250	250	250	mm
N (2)	380	380	450	430	480	570	570	570	600	mm
Y1	54	54	70	80	80	104	100	100	100	mm
Y2	54	54	62	78	78	95	85	85	85	mm
Weight kg	37	41	72	113	125	144	157	171	188	kg

(1) Only with post-heating water coil BW
 (2) Only for UT-REC C models with electric heater BE (installed in external section)

> UT REC R

SINGLE PANEL ROTARY HEAT RECOVERY UNITS



Units Series

Unit type

UT REC R horizontal configuration

Unit specification

The UT-REC R horizontal heat recovery units feature compact dimensions and easy assembly. The rotary heat exchanger is made from aluminium sheets, alternately plane and corrugated, one another wrapped. The result is a honey-comb structure in which conducts pass both the fresh air and the stale air flows. The exchanger surface, made porous and hygroscopic by some treatments, allows to absorb the humidity. Half the rotor is immersed in the stale air flow which (in winter conditions) yields heat and humidity to the hygroscopic matrix; then, as a consequence of rotation, the fresh air flows in these conducts, recovering both heat and humidity (latent heat). The two fans are centrifugal type.

The rotary exchanger allows, in winter conditions, to recover both the sensible and the latent heat. So it's possible to achieve peak efficiency up to 90%. In summer conditions a part of the humidity contained in the inlet flow is ceded to the expulsion flow, achieving analogous peak efficiency. Thanks to this high efficiency, the fresh air in winter conditions can be directly introduced in air-conditioned rooms, without installing post-heating sections.

The inlet fan is pressing on the heat exchanger, so the air blow-by direction is from the fresh air to the stale air flow.

The drain pan collector is not present because the humidity contained in one of air flows is partially absorbed by the porous surface but then completely transferred to the opposite flow: therefore the humidity condensation is avoided.


With the fans working, it is possible to stop the heat exchanger rotation: so we realize a "virtual bypass", useful during the between seas.

Main accessories/Options

- BE Electric post-heating section
- BFW Water coil section
- SER Regulation damper
- SC Damper actuators
- SPC N. 4 connections for circular ducts kit
- VVM Electronic speed controller (only for mod. 33-55)
- COM3 Speed controller COM3
- PCO Unit control panel
- 2xPRF Pressure switch for dirty filter signal
- TA Anti-freeze thermostat

CONFIGURATION

Depending on the configuration of the plant duct are available four possible configuration of recovery.

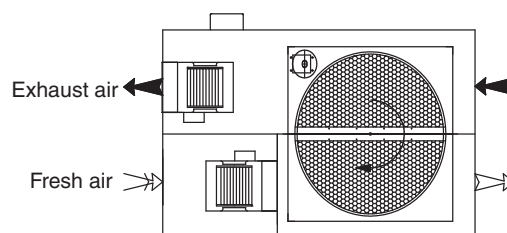

Dati tecnici

MODEL - UT-REC R	33	55	110	175	220	255	320	410	530		
Nominal air flow	310	650	1050	1800	2220	2600	3250	4290	5300	m ³ /h	
Static pressure ⁽¹⁾	260	65	80	130	100	110	125	130	145	Pa	
Absorption max. total machine	1,2	1,8	2,5	4,8	5,2	5,6	8,7	5,4	6,6	A	
Sound pressure level ⁽²⁾	47	51	47	51	50	48	50	54	58	db (A)	
FANS	33	55	110	175	220	255	320	410	530		
Power available to the axis	90 x 2	90 x 2	147 x 2	350 x 2	350 x 2	350 x 2	550 x 2	750 x 2	800 x 2	W	
Poli	2						4			n°	
number of speeds	1 ⁽³⁾						3 ⁽⁴⁾		2 ⁽⁴⁾	n°	
Degree of protection			44				55	44	55	20	IP
Class of insulation	F										
power Supply	230/1/50							400/3/50		V/ph/Hz	

(1) Referred to the nominal air flow after plate heat exchanger and G4 standard filters.

(2) Sound pressure level: data referred to 1,5 meters from inlet in free field. The actual operation noise level generally differs from the values shown in the

table, depending on the operation conditions, on the reflected noise and on the surrounding noise.

(3) Adjustable with electronic speed controller VVM (optional)

(4) Selectionable with COM3 or PCO control (optional)

Technical data


HEAT RECOVERY	33	55	110	175	220	255	320	410	530	
Winter conditions ⁽⁵⁾										
Efficiency (temperature / enthalpy)	79/76	72/69	71/68	72/69	72/69	72/69	69/67	63/63	64/62	%
Thermal power recovered	3,0	6,3	10,0	17,4	21,3	25,2	30,5	38,0	42,0	kW
Treated air temperature	14,7	13,0	12,7	12,9	12,9	13,1	12,3	10,6	11,1	°C
Humidity treated air	56,0	57,6	58,7	57,6	57,9	57,2	60,3	67,5	62,1	%
Summer conditions ⁽⁶⁾										
Efficiency (temperature / enthalpy)	79/74	80/69	79/69	80/69	79/69	80/69	77/68	70/66	70/66	%
Thermal power recovered	1,3	2,5	4,0	6,9	8,5	10,0	12,3	15,7	19,4	kW
Treated air temperature	27,3	27,2	27,3	27,2	27,3	27,2	27,4	27,8	27,8	°C
Humidity treated air	52,0	53,7	53,4	53,7	53,4	53,7	53,1	51,9	52,1	%
RE-HEAT ELECTRICAL RESISTANCE - BE										
Power rating ⁽⁹⁾	1,5	3	3	6	6	12	12	18	18	kW
Voltage	230	230	400	400	400	400	400	400	400	V
Phases	1	1	3	3	3	3	3	3	3	n
Stadiums	1	1	1	1	1	1	1	1	1	n
Absorption	6,5	13	4,3	8,65	8,65	17,3	17,3	17,3	26	A
T air outlet	26,4	25,8	20,6	21,8	20,2	25,8	23,1	20,4	22,0	°C
Weight	1,5	1,5	2,5	2,5	2,5	5	5	5	8	kg
SECTION WITH WATER COIL HEATING / COOLING- BFW										
Heating capacity ⁽⁷⁾	4,5	7,9	12,3	19,7	24,8	31,5	36,4	45,4	57,0	kW
Leaving air temperature ⁽⁷⁾	53,6	46,8	45,2	43,2	43,8	46,5	43,9	42,4	43,1	°C
Water flow ⁽⁷⁾	0,4	0,7	1,0	1,7	2,1	2,6	3,1	3,7	5,0	m³/h
Water pressure drop ⁽⁷⁾	3	7	4	11	20	18	22	21	34	kPa
Air pressure drop ⁽⁷⁾	11	38	28	41	39	27	40	53	60	Pa
Total cooling capacity ⁽⁸⁾	2,1	3,6	5,4	9,5	12,4	16,1	18,5	22,1	27,1	kW
Sensible cooling capacity ⁽⁸⁾	1,3	2,4	3,6	6,3	8,2	10,4	12,1	14,7	18,1	kW
Leaving air temperature ⁽⁸⁾	17,0	19,0	19,6	19,4	18,8	17,9	18,7	19,6	19,6	°C
Water flow ⁽⁸⁾	0,4	0,6	0,9	1,7	2,2	2,9	3,2	3,8	4,6	m³/h
Water pressure drop ⁽⁸⁾	2,8	7,5	4	15	27	26	30	30	37	kPa
Air pressure drop ⁽⁸⁾	14	38	38	50	53	45	48	60	76	Pa
Geometry	2522	2522	2522	2522	2522	2522	2522	2522	2522	-
Tubes for row	13	13	16	22	25	26	26	26	32	n°
Rows	3	3	3	3	3	3	3	3	3	n°
Fin spacing	2,1	2,1	2,1	2,1	2,1	2,1	2,1	2,1	2,1	mm

- (5) Nominal winter conditions:
outside air: -5°C DB, RH 80 % - ambient air: 20°C DB, RH 50 %
- (6) Nominal summer conditions:
Outdoor air: 32 °C DB, 50% RH - Ambient air: 26 °C DB, 50% RH
- (7) Data referred to: Ting. air 12 °C, water temperature in / out 70/60 °C, nominal air flow

- (8) Data referred to: Ting. air 30 °C, 50% RH Water in / out 7/12 °C, air flow rate nominal
- (9) Data referred to: Ting. air 12 °C and nominal air flow
The pressure drop is between 2 and 10 Pa

DIMENSIONS

(drawing indicative of the series)

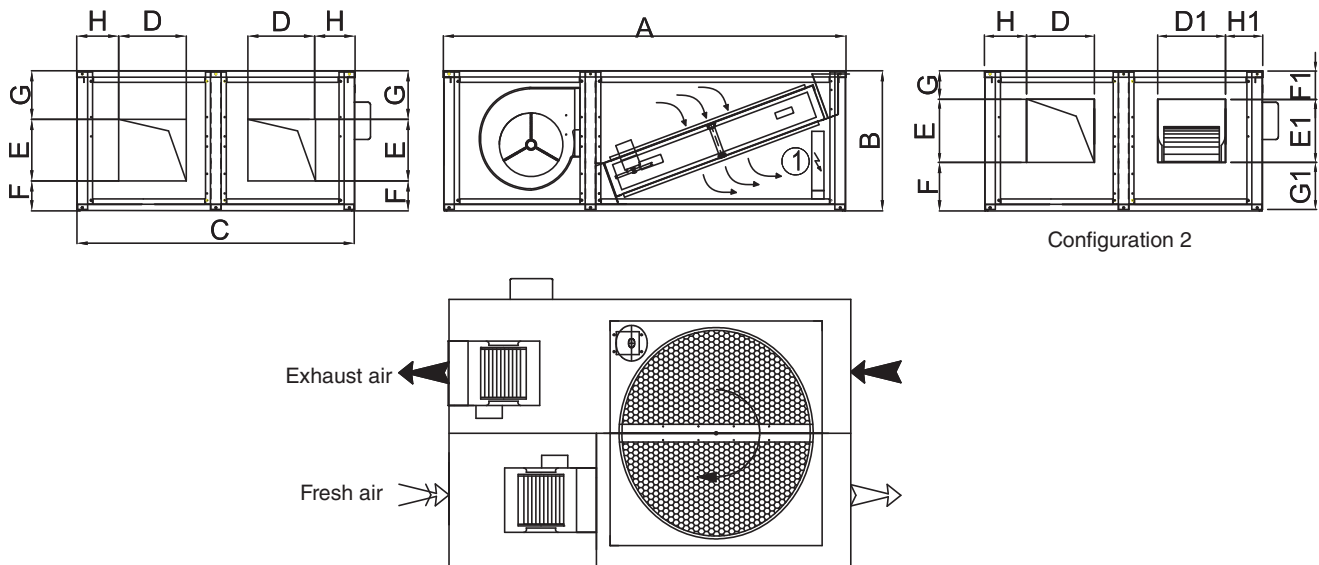

Mod.	33	55	110	175	220	255	320	410	530
A mm	1075	1075	1205	1400	1540	1720	1720	1900	1900
B mm	425	425	460	530	560	600	600	700	700
C mm	750	750	860	860	960	1230	1230	1230	1400
D mm	200	200	260	290	290	410	410	410	510
D1 mm	224	224	225	225	225	288	325	325	325
E mm	210	210	220	310	310	410	410	410	510
E1 mm	100	100	200	255	255	255	280	280	280

Mod.	33	55	110	175	220	255	320	410	530
F mm	75	75	63	70	75	77	77	77	77
F1 mm	195	195	162	170	160	170	200	200	200
G mm	140	140	177	150	175	113	113	113	113
G1 mm	130	130	98	105	145	175	120	120	220
H mm	92	92	112	112	104	112	112	112	105
H1 mm	85	85	110	112	136	150	150	150	195
Weight kg	67	71	102	139	152	178	194	207	225

> UT REC DP

DOUBLE PANEL HEAT RECOVERY UNITS



Units Series

Unit type

UT-REC DP H Horizontal unit

UT-REC DP V vertical unit

Unit specifications

■ **SUPPORT STRUCTURE:** in strong extruded aluminium profiles and double panel in galvanised steel sheet inside and prepainted galvanised sheet steel outside, with thermal insulation and soundproofing in hot-injected polyurethane foam, thick. 23 mm.



- **HEAT RECUPERATOR:** static-type in aluminium enabling recovery of the heat otherwise lost. Efficiency is guaranteed by the quality of the insulation.
- **CONDENSATE TRAY:** in sheet steel, it is placed under the recuperator for the condensate in summer mode.
- **AIR FILTER:** made with pleated filter cells, class G4 (ponderal eff. 90.1%), metal frame and electrowelded screen, easily removed from side.
- **FAN MOTOR:** a directly coupled type, three-speed with internal thermal protection and startup capacitor always on, with wheel statically and dynamically balanced to minimise noise and vibration.

Main accessories/Options

- BW** - Hot water re-heating coil providing for the use of a 2-row coil.
- BE** - electric re-heating section.
- MS** - Safety microswitch
- CV3** - 3 speeds selector
- CST** - Star-Delta start up

Layout


Unit are available in horizontal and vertical layout

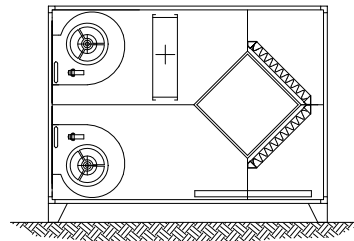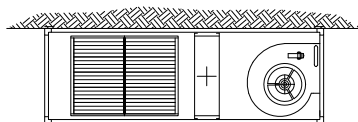


Configuration

Depending on the configuration of the plant duct are available six possible configuration of recovery.


CONFIGURATION 01

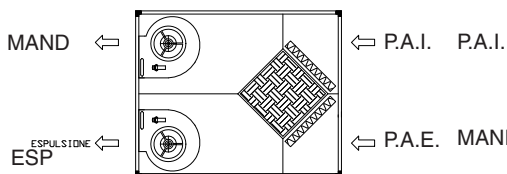


CONFIGURATION 02

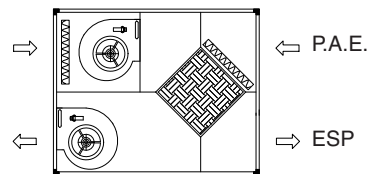


CONFIGURATION 03

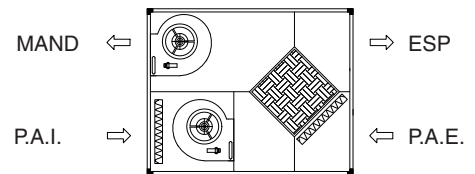


CONFIGURATION 04

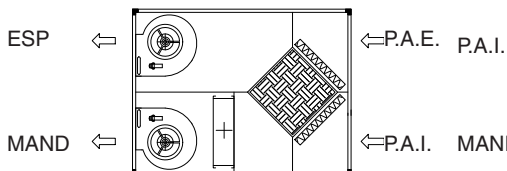

CONFIGURATION 05

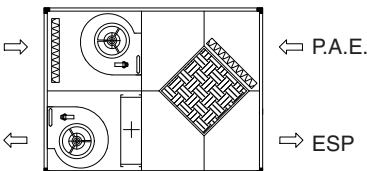

CONFIGURATION 06

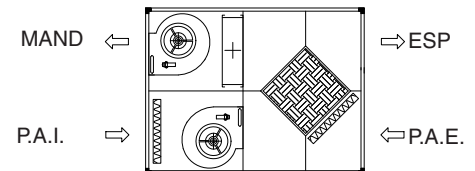

Note: Always indicate layout and configuration when ordering

Dati tecnici


Supply fan	005	01	02	03	04	
Air flow	500	1.000	2.000	3.000	4.000	m³/h
Static pressure	162	137	144	208	172	Pa
Absorption max. total	0,72	1,7	5,4	5,9	3,3	A
Power available to the axis	60	184	550	550	750	W
number of speeds	4	3	3	3	2	n°
Poli	2	4	4	4	4	n°
Degree of protection	32	55	55	10	55	IP
Class of insulation	B	F	F	F	F	Tipo
Sound pressure level at the mouth of the outlet fan (1 meter away) ⁽¹⁾	59	62	66	65	69	dB(A)
Sound pressure level on the suction fan (1 meter away) ⁽¹⁾	58	61	65	64	68	dB(A)
Pressure level radiated sound pressure level (at 1 meter away from carpentry) ⁽¹⁾	46	48	52	57	57	dB(A)
Supply	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	V/ph/Hz
Return fan	005	01	02	03	04	
Air flow	500	1.000	2.000	3.000	4.000	m³/h
Static pressure	160	134	135	200	161	Pa
Absorption max. total	0,72	1,7	5,4	5,9	3,3	A
Power available to the axis	60	184	550	550	750	W
number of speeds	4	3	3	3	2	n°
Poli	2	4	4	4	4	n°
Degree of protection	32	55	55	10	55	IP
Class of insulation	B	F	F	F	F	Tipo
Sound pressure level at the mouth of the outlet fan (1 meter away) ⁽¹⁾	59	62	66	65	69	dB(A)
Sound pressure level on the suction fan (1 meter away) ⁽¹⁾	58	61	65	64	68	dB(A)
Pressure level radiated sound pressure level (at 1 meter away from carpentry) ⁽¹⁾	46	48	52	57	57	dB(A)
Supply	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	V/ph/Hz
Performance recovery	005	01	02	03	04	
Recovery type / Recuperator	cross flow and static type / High efficiency aluminium plate exchanger					e
Winter conditions						
P.A.I. (Room air)	22/50	22/50	22/50	22/50	22/50	°C/%
ESP (Exhaust air)	9,5/94,8	10,6/91,4	9,6/94,4	10,3/92,8	10,4/92,4	°C/%
P.A.E. (Ambient air)	-5,0/80	-5,0/80	-5,0/80	-5,0/80	-5,0/80	°C/%
MAND (Fresh air)	10,7/24,9	8,8/28,1	10,4/25,3	9,3/27,2	9,1/27,6	°C/%
REC (Heating recovery capacity)	2,62	4,63	10,3	14,4	18,9	kW
Efficiency recovery (sensible/latent)	58	51,2	57,1	53,1	52,3	%
Accessory BW	005	01	02	03	04	
Heat exchanger type	rame / alluminio					Tipo
Number of ranks	2	2	2	2	2	n°
Coil	1/2"	1/2"	3/4"	3/4"	3/4"	ø
Inlet air temperature	10,7	8,8	10,4	9,3	9,1	°C
Water 70/60						
Leaving air temperature	32,8	31,5	25,5	24,3	24,3	°C
Water temperature in / out	70/60	70/60	70/60	70/60	70/60	°C
Heat output	3,7	7,7	10,2	15,2	20,4	kW
Pressure drop on the air side	13	15	45	54	57	Pa
Pressure drop on the water side	1,2	7	4,1	7,8	11,1	kPa
Water 45/40						
Leaving air temperature	23,6	22,4	19,2	18,2	18,1	°C
Water temperature in / out	45/40	45/40	45/40	45/40	45/40	°C
Heat output	2,2	4,6	5,9	9	12,2	kW
Pressure drop on the air side	13	15	45	54	56	Pa
Pressure drop on the water side	1,6	10,1	4,7	10,1	15,9	kPa
Weight	6	9	9	10	12	kg
Accessory BE	005	01	02	03	04	
Power rating	2,5	5	10	15	15	kW
Stadiums	1	1	2	2	2	n°
Power supply	400/3/50					V/ph/Hz
Current consumption	3,61	7,22	14,43	21,65	21,65	A
Air temperature input / output	10,7/25,7	8,8/23,8	10,4/25,4	9,3/24,3	9,1/20,35	°C
Weight	5	6	7	8	9	kg

(1): Theoretical values estimated using a tolerance of 2 [dBA]

DIMENSIONS

(drawing indicative of the series)


UT-REC DP H Horizontal units

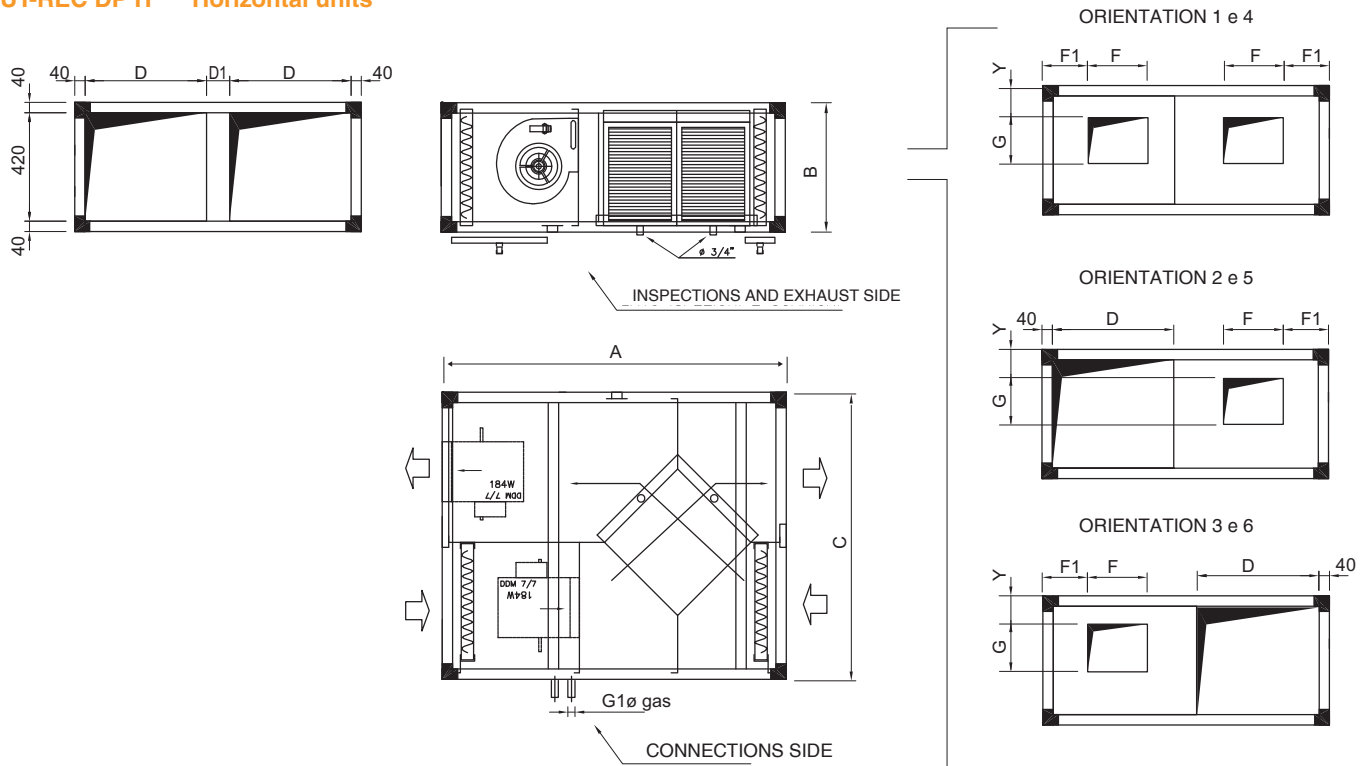

Mod.	005	01	02	03	04	
A	1170	1330	1450	1700	1800	mm
B	400	500	500	550	650	mm
C	1040	1110	1140	1250	1400	mm
D	440	470	485	540	615	mm
D1	80	90	90	90	90	mm
E	320	420	420	470	570	mm
F	160	232	232	265	330	mm
F1	200	180	155	225	220	mm
G	97	208	208	289	290	mm
G1 (1)	1/2"	1/2"	3/4"	3/4"	3/4"	Ø gas
Y	86	60	60	60	60	mm
weight	89	124	145	186	229	kg

(1) Only if there is a water coil reheat BW

UT-REC DP V vertical unit

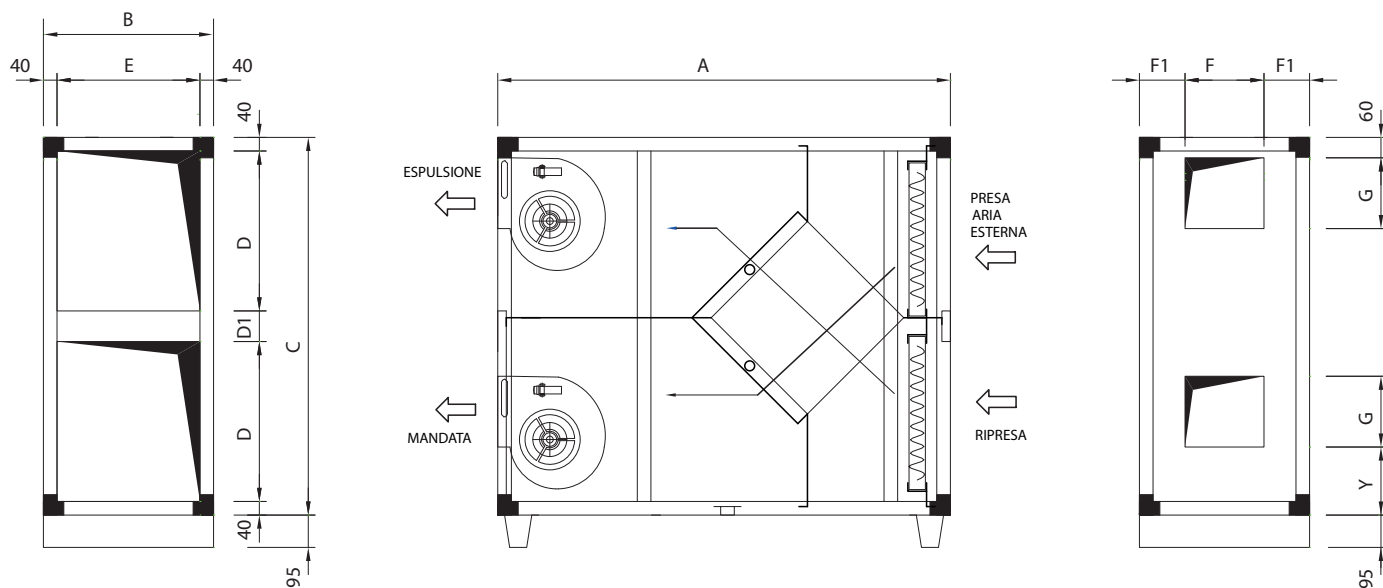

Mod.	005	01	02	03	04	
A	1170	1330	1450	1700	1800	mm
B	400	500	500	550	650	mm
C	1040	1110	1140	1250	1400	mm
D	440	470	485	540	615	mm
D1	80	90	90	90	90	mm
E	320	420	420	470	570	mm
F	160	232	298	265	330	mm
F1	120	134	101	142.5	160	mm
G	97	208	262	289	290	mm
Y	200	200	200	250	250	mm
weight	89	124	145	186	229	kg

> UT REC DP F

DOUBLE PANEL HEAT RECOVERY UNIT WITH INTEGRATED WATER COIL



Units Series

Unit type

UT-REC DP F Horizontal unit

Unit specifications

- **SUPPORT STRUCTURE:** in strong extruded aluminium profiles and double panel in galvanised steel sheet inside and prepainted galvanised steel sheet outside, with thermal insulation and soundproofing in hot-injected polyurethane foam, thick. 23 mm.
- **HEAT RECUPERATOR:** static-type in aluminium enabling recovery of the heat otherwise lost. Efficiency is guaranteed by the quality of the insulation.


- **CONDENSATE TRAY:** in steel sheet, it is placed under the recuperator for the condensate in summer mode.
- **AIR FILTER:** made with pleated filter cells, class G4 (ponderal eff. 90.1%), metal frame and electrowelded screen, easily removed from side.
- **FAN MOTOR:** a directly coupled type, three-speed with internal thermal protection and startup capacitor always on, with wheel statically and dynamically balanced to minimise noise and vibration.
- **HEAT EXCHANGER:** made with copper pipes arranged in staggered rows to increase heat exchange and aluminium fins locked by mechanical expansion of the pipes, with 4 rows for air conditioning and heating.

Main accessories/Options

- MS - Safety microswitch
- CV3 - 3 speeds selector
- CST - Star-Delta start up
- VVM12A - Single-phase speed controller

Layout


Unit are available in horizontal layout

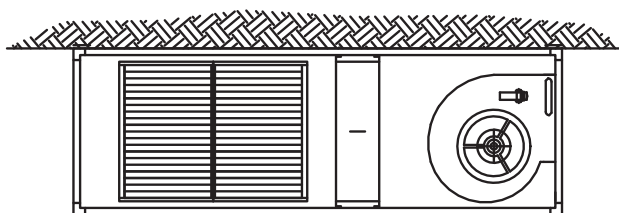


Configuration

Depending on the configuration of the plant duct are available three possible configuration of recovery.


CONFIGURATION 01

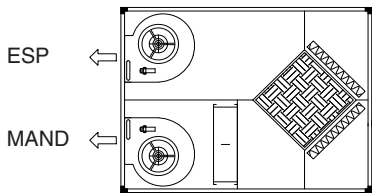


CONFIGURATION 02

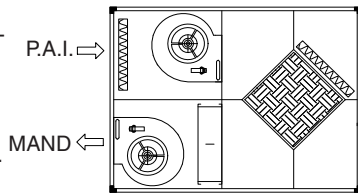

CONFIGURATION 03

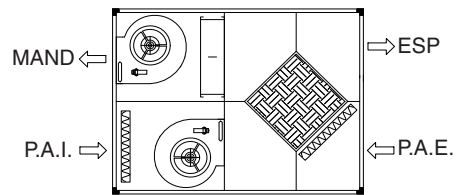

Note: Always indicate configuration when ordering

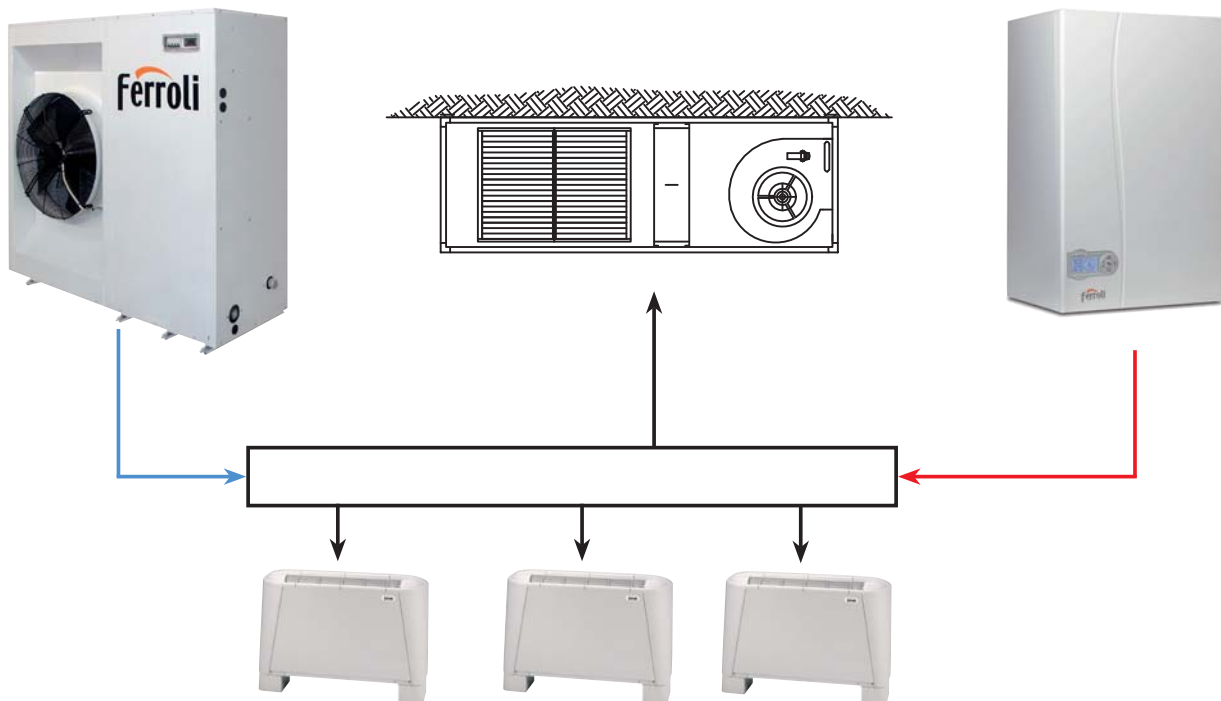

NB: For correct operation of the unit in heating, maximum delivery water temperatures up to $T=50^{\circ}\text{C}$ are acceptable. Therefore connection to a condensing-type boiler, as indicated in the diagram opposite, is advisable. If the unit is connected to a conventional boiler, the use of a 3-way valve with adjustment on the temperature of delivery to the system is indispensable.

NB: The unit is designed to integrate the primary air and therefore guarantee the air change in an existing system. It only guarantees cooling, and not conditioning (see example above).


Technical data

Supply fan	005	01	02	03	04	
Air flow	500	1.000	2.000	3.000	4.000	m³/h
Static pressure	92	143	101	117	72	Pa
Absorption max. total	0,72	3,1	5,4	5,7	3,3	A
Power available to the axis	60	350	550	550	750	W
number of speeds	4	3	3	3	2	n°
Poli	2	4	4	4	4	n°
Degree of protection	32	55	55	10	55	IP
Class of insulation	B	F	F	F	F	
Sound pressure level at the mouth of the outlet fan (1 meter away) ⁽¹⁾	59	63	66	67	69	dB(A)
Sound pressure level on the suction fan (1 meter away) ⁽¹⁾	58	62	65	66	68	dB(A)
Pressure level radiated sound pressure level (at 1 meter away from carpentry) ⁽¹⁾	46	46	52	56	57	dB(A)
Supply	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	V/ph/Hz
Return fan	005	01	02	03	04	
Air flow	500	1.000	2.000	3.000	4.000	m³/h
Static pressure	157	130	115	121	152	Pa
Absorption max. total	0,72	1,7	3,1	7,1	3,3	A
Power available to the axis	60	184	350	550	750	W
number of speeds	4	3	3	3	2	n°
Poli	2	4	4	4	4	n°
Degree of protection	32	55	55	10	55	IP
Class of insulation	B	F	F	F	F	
Sound pressure level at the mouth of the outlet fan (1 meter away) ⁽¹⁾	59	62	64	65	69	dB(A)
Sound pressure level on the suction fan (1 meter away) ⁽¹⁾	58	61	63	64	68	dB(A)
Pressure level radiated sound pressure level (at 1 meter away from carpentry) ⁽¹⁾	46	48	51	54	57	dB(A)
Supply	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	V/ph/Hz
Performance recovery	005	01	02	03	04	
Recovery type / Recuperator	cross flow and static type / High efficiency aluminium plate exchanger					
Winter conditions						
P.A.I. (Room air)	22/50	22/50	22/50	22/50	22/50	°C/%
ESP (Exhaust air)	9,5/94,8	10,6/91,4	11,0/90,3	10,3/92,8	10,4/92,4	°C/%
P.A.E. (Ambient air)	-5,0/80	-5,0/80	-5,0/80	-5,0/80	-5,0/80	°C/%
MAND (Fresh air)	10,7/24,9	8,8/28,1	8,3/29,1	9,3/27,2	9,1/27,6	°C/%
REC (Heating recovery capacity)	2,62	4,63	8,92	14,4	18,9	kW
Efficiency recovery (sensible/latent)	58	51,2	49,3	53,1	52,3	%
Summer conditions						
P.A.I. (Room air)	28/50	28/50	28/50	28/50	28/50	°C/%
ESP (Exhaust air)	30,1/44,3	29,8/44,9	29,8/45,1	29,9/44,6	29,9/44,7	°C/%
P.A.E. (Ambient air)	32,0/50	32,0/50	32,0/50	32,0/50	32,0/50	°C/%
MAND (Fresh air)	29,9/56,3	30,2/55,5	30,2/55,3	30,1/55,9	30,1/55,8	°C/%
REC (Heating recovery capacity)	0,34	0,61	1,18	1,95	2,56	kW
Efficiency recovery (sensible/latent)	51,5	45,5	43,9	48,5	47,8	%
Exchanger performance	005	01	02	03	04	
Heat exchanger type	copper / aluminum					
Number of ranks	3	3	3	3	3	3
Coil	1/2"	3/4"	1"	1 1/4"	1 1/4"	∅
Regime summer water 7/12						
Inlet air temperature / humidity	29,9/56	30,2/55	30,2/55	30,1/56	30,1/55	°C/%
Leaving air temperature / humidity	17/100	17,1/100	18,3/97	17,6/100	17,6/98	°C/%
Water temperature in / out	7/12	7/12	7/12	7/12	7/12	°C
Cooling capacity	3,5	6,8	11,8	19,3	25,6	kW
Pressure drop on the air side	65	95	98	113	78	Pa
Pressure drop on the water side	6,7	7,7	10,7	15,9	15	kPa
Water regime winter 45/40						
Inlet air temperature / humidity	10,7/25	8,8/28	8,3/29	9,3/27	9,1/28	°C
Leaving air temperature / humidity	36,9/5	36,9/5	34,2/6	36,3/5	35,8/5	°C
Water temperature in / out	45/40	45/40	45/40	45/40	45/40	°C
Thermal power	4,4	9,5	17,5	27,4	36,1	kW
Pressure drop on the air side	35	53	58	65	43	Pa
Pressure drop on the water side	9,3	11,5	19,1	26,4	25	kPa
Water regime winter 70/60						
Inlet air temperature / humidity	10,7/25	8,8/28	8,3/29	9,3/27	9,1/28	°C
Leaving air temperature / humidity	55,8/2	55,9/2	51,4/2	54,9/2	54,0/2	°C
Water temperature in / out	70/60	70/60	70/60	70/60	70/60	°C
Thermal power	7,6	15,9	29,2	46,4	60,8	kW
Pressure drop on the air side	35	53	58	65	43	Pa
Pressure drop on the water side	6,8	8,5	13,1	18,5	17,5	kPa

⁽¹⁾ : Theoretical values estimated using a tolerance of 2 [dBA]

DIMENSIONS

(drawing indicative of the series)

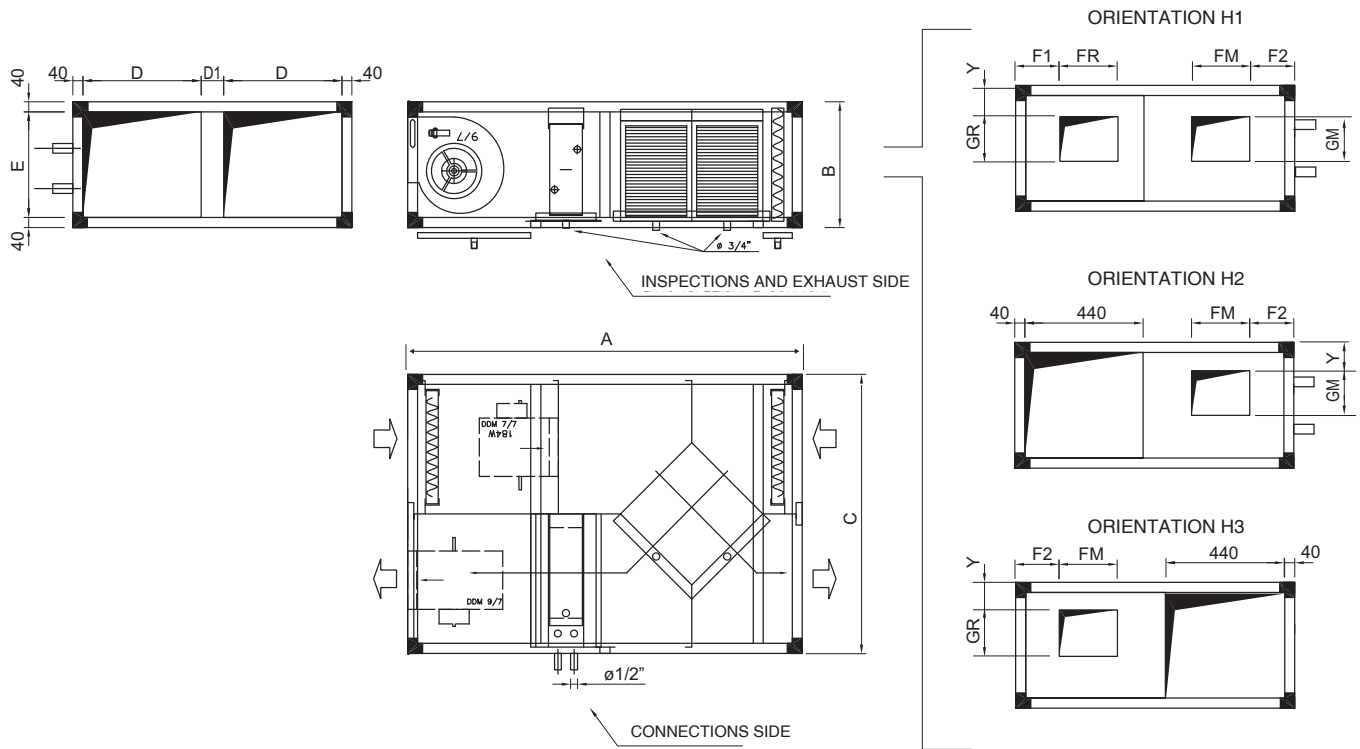

Mod.	005	01	02	03	04	
A	1230	1570	1700	1850	1920	mm
B	400	500	500	550	650	mm
C	1040	1110	1400	1790	1990	mm
D	440	470	485	650	650	mm
D1	80	90	350	410	610	mm
E	320	420	420	470	570	mm
FR	160	232	232	298	330	mm
FM	160	232	298	331	330	mm
F1	200	175	150	240	190	mm
F2	200	175	285	400	510	mm
GR	97	208	262	262	290	mm
GM	97	262	262	290	290	mm
G1	1/2"	3/4"	1"	1 1/4"	1 1/4"	Ø gas
Y	86	60	60	60	60	mm
weight	101	152	191	264	316	kg



■
WARNING FOR TRADERS

As part of its efforts to constantly improve its range of products, with the aim of increasing the level of Customer satisfaction, the Company stresses that the appearance, dimensions, technical data and accessories may be subject to variation. Consequently, ensure that the Customer is provided with updated documents.

FERROLI around the World

ITALY www.ferroli.it

SPAIN www.ferroli.es

FRANCE www.ferroli.fr

GERMANY www.ferroli.de

UNITED KINGDOM www.ferroli.co.uk

NETHERLANDS www.ferroli.nl

ROMANIA www.ferroli.ro

TURKEY www.ferroli.com.tr

POLAND www.ferroli.com.pl

UKRAINE www.ferroli.ua

RUSSIA www.ferroli.ru

BELARUS www.ferroli.by

IRAN www.ferroli.ir

CHINA www.ferroli.com.cn

VIETNAM www.ferroli.com.vn



Ferroli spa
37047 San Bonifacio (VR) Italy
Via Ritonda 78/A
tel. +39.045.6139411
fax +39.045.6103595
www.ferroli.it