


# SKY F

## WALL-HUNG INSTANTANEOUS GAS WATER HEATER, ROOM SEALED, ELECTRONIC IGNITION





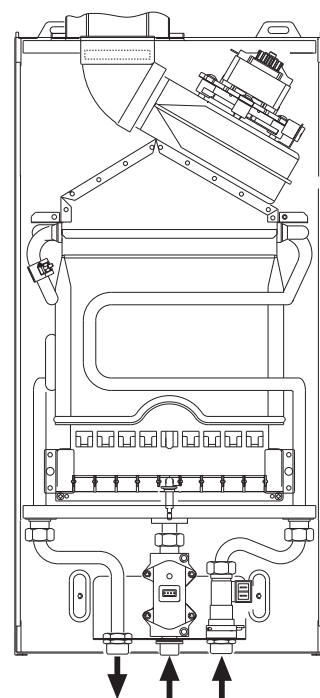

- Compact heat exchanger made completely of copper
- **Evolved Combustion System:** electronic monitoring of combustion quality, which ensures the best operation depending on the different thermal load and chimney draught
- Steplessly output **modulation** from 36% to 100%
- Simple and intuitive **LCD** interface
- **Ready for connection to solar systems:** can operate in combination with domestic hot water pre-heating systems
- Very **compact** dimensions
- 230V power supply
- Certified also for operation with **butane** (G30) or **LPG** (G31)

### SCHEME



#### FLUES ACCESSORIES:

please consult section reserved to traditional boilers.

MODEL			F 11	F 14	F 17
Erp Class					
Heat input	Min	kW	8,3	10,3	12,6
	Max	kW	21,7	26,9	32,9
Heat output	Min	kW	7,1	8,8	10,7
	Max	kW	19,2	23,9	29,2
Efficiency		Pmax %	88,5	88,7	88,9
Working pressure	Min	bar	0,20	0,20	0,20
	Max	bar	10	10	10
DHW flow rate	Δt 25°C	l/min	11,0	13,7	16,8
	Δt 50°C	l/min	5,5	6,9	8,4
Empty weight		kg	13	14	17
Dimensions	WxHxD	mm	295x595x195	335x595x250	375x595x290